

**Fishery Data Series No. 10-94**

---

---

**Sonar Estimation of Chum Salmon Passage in the  
Aniak River, 2008**

by

**Malcolm S. McEwen**

---

---

December 2010

Alaska Department of Fish and Game

Divisions of Sport Fish and Commercial Fisheries



## Symbols and Abbreviations

The following symbols and abbreviations, and others approved for the *Système International d'Unités* (SI), are used without definition in the following reports by the Divisions of Sport Fish and of Commercial Fisheries: Fishery Manuscripts, Fishery Data Series Reports, Fishery Management Reports, and Special Publications. All others, including deviations from definitions listed below, are noted in the text at first mention, as well as in the titles or footnotes of tables, and in figure or figure captions.

<b>Weights and measures (metric)</b>		<b>General</b>		<b>Mathematics, statistics</b>	
centimeter	cm	Alaska Administrative Code	AAC	<i>all standard mathematical signs, symbols and abbreviations</i>	
deciliter	dL	all commonly accepted abbreviations	e.g., Mr., Mrs., AM, PM, etc.	alternate hypothesis	$H_A$
gram	g	all commonly accepted professional titles	e.g., Dr., Ph.D., R.N., etc.	base of natural logarithm	$e$
hectare	ha	at	@	catch per unit effort	CPUE
kilogram	kg	compass directions:		coefficient of variation	CV
kilometer	km	east	E	common test statistics	(F, t, $\chi^2$ , etc.)
liter	L	north	N	confidence interval	CI
meter	m	south	S	correlation coefficient (multiple)	R
milliliter	mL	west	W	correlation coefficient (simple)	r
millimeter	mm	copyright	©	covariance	cov
		corporate suffixes:		degree (angular)	$^\circ$
<b>Weights and measures (English)</b>		Company	Co.	degrees of freedom	df
cubic feet per second	ft <sup>3</sup> /s	Corporation	Corp.	expected value	$E$
foot	ft	Incorporated	Inc.	greater than	>
gallon	gal	Limited	Ltd.	greater than or equal to	$\geq$
inch	in	District of Columbia	D.C.	harvest per unit effort	HPUE
mile	mi	et alii (and others)	et al.	less than	<
nautical mile	nmi	et cetera (and so forth)	etc.	less than or equal to	$\leq$
ounce	oz	exempli gratia (for example)	e.g.	logarithm (natural)	ln
pound	lb	Federal Information Code	FIC	logarithm (base 10)	log
quart	qt	id est (that is)	i.e.	logarithm (specify base)	log <sub>2</sub> , etc.
yard	yd	latitude or longitude	lat. or long.	minute (angular)	'
		monetary symbols (U.S.)	\$, ¢	not significant	NS
<b>Time and temperature</b>		months (tables and figures): first three letters	Jan, ..., Dec	null hypothesis	$H_0$
day	d	registered trademark	®	percent	%
degrees Celsius	°C	trademark	™	probability	P
degrees Fahrenheit	°F	United States (adjective)	U.S.	probability of a type I error (rejection of the null hypothesis when true)	$\alpha$
degrees Kelvin	K	United States of America (noun)	USA	probability of a type II error (acceptance of the null hypothesis when false)	$\beta$
hour	h	U.S.C.	United States Code	second (angular)	"
minute	min	U.S. state	use two-letter abbreviations (e.g., AK, WA)	standard deviation	SD
second	s			standard error	SE
				variance	
<b>Physics and chemistry</b>				population sample	Var var
all atomic symbols					
alternating current	AC				
ampere	A				
calorie	cal				
direct current	DC				
hertz	Hz				
horsepower	hp				
hydrogen ion activity (negative log of)	pH				
parts per million	ppm				
parts per thousand	ppt, ‰				
volts	V				
watts	W				

***FISHERY DATA SERIES NO. 10-94***

**SONAR ESTIMATION OF CHUM SALMON PASSAGE IN THE ANIAK  
RIVER, 2008**

by  
Malcolm S. McEwen  
Alaska Department of Fish and Game, Division of Commercial Fisheries, Fairbanks

Alaska Department of Fish and Game  
Division of Sport Fish, Research and Technical Services  
333 Raspberry Road, Anchorage, Alaska, 99518-1599

December 2010

ADF&G Fishery Data Series was established in 1987 for the publication of Division of Sport Fish technically oriented results for a single project or group of closely related projects, and in 2004 became a joint divisional series with the Division of Commercial Fisheries. Fishery Data Series reports are intended for fishery and other technical professionals and are available through the Alaska State Library and on the Internet: <http://www.sf.adfg.state.ak.us/statewide/divreports/html/intersearch.cfm> This publication has undergone editorial and peer review.

*Malcolm S. McEwen,  
Alaska Department of Fish and Game, Division of Commercial Fisheries,  
1300 College Road, Fairbanks, Alaska 99701-1599, USA*

*This document should be cited as:*

*McEwen, M. S. 2010. Sonar estimation of chum salmon passage in the Aniak River, 2008. Alaska Department of Fish and Game, Fishery Data Series No. 10-94, Anchorage.*

The Alaska Department of Fish and Game (ADF&G) administers all programs and activities free from discrimination based on race, color, national origin, age, sex, religion, marital status, pregnancy, parenthood, or disability. The department administers all programs and activities in compliance with Title VI of the Civil Rights Act of 1964, Section 504 of the Rehabilitation Act of 1973, Title II of the Americans with Disabilities Act (ADA) of 1990, the Age Discrimination Act of 1975, and Title IX of the Education Amendments of 1972.

**If you believe you have been discriminated against in any program, activity, or facility please write:**

ADF&G ADA Coordinator, P.O. Box 115526, Juneau, AK 99811-5526

U.S. Fish and Wildlife Service, 4401 N. Fairfax Drive, MS 2042, Arlington, VA 22203

Office of Equal Opportunity, U.S. Department of the Interior, 1849 C Street NW MS 5230, Washington DC 20240

**The department's ADA Coordinator can be reached via phone at the following numbers:**

(VOICE) 907-465-6077, (Statewide Telecommunication Device for the Deaf) 1-800-478-3648, (Juneau TDD) 907-465-3646, or (FAX) 907-465-6078

**For information on alternative formats and questions on this publication, please contact:**

ADF&G, Division of Sport Fish, Research and Technical Services, 333 Raspberry Road, Anchorage AK 99518 (907)267-2375.

# TABLE OF CONTENTS

	<b>Page</b>
LIST OF TABLES.....	ii
LIST OF FIGURES.....	ii
LIST OF APPENDICES.....	ii
ABSTRACT.....	1
INTRODUCTION.....	1
History.....	1
OBJECTIVES.....	3
METHODS.....	3
Site Description.....	3
Hydroacoustic Data Acquisition.....	4
Equipment.....	4
Transducer Deployment.....	4
Sampling Procedures.....	5
Equipment Settings.....	5
Analytical Methods.....	5
Abundance Estimation.....	5
Missing Data.....	7
ASL Sampling.....	7
Equipment and Procedures.....	7
Environmental Measurements.....	8
RESULTS.....	9
Fish Passage Estimates.....	9
Missing Data.....	9
ASL Sampling.....	9
Environmental Information.....	9
Climate and River Measurements.....	9
DISCUSSION.....	9
Fish Passage Estimates.....	9
ASL Sampling.....	10
Environmental Information.....	10
ACKNOWLEDGEMENTS.....	10
REFERENCES CITED.....	10
TABLES AND FIGURES.....	13
APPENDIX A. PROJECT HISTORY.....	25

## LIST OF TABLES

<b>Table</b>		<b>Page</b>
1.	Daily and cumulative fish passage estimates for left and right banks, percent passage for left and right banks and cumulative passage, Aniak River sonar, 2008.....	14
2.	Age and sex composition of chum salmon for 4 sampling strata, Aniak River sonar, 2008. ....	15

## LIST OF FIGURES

<b>Figure</b>		<b>Page</b>
1.	Kuskokwim River Area, with lower river fishing districts (W-1, W-2, W-4, W-5) delineated.....	16
2.	Historical sonar passage from 1980 to 2007 Aniak River sonar.. ....	17
3.	Location of Aniak River sonar site, 2008.....	18
4.	DIDSON Sonar equipment schematic, Aniak River sonar, 2008.....	19
5.	Daily passage estimates on left bank, right bank and cumulative passage estimates at Aniak River sonar, 2008. ....	20
6.	Historical run timing 1980–2007, Aniak River Sonar.....	20
7.	Water level Aniak River sonar, 2008. ....	21
8.	Air and water temperatures, Aniak River sonar, 2008. ....	21
9.	Daily water temperature by time, Aniak River sonar, 2008.....	22
10.	Corrected historical passage with running average at the Aniak River sonar project, 1980 to 2008. ....	22
11.	Cumulative fish passage estimates, Aniak River sonar, 2004 to 2008. ....	23

## LIST OF APPENDICES

<b>Appendix</b>		<b>Page</b>
A1.	Timetable of developmental changes of the Aniak River sonar project, 1980–2008. ....	26

## ABSTRACT

The Aniak River sonar project has provided daily fish passage estimates for most years since 1980. During this time, the project has undergone important modifications including changing from the original Bendix sonar to dual-beam in 1996 and to a high frequency imaging sonar (DIDSON) in 2004. In 2008, the project maintained the sampling schedule adopted in 2003 in which the sonar operated for three 4-hour blocks each day (0000–0400, 0800–1200, and 1600–2000 hours). The Aniak River sonar project was operational from June 26 through July 31, 2008. During this period, an estimated 427,911 fish (SE 9,481) passed through the ensonified area, the majority of which are assumed to be chum salmon *Oncorhynchus keta*. The peak passage of 33,618 fish occurred on July 25 and the 50% passage date occurred on July 19. Age-0.3, -0.4 and -0.5 chum salmon comprised 29.7%, 65.9% and 4.4% of the escapement estimate, respectively.

Key words: Aniak River, Kuskokwim River, chum salmon, *Oncorhynchus keta*, DIDSON, sonar, hydroacoustic.

## INTRODUCTION

### HISTORY

The Kuskokwim River subsistence and commercial salmon fishery in June and July is directed toward the harvest of chum salmon *Oncorhynchus keta* and Chinook salmon *O. tshawytscha*. From 1998 to 2007, an average of 53,571 chum salmon were harvested annually for subsistence purposes in the Kuskokwim area. Commercial chum salmon harvests in Districts 1 (W-1) and 2 (W-2) from 1998 to 2007 averaged 39,871 fish, from 2001 to 2003 no market existed for chum salmon in the Kuskokwim River fishery, and only modest commercial fisheries were prosecuted from 2004 to 2006 (Estensen et al. 2009).

Timely estimates of run strength and escapement are important to management of the Kuskokwim River fishery. Based on past sonar escapement estimates and aerial survey indices of abundance, the Aniak River is believed to be one of the largest producers of chum salmon in the Kuskokwim River drainage (Francisco et al. 1995). Prior tagging studies have shown that chum salmon migrate from the upper end of District 1 to the Aniak River sonar site in about 7 or 8 days (ADF&G 1961, 1962). Because of the Aniak River's proximity to the Kuskokwim River commercial and subsistence fisheries (Figure 1), the Aniak River sonar project provides timely estimates of chum salmon passage.

The Aniak River sonar project began operating in 1980 and has undergone numerous changes in equipment and methodologies during this time. From 1980 to 1995, Aniak River escapement data were collected using an echo counting and processing transceiver manufactured by Bendix Corporation.<sup>1</sup> Data were collected with a single transceiver mounted on an 18.3 m artificial substrate located on the right bank and expanded to estimate total fish passage beyond the ensonified range (Schneiderhan 1989). Cumulative adjusted daily totals were subjectively estimated to be 150% of the actual count for the initial years of operation. Behavior of chum salmon observed during aerial spawning surveys of the Aniak River, and visual observations of fish migration patterns reported for the Anvik River (Buklis 1981) lead to the supposition that on the order of two-thirds of the run passed through the ensonified portion of the river. A second sonar counter was temporarily operated for a few days in 1984 to refine the expansion factor applied to the daily counts (Schneiderhan 1985). The second counter was deployed 1.5 km downstream from the existing counter and alternately operated on each bank. The proportions between daily counts at the historical site and each bank of the downstream site over a 16-day

---

<sup>1</sup> Product names used in this report are included for scientific completeness, but do not constitute a product endorsement.

period resulted in a new expansion factor of 162%. This expansion factor was used from 1984 through 1995 to readjust counts from 1980 to 1983. In addition to the expansion of daily totals, sonar estimates were extrapolated for salmon escapement occurring before and after the operational period.

In 1996, the Aniak River sonar project was redesigned to provide full river ensonification with user-configurable sonar equipment operating 24-hours per day on both banks throughout the chum salmon migration. A new sonar data collection site was established 1.5 km downstream from the historical site. Seasonal sonar estimates were not extrapolated for salmon escapement before or after the operational period. Sonar operations from 1997 to 2002 remained essentially unchanged. During the winter of 2002, different sonar sampling regimes were explored in order to reduce operational costs. It was found a sampling schedule consisting of an alternating 4 hours on, followed by 4 hours off, presented the least overall error (+/- 2.7%) with a moderate amount of daily variability. In 2003, instead of sampling 24 hours per day, the project implemented the alternating schedule. Preparations to transition to a dual frequency identification sonar (DIDSON) were also initiated in 2003 (Sandall and Pfisterer 2006) and in 2004, the dual-beam system was replaced with the DIDSON. Sonar operations in 2008 were consistent with the changes made in 2003 and 2004.

Examination of the relationship of counts made in 2003 using BioSonics and DIDSON equipment has shown a density dependent relationship, with the BioSonics estimates approximately 70% of those derived using DIDSON (Sandall and Pfisterer 2006). Using the density dependent relationship, the fish estimates from 1980 to 2003 have been adjusted to equivalent DIDSON estimates (Carl Pfisterer, Commercial Fisheries Biologist, ADF&G, Fairbanks; personal communication; Figure 2).

In the early 1980s, sonar counts were apportioned to chum or Chinook salmon using catch information from test gillnets. In 1986, the Chinook salmon apportionment objective was discontinued due to test fishing techniques were incapable of providing adequate sample sizes (Schneiderhan 1988). A 1995 Aniak River sonar test fish feasibility study indicated that a species apportionment program was logistically feasible at the current site (Knuepfer 1995). The primary impediment to implementing such a program was a lack of funding. In response to extremely poor returns of chum and coho salmon in 1997 and 1998 the federal government (Western Alaska Fisheries Disaster) made funds available for Kuskokwim River salmon fisheries research and management (Fair 2000). In 2001 and 2002, a new species apportionment feasibility study was conducted using these funds. This study attempted to determine if test fishing with gillnets could provide an acceptable method of apportioning sonar counts to fish species. The primary reason for discontinuing the study in 2003 is that it is not possible to drift gillnets in the areas of highest fish passage due to the river profile, snags and similar to 2001 82% of the overall catch were chum salmon (McEwen 2006). Given the consistently high proportion of chum salmon observed during the apportionment portion of the project, staff do not consider the small increase in the accuracy and precision of the estimates as adequate to continue the apportionment program considering the expense, difficulty, and unacceptable mortality associated with drift gillnetting.

Although fish passage estimates were not apportioned by species, periodic net sampling was employed to monitor broad changes in species composition, corroborate acoustically detected abundance trends, and obtain chum salmon age, sex, and length (ASL) samples. From 1981 through 1985, attempts at beach seine test fishing and carcass sampling proved unsuccessful at obtaining adequate sample sizes for ASL determination. In 1986, ASL sampling activities were

discontinued to decrease operating costs when it was noted that the Aniak River chum salmon ASL data were similar to the commercial catch results from the lower Kuskokwim River districts (Schneiderhan 1988). In 1996, beach seining procedures were reexamined and a method was devised to provide large enough samples to estimate ASL for chum salmon. ASL sampling continues to be an important component of the project.

Escapement objectives for the Aniak River have undergone a number of modifications since the project's inception. Salmon escapement objectives were tentatively set at 250,000 chum and 25,000 Chinook salmon in 1981, and formally established in 1982. The chum salmon objective was derived subjectively by relating historical sonar passage estimates to trends in harvest and aerial survey indices (Schneiderhan 1982). In 1983, a review of the escapement objective based upon sonar estimates and other escapement indices suggested that the 1980–1981 Aniak River sonar estimates likely represented record escapements, and much smaller escapements would probably provide adequate future spawning stocks and a sustainable harvest (Schneiderhan 1984). With the discontinuation of species apportionment in 1985, the sonar-based escapement objective was changed from species-specific objectives to 250,000 estimated fish counts (Schneiderhan 1985). After the implementation of the *Salmon Escapement Goal Policy* in 1992, the Aniak River escapement objective was termed a biological escapement goal (BEG; Buklis 1993). During the winter of 2003 and 2004, the Arctic-Yukon-Kuskokwim (AYK) escapement goal team recommended a sustainable escapement goal (SEG) of 210,000 to 370,000 chum salmon. In 2007, the SEG was revised upward to 220,000 to 480,000 chum salmon (Brannian et al. 2006). The SEG is defined as a level of escapement, indicated by an index or an escapement estimate, that is known to provide for sustained yield over a 5 to 10 year period and is used in situations where a BEG cannot be estimated due to the absence of a stock specific catch estimate (Brannian et al. 2006). A timetable of developmental changes for the sonar project is presented in Appendix A1.

## OBJECTIVES

The objectives of the Aniak River sonar project are to:

1. Estimate chum salmon abundance in the Aniak River using DIDSON sonar from June 26 through July 31.
2. Estimate ASL composition of the total Aniak River chum salmon escapements from a minimum of 2 samples collected from each third of the run, such that simultaneous 95% confidence intervals of age composition in each sample are no wider than 0.20 ( $\alpha=0.05$  and  $d=0.10$ ).
3. Monitor selected climatic and hydrological parameters daily at the project site for use as baseline data.

## METHODS

### SITE DESCRIPTION

The Aniak River sonar project site is located in Section 5 of T16N, R56W (Seward Meridian), approximately 19 km upstream from the mouth of the Aniak River on state land and permitted by Alaska Department of Natural Resources (DNR) permit # 13916. The main camp is situated at 61° 30.163' N, 159° 22.464' W (Figure 3). The Aniak River originates in the Aniak Lake basin about 145 km east and 32 km south of Bethel, Alaska. It flows north for nearly 129 km, where it joins the Kuskokwim River 1.6 km upstream from the community of Aniak.

The Aniak river, at the sonar site, is characterized by broad meanders, with large gravel bars on the inside bends and cut banks with exposed soil, tree roots, and snags on the outside bends. Numerous depth profile transects were conducted in the immediate vicinity of the sonar site, using a Lowrance model X-16 chart recording fathometer to determine the best location to deploy the sonar transducers. As with past years, we were able to use the same location due to the sites stability. The river substrate at the sonar site is fine, smooth gravel, sand, and silt. The left bank river bottom slopes gradually to the thalweg at roughly 35–45 m, while the right bank river bottom slopes steeply to the thalweg at about 5–10 m, depending on water level.

## **HYDROACOUSTIC DATA ACQUISITION**

### **Equipment**

Two DIDSON units were deployed at the Aniak sonar site, one for each bank. The sonar units operate at 1.1 MHz. The left bank DIDSON was mounted on an aluminum tripod and manually aimed. The right bank DIDSON was mounted on an aluminum tripod and remotely aimed with a set of HTI rotators allowing movement in two axes. A Remote Ocean Systems model pan and tilt control unit was connected to the rotators and provided horizontal and vertical positioning accurate to within  $\pm 0.3^\circ$ .

Each DIDSON was controlled by a laptop computer running either version 5.09 or 5.11 of the DIDSON software. A 152.4 m cable transferred power and data between a “topside box” and the DIDSON unit in the water. For the right bank, a Honda model EU-2000 generator provided power for all equipment. An Ethernet cable routed data between the topside box and a 10/100 BT hub and then to a laptop computer. A 250 GB RAID enclosure was connected to the laptop for storing all data from both banks (Figure 4). The enclosure was configured as RAID 1, allowing redundant copies of the data on 2 separate hard drives within the enclosure in the event one of the mechanisms failed.

The left bank sonar electronic equipment was housed in a portable canvas wall tent and the equipment was powered by a single Honda model EU-1000 generator. A wireless Ethernet router (D-Link DWL-2100AP) transferred the data from the left bank DIDSON to the controlling laptop on the right bank where the data were saved to the RAID drive (Figure 4).

### **Transducer Deployment**

The transducers were attached to an aluminum tripod deployed on each bank, and oriented perpendicular to the current. The wide axis of each beam was oriented horizontally and positioned close to the river bottom to maximize residence time of targets in the beam. Transducers were placed offshore 4 to 10 m from the right bank, and 10 to 20 m from the left bank. Daily visual inspections confirmed proper placement and orientation of the transducers and alerted operators as to when the transducers needed to be repositioned to accommodate changing water levels. The majority of the river (72–88% depending on water level) was ensounded by sampling both the right and left banks out to 20 m.

Partial weirs were erected perpendicular to the current and extended from the shore 1 to 3 m beyond the transducers. These weirs moved chum salmon, Chinook salmon, and other large fish offshore and in front of the transducers, preventing them from passing undetected behind the transducers. The 4.4 cm gap between weir pickets was selected to divert large fish (primarily chum and Chinook salmon) while allowing passage of small, resident, non-target species, (suckers, *Catostomus* sp., whitefish, *Coregonus*, and rainbow trout, *O. mykiss*).

## Sampling Procedures

Sonar project activities commenced on June 26 and ended on July 31, 2008. Hydroacoustic sampling began at 0800 hours on June 26 on right and left bank and ran every day until 2000 hours on July 31. Daily estimates were transmitted via single side band radio or satellite phone to area managers in Bethel at 0730 hours the following morning.

Acoustic sampling was conducted on both banks for three 4-hour shifts each day, 7 days per week, except for short periods when the generator was serviced or transducer adjustments were made. This sampling was consistent with the 2003 through 2007 field seasons but was a significant change from seasons prior to 2003 when sampling occurred 24 hours per day. Three fishery technicians operated and monitored equipment at the sonar site while rotating through shifts (one person per shift) occurring at 0000–0400, 0800–1200, and 1600–2000 hours. The technicians identified and tallied fish traces from the echogram recordings. All fish were counted except for very small fish, which are assumed not to be salmon. The number of fish traces were then summed over 15 minute periods and recorded onto forms. Completed data forms were entered into a spreadsheet and checked by the crew leader. All data was saved to the RAID drive in 15 minute intervals during the 4 hour shift for later review as an echogram and/or video. All counting was done manually using the echogram and marking fish traces with the computer mouse. The video was used to verify fish target and fish size.

The crew recorded all project activities in a project logbook. The logbook was used to document daily events of sonar activities and system diagnostics. During each shift, crew members were required to: 1) read the log from the previous shift; 2) sign the log book, including date and time of arrival and departure; 3) record equipment problems, factors contributing to problems, and resolution of problems; 4) record equipment setting adjustments and their purpose; 5) record observations concerning weather, wildlife, boat traffic, etc.; and 6) record visitors to the site, including their arrival and departure times.

## Equipment Settings

The DIDSON is a high frequency, multi-beam sonar with a unique acoustic lens system designed to focus the beam to create high resolution images. Sound pulses were generated by the sonar at center frequencies of 1.1 MHz. DIDSON simultaneously transmits on, and then receives from sets of 12 beams. Images or frames are built in sequences of these sets of pings. At frequencies of 1.1 MHz, 48 beams (4 sets of 12) 0.6° apart from each other on a horizontal plane are utilized to form the image. The right bank and left bank both sampled at a range from 0.83 m to 20 m and the frame rate was set to 4 frames per second.

## ANALYTICAL METHODS

### Abundance Estimation

Daily passage  $\hat{y}_{dz}$  on day  $d$  and bank  $z$  was estimated by first calculating the hourly passage rate  $r_{dzp}$  for each period  $p$ :

$$r_{dzp} = \frac{\sum_{s=1}^{16} y_{dzps}}{4}, \quad (1)$$

where the rate is calculated by summing the 16 individual 15-minute observations  $s$ , collected during the 4-hour sample period, and dividing by the total number of hours. The average hourly passage rate for the day  $\hat{r}_{dz}$  is then estimated from the passage rates for the 3 periods,

$$\hat{r}_{dz} = \frac{\sum_{p=1}^3 r_{dzp}}{3}. \quad (2)$$

Finally, the daily passage for bank  $z$  is estimated by multiplying the average hourly passage rate by 24 (the number of hours in the day):

$$\hat{y}_{dz} = 24\hat{r}_{dz}. \quad (3)$$

The total daily passage is estimated by adding the daily passage for both banks. Note that the same result is obtained by summing all of the individual 15-minute samples collected in one 24-hour period and multiplying by the reciprocal of the fraction of the day sampled (i.e.  $24/12=2$ ).

Sonar sampling periods were spaced at regular (systematic) intervals. Treating the systematically sampled sonar counts as a simple random sample may overestimate the variance of the total since sonar counts can be highly auto correlated (Wolter 1985). To accommodate these data characteristics, a variance estimator based on the squared differences of successive observations was utilized. This estimator was adapted from the estimator used at the Yukon River sonar project (Pfisterer 2002). The variance for the passage estimate for bank  $z$  on day  $d$  was estimated as:

$$\hat{Var}_{y_{dz}} = 24^2 \cdot \frac{1 - f_{dz}}{n_{dz}} \cdot \frac{\sum_{p=2}^{n_{dz}} (r_{dzp} - r_{dz,p-1})^2}{2(n_{dz} - 1)}, \quad (4)$$

where  $n_{dz}$  is the number of periods sampled in the day (3) and  $f_{dz}$  is the fraction of the day sampled ( $12/24=0.5$ ). Finally, since the passage estimates are assumed independent between zones and among days, the total variance was estimated as the sum of the variances:

$$\hat{Var}(\hat{y}) = \sum_d \sum_z \hat{Var}(\hat{y}_{dz}). \quad (5)$$

## Missing Data

Depending on the amount of time that was missed, the crew used different methods to make up for incomplete or missing counts.

If less than 10 minutes were missed in a sample, the count was expanded by the inverse of the fraction sampled:

$$\hat{y}_s = x_s(15/m_c) \quad (6)$$

Where 15 is the number of minutes in a complete sample,  $m_c$  is the number of minutes in the sample that were actually counted, and  $x_s$  is the number of fish counted.

If data from one or more complete samples was missing, counts were interpolated by averaging counts from samples before and after the missing sample(s) as follows:

$$\hat{y}_s = \left( 1/n \sum_{i=1}^n x_i \right) \left\{ \begin{array}{l} s = 1, n = 4 \\ s = 2, n = 6 \\ s = 3, n = 8 \end{array} \right\} \quad (7)$$

Where  $s$  is the number of missed samples,  $n$  is the number of samples used for interpolation (half before and half after the missing sample(s)), and  $x_i$  is the count for each sample  $i$ .

If more than 4 samples were missed, an XY scatterplot with a regression line was plotted using the known fish counts for the day from both left bank and right bank. The linear regression equation was then used to calculate missing fish counts for each missing sample  $s$ :

$$\hat{y}_s = a + bx_s \quad (8)$$

Where  $a$  and  $b$  are the regression coefficients,  $x$  equals the count for sample  $s$  on the opposite bank and  $\hat{y}_s$  is the estimated passage for missing sample  $s$ .

## ASL SAMPLING

### Equipment and Procedures

The gravel bar just upstream and on the opposite bank from the sonar camp was used as the sampling site over the past several years. Prior to 2003 the gravel bar in front of camp was used for collecting ASL samples, but this site became unusable due to snags. In recent years the gravel

bar just upstream has been used exclusively because it has few snags, which allows the net to drift smoothly and has led to more efficient sampling. The crew fished a 3 x 46 m (10 x 150 ft) green 7.0 cm mesh beach seine to obtain ASL samples from chum salmon. After attaching a 30 m line to one end of the seine, the seine was stacked in a plastic fish tote and placed in the stern of a skiff. The crew attached the opposite end of the seine to a pulley designed to pivot from the side of the skiff from the bow to the stern. As the skiff moved offshore, orientated upstream, the end of the 30 m lead was held in place by a crew member on shore. The skiff moved straight offshore until all of the lead line was deployed and the seine started to peel out of the tote. The driver maneuvered the skiff upstream and inshore, deploying the entire length of the seine. When the skiff reached the shore, the seine was released from the pulley and allowed to drift downstream while the crew guided it next to the shore. The lead was pulled in just enough to form a hook shape to the offshore end of the seine. The crew drifted the entire seine in this formation for approximately 100 m before the lead line was pulled in to close the set.

All captured fish except chum salmon were tallied by species, fin clipped, recorded, and released. Chum salmon were placed in a live box for sampling. One scale was taken from the preferred area of each chum salmon for use in age determination (INPFC 1963). Scales were wiped clean and mounted on gum cards. Sex was determined by visually examining external morphological characteristics, such as kype development, roundness of the belly, and the presence or absence of an ovipositor. Length was measured to the nearest 5 mm from mid eye to tail fork. Fish that were sampled had the adipose fin clipped so that they were not sampled twice if recaptured. All measurements were recorded in a Rite in the Rain® notebook and later transcribed to standard mark-sense forms.

The crew followed a systematic sampling design whereby intensive sampling was conducted on 2 days each week (Tuesday and Thursday's, or until a sample size goal of  $n=210$  was reached). The sampling goal of  $n=210$  was set such that simultaneous 95% confidence intervals of age composition in each weekly period were no wider than 0.20 ( $\alpha=0.05$  and  $d=0.10$ ) (Molyneux and Dubois 1996). All scales and ASL data were sent to the Bethel ADF&G office for analysis by research staff.

To estimate the age and sex composition of chum salmon escapement in the Aniak River, daily passage estimates were temporally stratified to correspond with ASL sampling periods. Within each stratum, estimates of age and sex composition were applied to the sum of the chum salmon passage to generate an estimate of the number of fish in each age-sex category. The numbers of fish were then summed by age-sex category over all strata to estimate the total season passage.

## **ENVIRONMENTAL MEASUREMENTS**

Water temperature was measured at the sonar site using a HOBO water temperature logger which electronically recorded the temperature 4 times per day. The data were downloaded to a laptop computer at the end of the season. At the main camp, the air temperature was recorded several times each day from a digital thermometer, and general weather and wind direction was noted. The crew used a staff gauge to measure the water level. The benchmark, located at the sonar site, degraded and became unusable in 2002; consequently, readings are not comparable across years.

# **RESULTS**

## **FISH PASSAGE ESTIMATES**

During the 2008 season 427,911 (SE 9,481) fish are estimated to have passed the sonar site. Of those, 40.2% passed on the left bank and 59.8% passed on the right bank. Figure 5 shows the daily passage rates by bank along with the cumulative season estimate. The peak total daily passage of 33,618 occurred on July 25 (Table 1). The 25%, 50%, and 75% quartile dates of passage were July 14, July 19, and July 25 respectively. The 2008 run timing was about 5 days late at the mid-point, compared with the historical record (Figure 6).

## **MISSING DATA**

A total of 5.1 hours (2.2%) on the left bank and 7.3 hours (2.7%) on the right bank of sampling time were missed, because of maintenance, system diagnostic tests, moving the tripod, or aiming the transducer to compensate for changing water levels throughout the season.

## **ASL SAMPLING**

A total of 36 beach seine sets were completed and, from these, 668 ASL samples from migrating chum salmon were obtained. Of those samples, 484 scales were analyzed postseason with 65.9% falling in the 0.4 age class, 29.7% comprising the 0.3 age class, and 4.4% in the 0.5 age class. Age 0.3 chum salmon increased steadily throughout the run from 15.4% at the beginning to 49.1% at the end. Age 0.4 chum salmon came in strong at the beginning of the run (77.9%) and decreased to 46.8% by the end of the run. There were no age 0.2 fish. Female chum salmon accounted for 52.1% of the overall run (Table 2).

## **ENVIRONMENTAL INFORMATION**

### **Climate and River Measurements**

Water levels steadily went down for the season. There were several rainy days during the season that raised the water level 10–20 cm for a few days and then would steadily decrease, to the lowest levels of the season at the end of July (Figure 7). Daily air temperatures fluctuated between 2.6 °C (July 22) and 20 °C (July 6) over the project operational period (Figure 8). Water temperatures were measured 4 times per day (0000, 0600, 1200, 1800) the lowest average temperature by time was 8.2°C at 1200 the highest average temperature was 13.3°C at 1800 (Figure 9). The average water temperature over the operational period of the project was 10.2°C.

## **DISCUSSION**

When staff arrived at the sonar site in late-June the water level was high, but did not cause any delay in getting the sonar in the water and conducting the ASL sampling. We had the sonar in the water on 24 June which is 2 days ahead of schedule. The ASL sampling started at the beginning of July.

## **FISH PASSAGE ESTIMATES**

We were able to meet Objective 1: collecting fish abundance data using sonar. The estimated passage for 2008 was below the running average (Figure 10). The fish count was the lowest in the past 5 years (Figure 11). When compared to the historical record this year's run was 4 to 5 days behind the historical average (Figure 6). Similar to 2002 through 2007, the 2008 daily

passage estimates followed a roughly sinusoidal pattern with peaks separated in time by 4 or 5 days (Figure 5). Fish were distributed fairly evenly between left and right bank. In previous years, passage has been biased to one bank or the other, and often this bias changed as water levels changed. When the water level is low a gravel bar becomes exposed down stream of the sonar on right bank. Fair (2000) noted that when this gravel bar becomes exposed during low water a high percentage of the fish are diverted over to left bank.

### **ASL Sampling**

We were able to meet Objective 2: collecting the age, sex and length samples from the Aniak River chum salmon escapement. The age distribution of the catch in 2008 did not exhibit any anomalies. As in past years, the 2008 chum salmon run was predominantly age-0.3 (29.7%) and age-0.4 (65.9%) fish. The age-0.4 fish were the dominant age class for the entire run with females dominating this age class (51.2%). The age-0.3 fish had more females than males. For the overall run, female fish accounted for 52.1% of the run.

### **ENVIRONMENTAL INFORMATION**

We were able to meet Objective 3: monitoring selected climatic and hydrological parameters daily at the project site. When we arrived the water level was moderate to high but we were able to install the water height gage and electronic water temperature sensors in a timely fashion. Water levels continued to rise through the first half of the season due to rain, but then went steadily down during the second half (Figure 7). Air and water temperatures were moderate (Figure 8).

### **ACKNOWLEDGEMENTS**

The author wishes to thank seasonal ADF&G staff including Jody Lozori, Dave Lokken and Doug Lucus for the collection of hydroacoustic and ASL data. The Kuskokwim Native Association and David Orabutt provided invaluable logistical assistance in Aniak. Carl Pfisterer, AYK Sonar Biologist, and Bruce McIntosh, Regional Sonar Biologist, provided project oversight, technical support, and review of this report. This project was operated using State of Alaska General Funds.

### **REFERENCES CITED**

- ADF&G (Alaska Department of Fish and Game). 1961. Kuskokwim River salmon tagging studies, 1961. Alaska Department of Fish and Game, Division of Commercial Fisheries, Kuskokwim Salmon Stock Separation Report No. 1, Anchorage.
- ADF&G (Alaska Department of Fish and Game). 1962. Kuskokwim River salmon tagging studies, 1962. Alaska Department of Fish and Game, Division of Commercial Fisheries, Kuskokwim Salmon Stock Separation Report No. 2, Anchorage.
- Brannian, L. K., M. J. Evenson, and J. R. Hilsinger. 2006. Escapement goal recommendations for select Arctic-Yukon-Kuskokwim region salmon stocks, 2007. Alaska Department of Fish and Game, Fishery Manuscript No. 06-07, Anchorage.
- Buklis, L. S. 1981. Yukon River salmon studies. Project No. AFC-63-4, Anadromous Fish Conservation Act. NOAA National Marine Fisheries Service. Technical report for period July 1, 1980 to June 30, 1981, Anchorage.

## REFERENCES CITED, Continued

- Buklis, L. S. 1993. Documentation of Arctic-Yukon-Kuskokwim region salmon escapement goals in effect as of the 1992 fishing season. Alaska Department of Fish and Game, Division of Commercial Fisheries Management and Development, Regional Information Report 3A93-03, Anchorage.
- Estensen, J. L., D. B. Molyneaux, and D. J. Bergstrom. 2009. Kuskokwim River salmon stock status and Kuskokwim area fisheries, 2009; a report to the Alaska Board of Fisheries. Alaska Department of Fish and Game, Special Publication No. 09-21, Anchorage.
- Fair, L. 2000. Aniak River sonar project report 1999. Alaska Department of Fish and Game, Division of Commercial Fisheries, Regional Information Report 3A00-10, Anchorage.
- Francisco, K. R., C. A. Anderson, C. Burkey Jr., M. Fogarty, D. B. Molyneaux, C. Utermohle, and K. Vaught. 1995. Annual management report for the subsistence and commercial fisheries of the Kuskokwim Area, 1994. Alaska Department of Fish and Game, Division of Commercial Fisheries, Regional Information Report 3A95-15, Anchorage.
- INPFC (International North Pacific Fisheries Commission). 1963. Annual report, 1961. Vancouver, British Columbia.
- Knuepfer, G. 1995. Aniak River sonar test fishing feasibility report. Alaska Department of Fish and Game, Division of Commercial Fisheries, Regional Information Report 3A95-34, Anchorage.
- McEwen, M. S. 2006. Sonar estimation of chum salmon passage in the Aniak River 2002. Alaska Department of Fish and Game, Division of Commercial Fisheries, Fishery Data Series No. 06-33, Anchorage.
- Molyneaux, D., and L. Dubois. 1996. Salmon age, sex and length catalog for the Kuskokwim area, 1995 progress report. Alaska Department of Fish and Game, Division of Commercial Fisheries Management and Development, Regional Information Report 3A96-31, Anchorage.
- Pfisterer, C. T. 2002. Estimation of Yukon River salmon passage in 2001 using hydroacoustic methodologies. Alaska Department of Fish and Game, Division of Commercial Fisheries, Regional Information Report 3A02-24, Anchorage.
- Sandall, H., and C. T. Pfisterer. 2006. Sonar estimation of chum salmon passage in the Aniak River, 2003. Alaska Department of Fish and Game, Division of Commercial Fisheries, Fishery Data Series No. 06-32, Anchorage.
- Schneiderhan, D. J. 1982. 1982 Aniak River sonar studies. Alaska Department of Fish and Game, Division of Commercial Fisheries, Kuskokwim Escapement Report No. 26, Anchorage.
- Schneiderhan, D. J. 1984. 1983 Aniak River sonar studies. Alaska Department of Fish and Game, Division of Commercial Fisheries, AYK Region, Kuskokwim Escapement Report No. 32, Anchorage.
- Schneiderhan, D. J. 1985. 1984 Aniak River sonar studies. Alaska Department of Fish and Game, Division of Commercial Fisheries, Kuskokwim Escapement Report No. 36, Anchorage.
- Schneiderhan, D. J. 1988. Aniak River salmon escapement study, 1985-1987. Alaska Department of Fish and Game, Division of Commercial Fisheries, Regional Information Report 3A88-17, Anchorage.
- Schneiderhan, D. J. 1989. Aniak River salmon escapement studies, 1989. Alaska Department of Fish and Game, Division of Commercial Fisheries, Regional Information Report 3A89-23, Anchorage.
- Wolter, K. M. 1985. Introduction to variance estimation. Springer-Verlag, New York.



## **TABLES AND FIGURES**

Table 1.—Daily and cumulative fish passage estimates for left and right banks, percent passage for left and right banks and cumulative passage, Aniak River sonar, 2008.

Date	Left Bank	Right Bank	Daily Total	Cumulative Total	LB % Passage	RB % Passage	Cumulative percent passage
26 Jun	129	72	201	201	0.1%	0.0%	0.0%
27 Jun	146	136	282	483	0.1%	0.1%	0.1%
28 Jun	72	275	347	829	0.0%	0.1%	0.2%
29 Jun	98	84	182	1,011	0.1%	0.0%	0.2%
30 Jun	66	614	680	1,691	0.0%	0.2%	0.4%
1 Jul	173	473	647	2,338	0.1%	0.2%	0.5%
2 Jul	378	1,055	1,433	3,771	0.2%	0.4%	0.9%
3 Jul	442	739	1,181	4,952	0.3%	0.3%	1.2%
4 Jul	694	1,946	2,640	7,592	0.4%	0.8%	1.8%
5 Jul	1,556	3,717	5,273	12,865	0.9%	1.5%	3.0%
6 Jul	2,902	6,530	9,432	22,297	1.7%	2.6%	5.2%
7 Jul	3,826	8,483	12,309	34,606	2.2%	3.3%	8.1%
8 Jul	2,070	5,814	7,884	42,490	1.2%	2.3%	9.9%
9 Jul	2,090	6,717	8,807	51,298	1.2%	2.6%	12.0%
10 Jul	1,986	6,192	8,178	59,476	1.2%	2.4%	13.9%
11 Jul	2,698	4,377	7,075	66,550	1.6%	1.7%	15.6%
12 Jul	2,940	5,646	8,586	75,137	1.7%	2.2%	17.6%
13 Jul	5,000	9,324	14,324	89,461	2.9%	3.6%	20.9%
14 Jul	10,954	15,477	26,431	115,892	6.4%	6.1%	27.1%
15 Jul	13,735	19,385	33,120	149,012	8.0%	7.6%	34.8%
16 Jul	6,998	12,598	19,596	168,608	4.1%	4.9%	39.4%
17 Jul	6,956	11,794	18,750	187,358	4.0%	4.6%	43.8%
18 Jul	7,194	9,980	17,174	204,532	4.2%	3.9%	47.8%
19 Jul	11,596	12,946	24,542	229,074	6.7%	5.1%	53.5%
20 Jul	7,228	11,864	19,092	248,166	4.2%	4.6%	58.0%
21 Jul	4,834	7,724	12,558	260,724	2.8%	3.0%	60.9%
22 Jul	5,474	8,415	13,889	274,613	3.2%	3.3%	64.2%
23 Jul	6,836	9,058	15,894	290,507	4.0%	3.5%	67.9%
24 Jul	8,694	9,995	18,689	309,196	5.0%	3.9%	72.3%
25 Jul	17,992	15,626	33,618	342,814	10.4%	6.1%	80.1%
26 Jul	9,000	12,044	21,044	363,858	5.2%	4.7%	85.0%
27 Jul	4,465	7,202	11,667	375,525	2.6%	2.8%	87.8%
28 Jul	7,210	8,320	15,530	391,055	4.2%	3.3%	91.4%
29 Jul	6,196	8,906	15,102	406,157	3.6%	3.5%	94.9%
30 Jul	4,666	7,086	11,752	417,909	2.7%	2.8%	97.7%
31 Jul	4,934	5,068	10,002	427,911	2.9%	2.0%	100.0%
Season Totals	172,228	255,683	427,911		40.2%	59.8%	

Note: The large box indicates the central 50% of the run (second and third quartiles). Historic median passage date is 12 July.

Table 2.—Age and sex composition of chum salmon for 4 sampling strata, Aniak River sonar, 2008.

Date (Strata)	Sample Size	Sex	Age										
			0.2		0.3		0.4		0.5		Total		
			Number Fish	%	Number Fish	%	Number Fish	%	Number Fish	%	Number Fish	%	
2008													
7/8,10,14 (6/26- 7/15)	149	M	0	0.0	10,001	43.5	58,005	50.0	1,000	10.0	69,006	46.3	
		F	0	0.0	13,001	56.5	58,004	50.0	9,001	90.0	80,006	53.7	
		Subtotal	0	0.0	23,002	15.4	116,009	77.9	10,001	6.7	149,012	100.0	
7/16,19,22,23 (7/16-24)	164	M	0	0.0	21,488	46.8	54,697	49.6	2,930	75.0	79,115	49.4	
		F	0	0.0	24,418	53.2	55,674	50.4	977	25.0	81,069	50.6	
		Subtotal	0	0.0	45,906	28.7	110,371	68.9	3,907	2.4	160,184	100.0	
7/27,28 (7/25-31)	171	M	0	0.0	29,158	50.0	24,993	45.0	2,777	57.1	56,928	48.0	
		F	0	0.0	29,158	50.0	30,546	55.0	2,083	42.9	61,787	52.0	
		Subtotal	0	0.0	58,316	49.1	55,539	46.8	4,860	4.1	118,715	100.0	
Season	484	M	0	0.0	60,647	47.7	137,694	48.8	6,707	35.7	205,048	47.9	
		F	0	0.0	66,577	52.3	144,225	51.2	12,060	64.3	222,863	52.1	
		Total	0	0.0	127,224	29.7	281,919	65.9	18,767	4.4	427,911	100.0	

Note: Number of fish per strata and age class is based on the sonar estimate per strata multiplied by percent of fish in an age class and stratum.


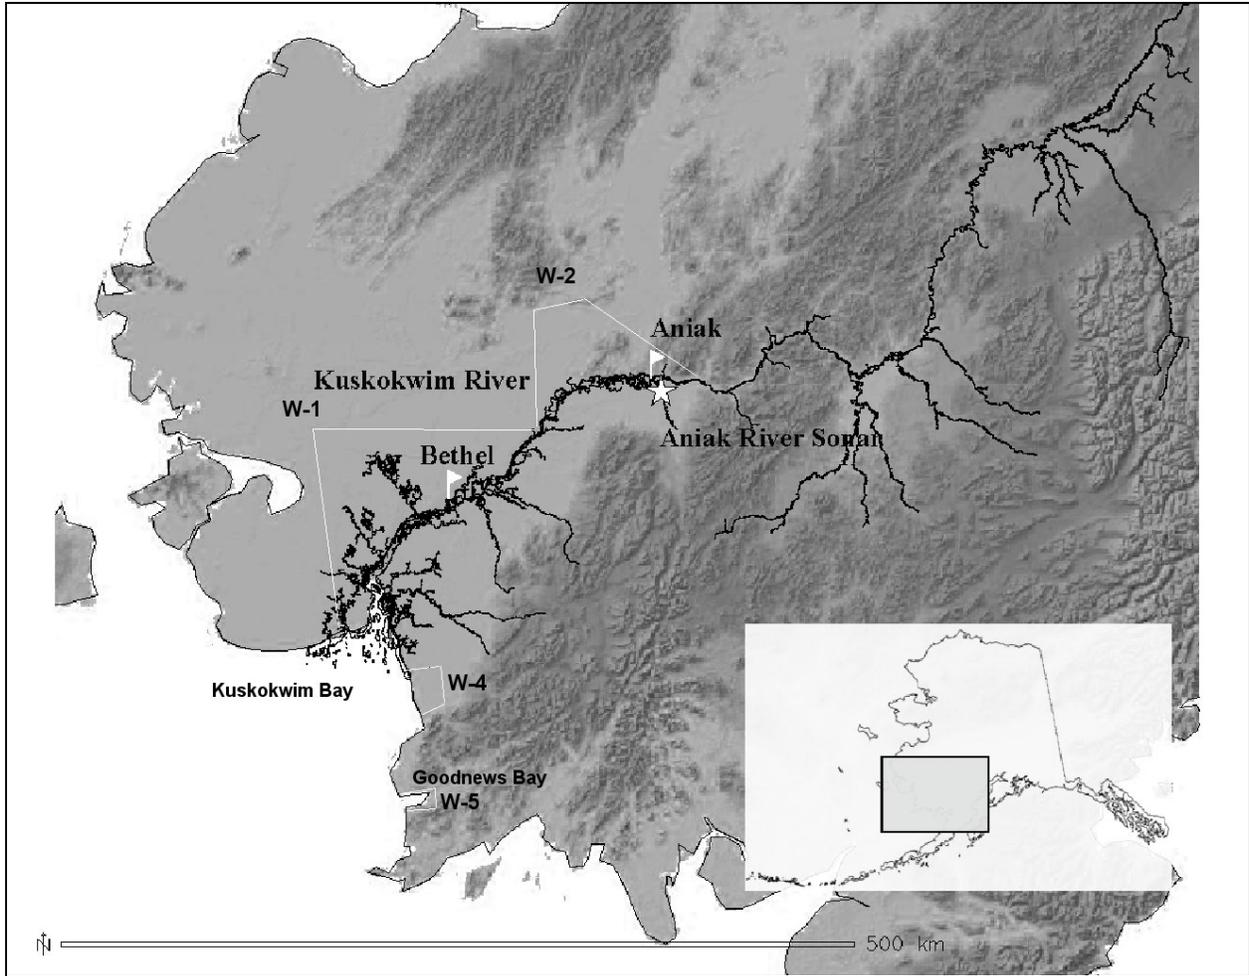


Figure 1.—Kuskokwim River Area, with lower river fishing districts (W-1, W-2, W-4, W-5) delineated.

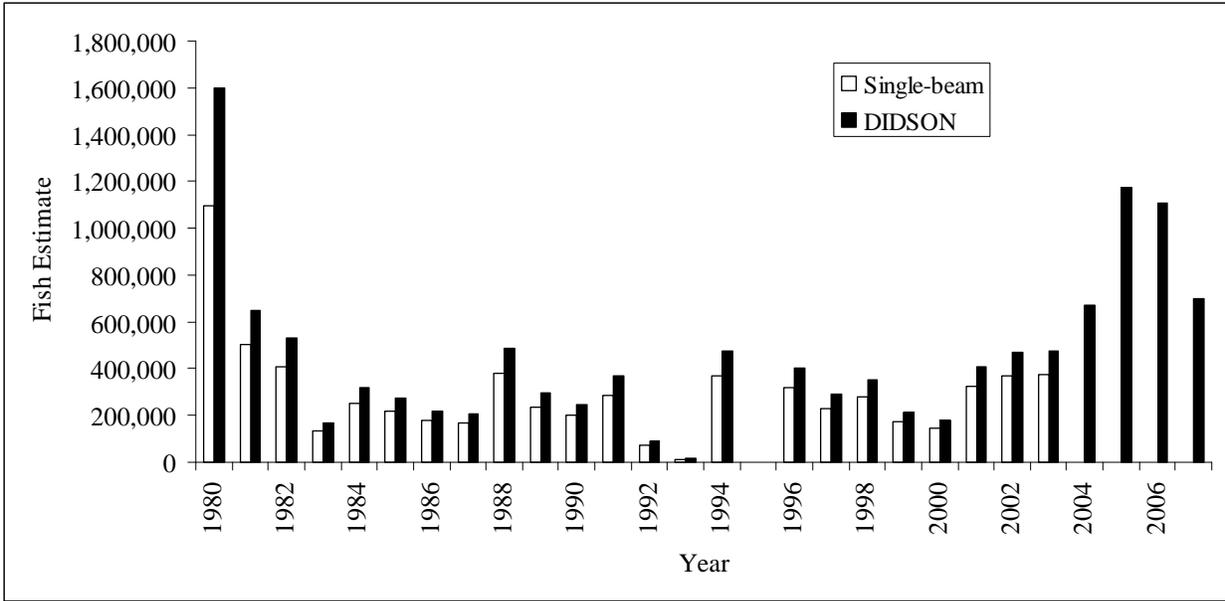

*Note:* From 1980 to 1994 Bendix sonar was used, from 1996 to 2003 BioSonics sonar was used. Bendix and BioSonics sonar counts from 1980 to 1994 and 1996 to 2003 were adjusted to DIDSON equivalent. No data 1995.

Figure 2.—Historical sonar passage from 1980 to 2007 Aniak River sonar.



Figure 3.–Location of Aniak River sonar site, 2008.

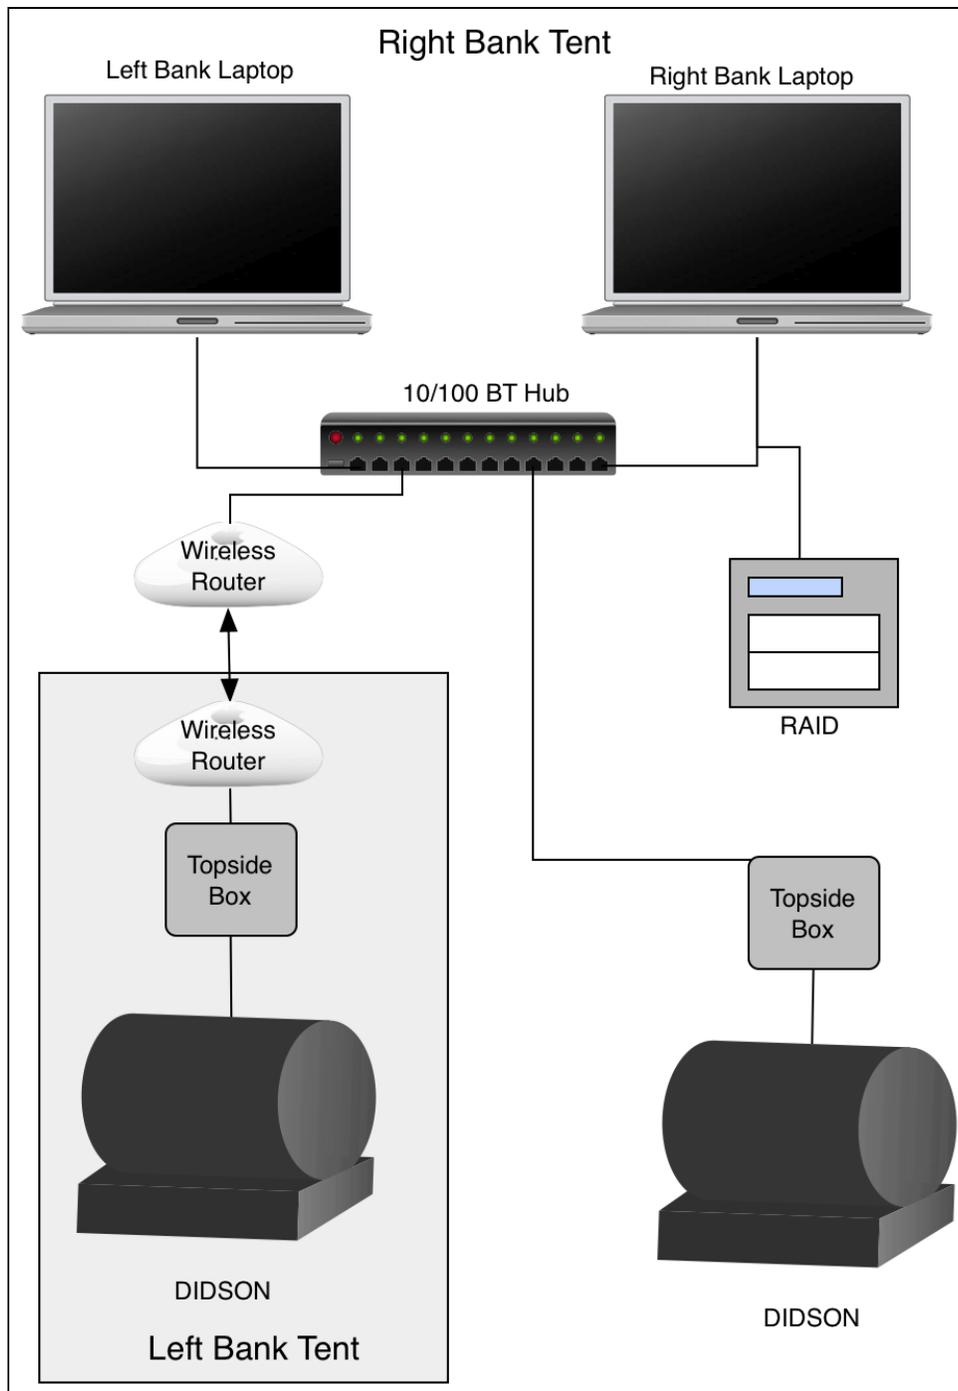


Figure 4.–DIDSON sonar equipment schematic, Aniak River sonar, 2008.


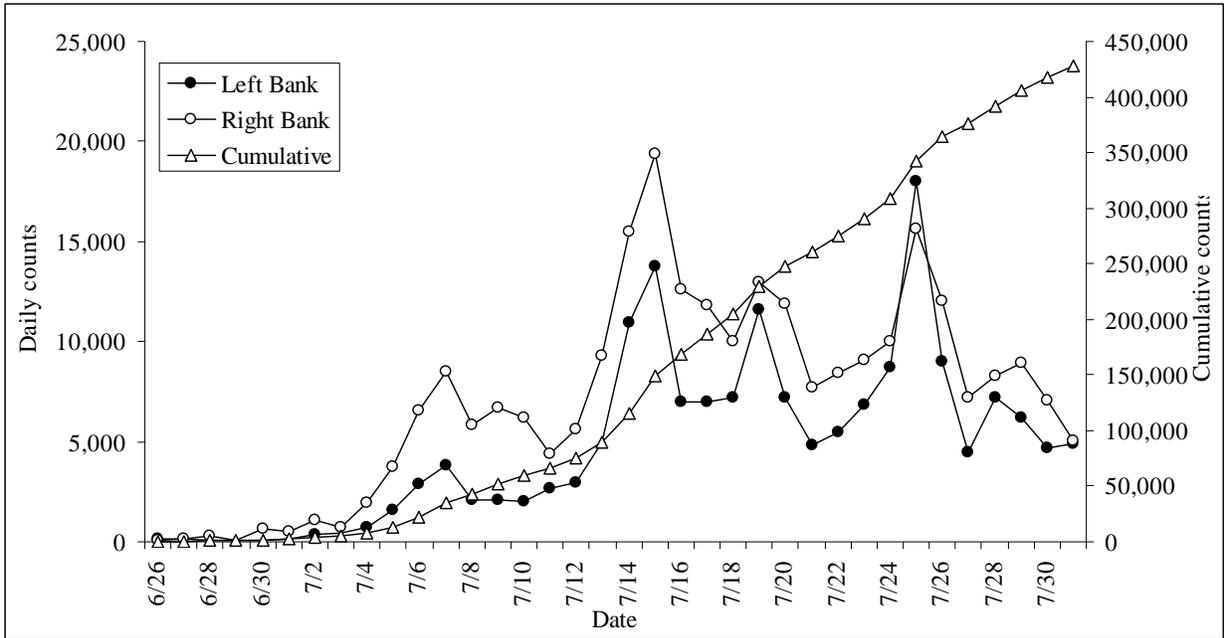


Figure 5.—Daily passage estimates on left bank, right bank and cumulative passage estimates at Aniak River sonar, 2008.

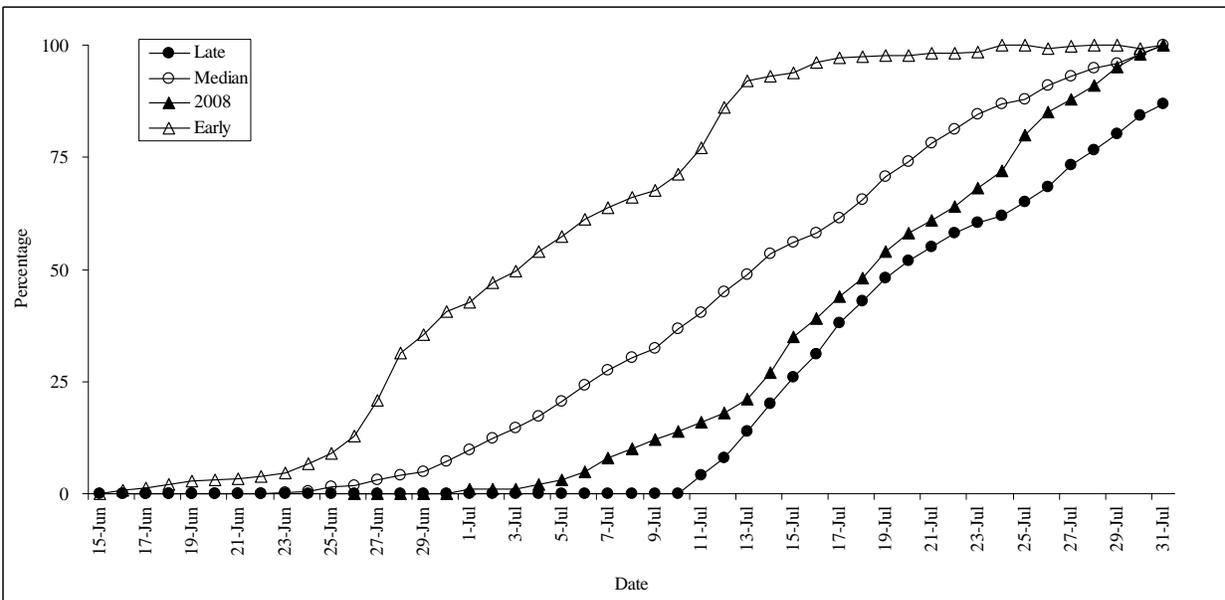

Note: Early, late, and median values were derived from the maximum, minimum and median cumulative percentages across all years, respectively.

Figure 6.—Historical run timing 1980–2007, Aniak River sonar.

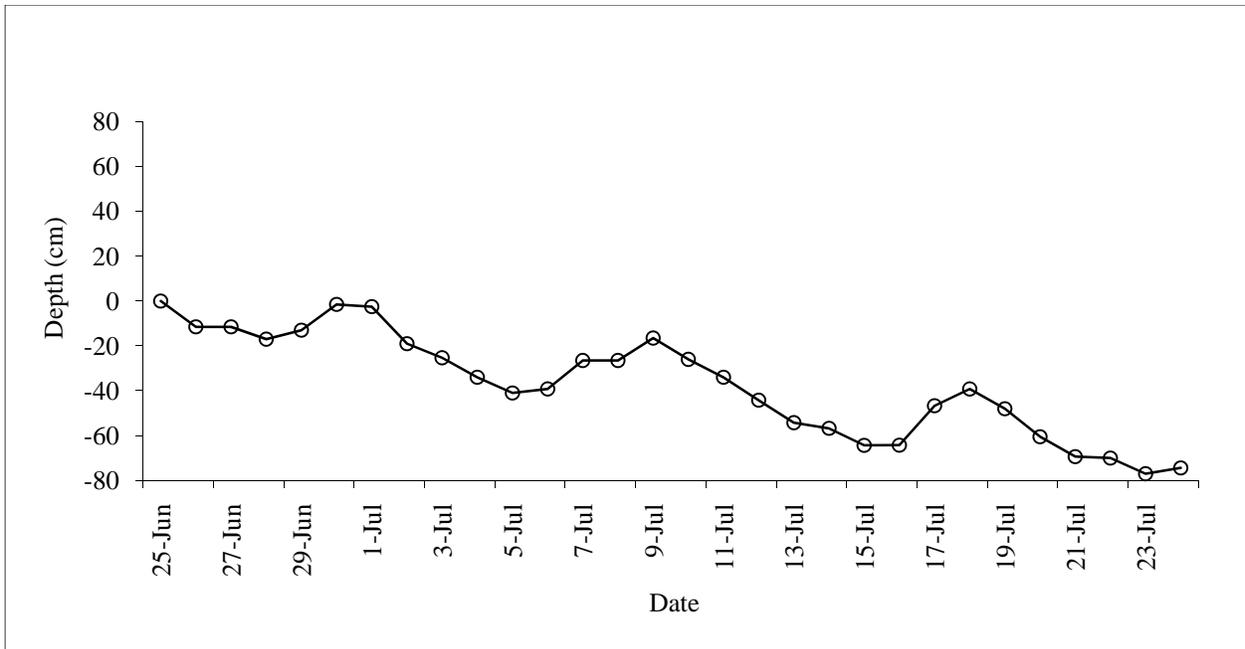


Figure 7.—Water level Aniak River sonar, 2008.

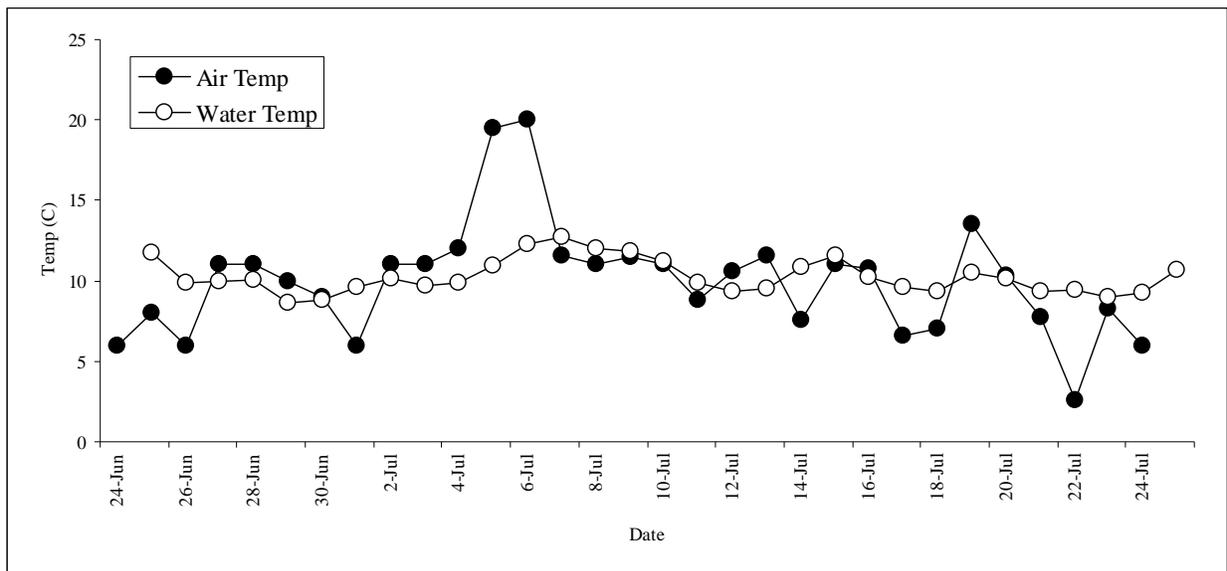


Figure 8.—Air and water temperatures, Aniak River sonar, 2008.

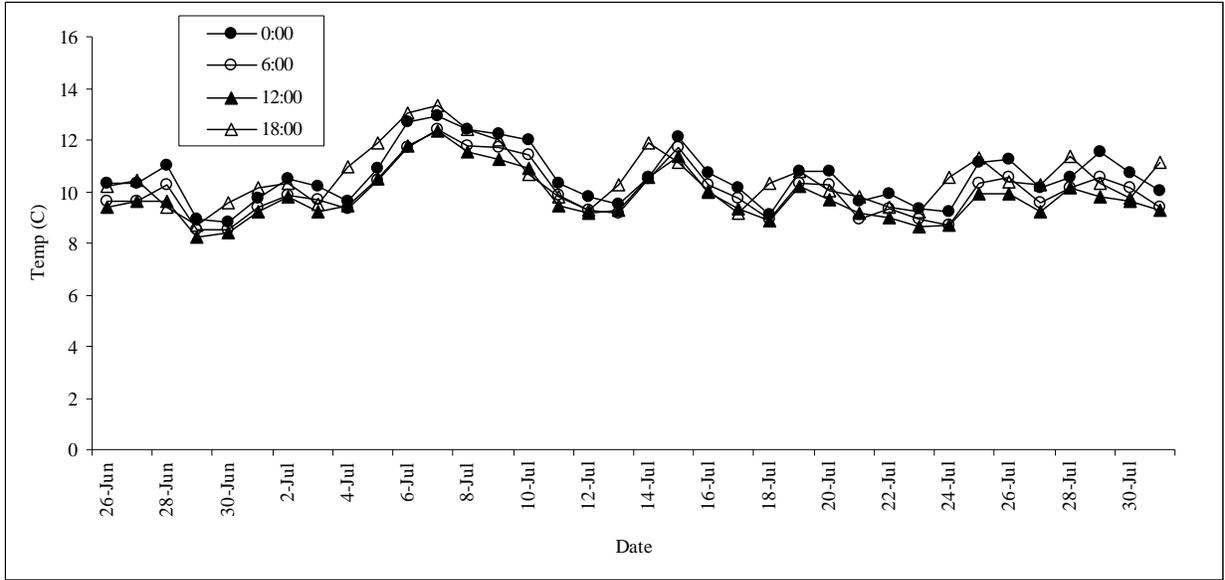


Figure 9.–Daily water temperature by time, Aniak River sonar, 2008

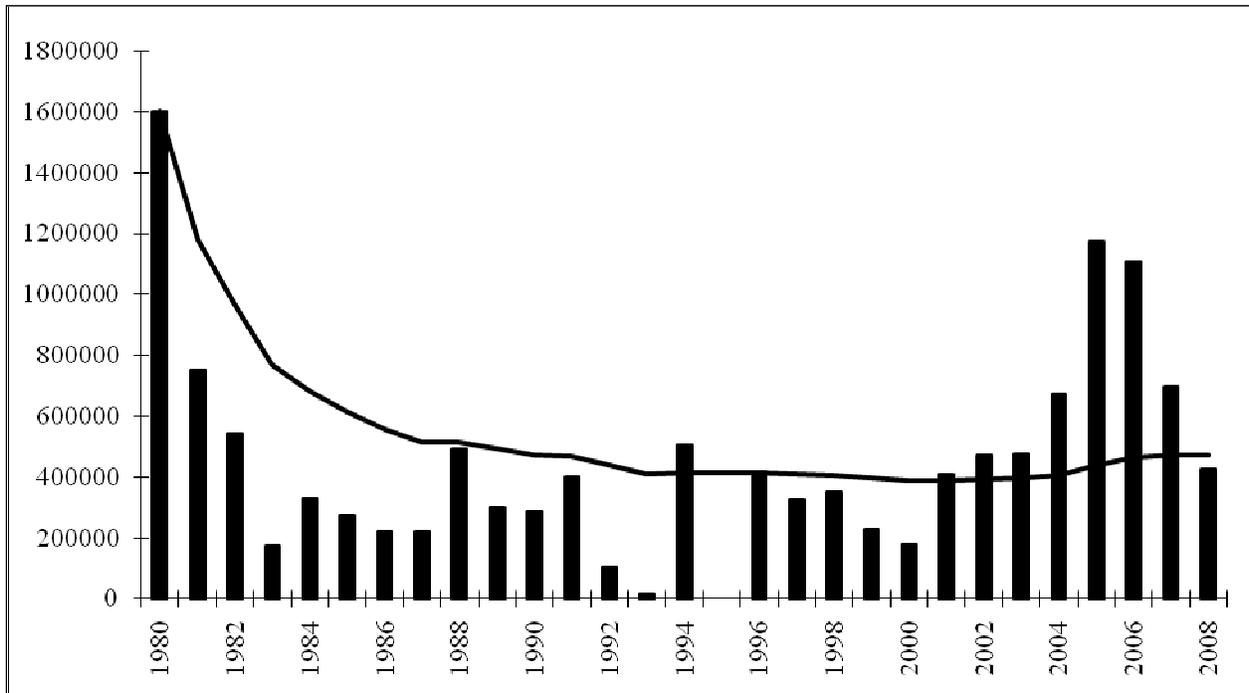


Figure 10.–Corrected historical passage with running average at the Aniak River sonar project, 1980 to 2008.

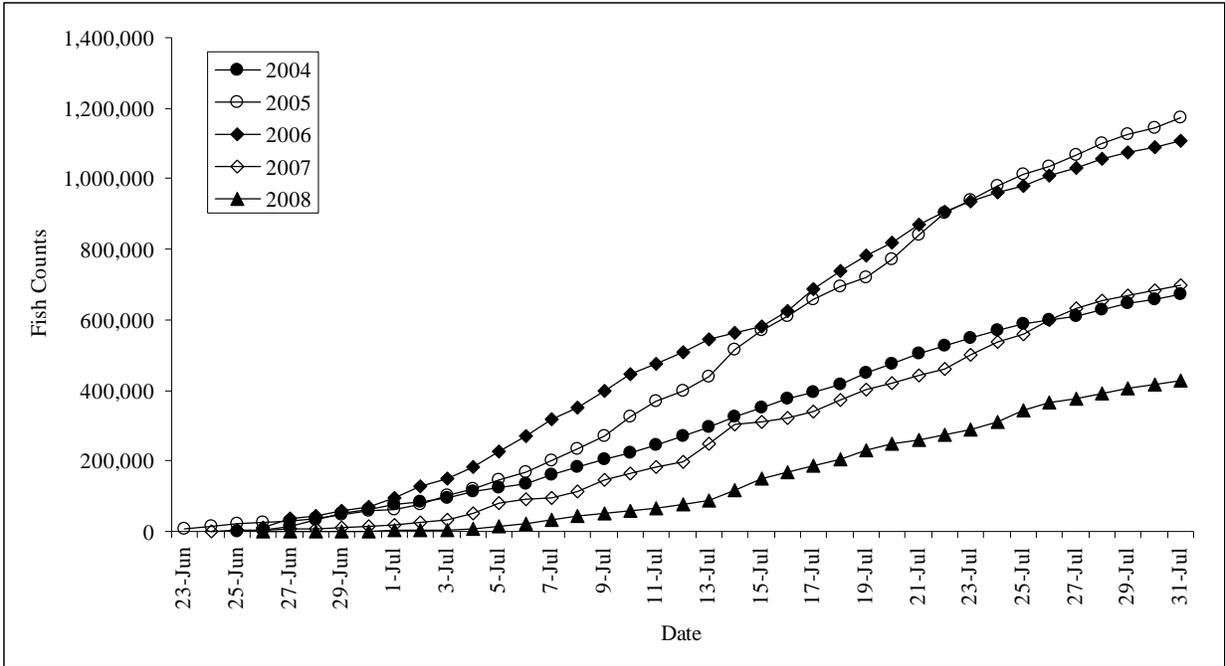


Figure 11.—Cumulative fish passage estimates, Aniak River sonar, 2004 to 2008.



## **APPENDIX A. PROJECT HISTORY**

Appendix A1.–Timetable of developmental changes of the Aniak River sonar project, 1980–2008.

Year	Event
1980	<ul style="list-style-type: none"> <li>• Aniak River sonar project established</li> <li>• 1978 model, non-configurable Bendix sonar counter used with 60 ft. artificial substrate</li> <li>• Single bank operation (1980–1995)</li> <li>• Cumulative adjusted daily sonar estimates expanded by 150% to account for salmon passing outside the ensonified area</li> <li>• Sonar estimates are extrapolated for pre- and post-season salmon escapement (1980–1982, 1985–1989, and 1991–1996)</li> <li>• Gillnet test fishing to provide species apportionment and ASL information</li> <li>• Three correction factor calibrations per day averaged to adjust daily estimates</li> </ul>
1981	<ul style="list-style-type: none"> <li>• 1981 model, non-configurable Bendix sonar counter used with 60 ft artificial substrate</li> <li>• A tentative escapement goal of 250,000 chum and 25,000 Chinook salmon is established for the Aniak River</li> <li>• Gillnet and beach seine test fishing to provide species apportionment and ASL information</li> </ul>
1982	<ul style="list-style-type: none"> <li>• Sonar equipment unchanged</li> <li>• Escapement goals for AYK Region updated; 250,000 chum and 25,000 Chinook salmon escapement goal is established for the Aniak River</li> <li>• Gillnet test fishing to provide species apportionment and ASL information</li> <li>• Four correction factor calibrations applied to 6 hour time periods to adjust daily estimates</li> </ul>
1983	<ul style="list-style-type: none"> <li>• Sonar equipment unchanged</li> <li>• Review of escapement goal based upon sonar estimates indicated 1980–1981 Aniak River</li> <li>• Sonar estimates likely represented unusual record escapements, and much smaller escapements would probably provide adequate future spawning stocks as well as catches for user groups</li> <li>• Goal remains 250,000 chum and 25,000 Chinook salmon</li> <li>• Sonar estimates are not extrapolated for pre-season and post-season salmon escapement (1983–1984, 1990, 1996–1997)</li> </ul>
1984	<ul style="list-style-type: none"> <li>• Sonar equipment unchanged</li> <li>• No apportionment of estimates made due to insufficient test gillnets catches</li> <li>• In the absence of sufficient species apportionment data, the sonar based escapement objective would be 250,000 estimated salmon counts</li> <li>• Cumulative adjusted daily sonar estimates expanded by 162% to account for salmon passing outside the ensonified area</li> </ul>
1985	<ul style="list-style-type: none"> <li>• Sonar equipment unchanged</li> <li>• Gillnet test fishing and carcass samples provide ASL information</li> </ul>
1986	<ul style="list-style-type: none"> <li>• Sonar equipment unchanged</li> <li>• ASL sampling activities are discontinued to decrease operating costs</li> <li>• Species apportionment activities are discontinued due to inadequate sample sizes</li> </ul>

-continued-

Year	Event
1988	<ul style="list-style-type: none"> <li>• Sonar operations eliminated use of the 60 ft artificial substrate</li> <li>• Sampling range unknown</li> </ul>
1989	<ul style="list-style-type: none"> <li>• Sonar operations same as 1988</li> </ul>
1990	<ul style="list-style-type: none"> <li>• No formal project documentation (1990–1995)</li> </ul>
1993	<ul style="list-style-type: none"> <li>• Fire destroys 1981 model Bendix sonar counter</li> <li>• Replaced with a 1978 model Bendix sonar counter</li> <li>• Historic data in Kuskokwim Area Management Report is adjusted to reflect 162% expansion factor applied to 1980–1983 season estimates</li> </ul>
1994	<ul style="list-style-type: none"> <li>• Sonar operations continue with 1978 model counter</li> </ul>
1995	<ul style="list-style-type: none"> <li>• Sonar operations continue with 1978 model counter</li> <li>• Reliable escapement estimates are not generated</li> </ul>
1996	<ul style="list-style-type: none"> <li>• Established a new sonar data collection site 1.5 km downstream from the historical site</li> <li>• Project operations redesigned to provide full river ensonification with user-configurable sonar equipment 24 hours per day on both banks</li> <li>• Periodic net sampling to monitor broad changes in species composition, corroborate acoustically detected abundance trends, and obtain ASL samples of chum salmon</li> <li>• Sonar estimates are not extrapolated for preseason and postseason salmon escapement (1996–1997)</li> <li>• Regional Information Report documents project operations and data collection activities</li> </ul>
1997– 2000	<ul style="list-style-type: none"> <li>• Project operations remain the same as 1996 for years 1997 through 2000</li> </ul>
2001	<ul style="list-style-type: none"> <li>• Sonar operations remain the same as 1996 for years 1997 through 2001</li> <li>• Species Apportionment Program is added to the project, which involved test fishing twice daily and expanding the crew size</li> </ul>
2002	<ul style="list-style-type: none"> <li>• Sonar operations remain the same as years 1996–2001</li> <li>• Species apportionment program operates for last season with similar methodology to 2001.</li> </ul>
2003	<ul style="list-style-type: none"> <li>• Sampled three 4-hour periods on each bank instead of operating 24-hours/day.</li> <li>• Species apportionment discontinued</li> <li>• DIDSON sonar was tested at the site in preparation to migrate from BioSonics to DIDSON</li> <li>• Escapement goal updated: SEG to provide a range of 210,000 – 370,000 fish</li> </ul>
2004– 2006	<ul style="list-style-type: none"> <li>• Operated DIDSON exclusively on both banks</li> </ul>

-continued-

---

Year	Event
2007	<ul style="list-style-type: none"><li data-bbox="318 275 889 302">• Operated DIDSON exclusively on both banks</li><li data-bbox="318 310 1256 342">• Escapement goal updated: SEG revised to a range of 220,000 to 480,000 fish</li></ul>
2008	<ul style="list-style-type: none"><li data-bbox="318 390 846 422">• Sonar operations remain the same as 2007</li></ul>

---