

YUKON RIVER SONAR ESCAPEMENT ESTIMATE

1986

by

David C. Mesiar  
and  
Todd R. LaFlamme

Regional Information Report<sup>1</sup> No. 3A91-03

Alaska Department of Fish and Game  
Division of Commercial Fisheries  
Chief Fisheries Scientist's Office  
Sonar and Technical Services  
333 Raspberry Road  
Anchorage, Alaska 99518

February 1991

---

<sup>1</sup> The Regional Information Report series was established in 1987 to provide an information access system for all unpublished divisional reports. These reports frequently serve diverse ad hoc informational purposes or archive basic uninterpreted data. To accommodate timely reporting of recently collected information, reports in this series undergo only limited internal review and may contain preliminary data; this information may be subsequently finalized and published in the formal literature. Consequently, these reports should not be cited without prior approval of the author or the Division of Commercial Fisheries.



## TABLE OF CONTENTS

LIST OF FIGURES . . . . .	iv
LIST OF TABLES . . . . .	v
LIST OF APPENDICES . . . . .	vi
ABSTRACT . . . . .	xi
INTRODUCTION . . . . .	1
Study Area Description . . . . .	2
METHODS . . . . .	2
<i>Hydroacoustic Counting</i> . . . . .	2
Sampling Design . . . . .	2
Equipment and Procedures . . . . .	3
Analytical Methods . . . . .	4
Spatial Expansion . . . . .	5
Temporal Expansion . . . . .	6
Estimation of Missing Data . . . . .	6
<i>Species Allocation</i> . . . . .	7
Sampling Design . . . . .	7
Equipment and Procedures . . . . .	7
Analytical Methods . . . . .	8
Estimation of Relative Abundance . . . . .	8
Migratory Run Timing . . . . .	8
RESULTS . . . . .	8
<i>Hydroacoustic Counting</i> . . . . .	8
Estimation of Total Daily Passage . . . . .	8
Estimation of Missing Data . . . . .	9
<i>Species Allocation</i> . . . . .	9
Estimation of Species Proportions . . . . .	9
Estimation of Daily Passage . . . . .	10
DISCUSSION . . . . .	12
<i>Hydroacoustic Counting</i> . . . . .	12
Estimation of Total Daily Fish Passage . . . . .	12
<i>Species Allocation</i> . . . . .	13
Estimation of Species Proportions . . . . .	13
Estimation of Daily Passage . . . . .	13
LITERATURE CITED . . . . .	14

## LIST OF FIGURES

<u>Figure</u>	<u>Page</u>
1. Map of the lower Yukon River showing the two sites used for hydroacoustic escapement enumeration in 1986. . . . .	15
2. Areas of the Yukon River cross section sampled hydroacoustically at km 197 in 1986. . . . .	16
3. Geometric representation of Yukon River and hydroacoustic beam cross sectional areas used for calculation of spatial expansion factors for counts of fish obtained hydroacoustically, Yukon Sonar, 1986. . . . .	17
4. Daily fish passage estimates for combined banks, left bank, and right bank at km 197, Yukon River, 1986 . . . . .	18
5. Species proportions between 09 June and 12 September at km 197, Yukon River, 1986 . . . . .	19
6. Daily fish passage estimates for chinook salmon, summer and fall chum salmon, and coho salmon at km 197, Yukon River, 1986. . . . .	20
7. Daily fish passage estimates for pink salmon and non-salmon species at km 197, Yukon River, 1986.	21

## LIST OF TABLES

<u>Table</u>	<u>Page</u>
1. Estimated escapements of chinook, summer chum, fall chum, coho, and pink salmon, and non-salmon species past km 197, Yukon River, 1986 . . . . .	22
2. Species allocation time periods and species proportions for left and right bank Yukon River sonar escapement estimates, 1986 . . . . .	23
3. Run timing parameters, based on hydroacoustic escapement estimates of chinook, summer chum, fall chum, coho, and pink salmon, and other (pooled) species at river km 197, Yukon sonar, 1986 . . . . .	24

## LIST OF APPENDICES<sup>a</sup>

<u>Appendix</u>	<u>Page</u>
Appendix 1. Criteria for classification of targets .	1
Appendix Tables:	
1. Daily sonar counts of chinook, summer chum, fall chum, coho, and pink salmon, and non-salmon species, for both banks combined, Yukon River sonar, 1986. . . . .	2
2. Daily sonar counts of chinook, summer chum, fall chum, coho, and pink salmon, and non-salmon species, for the right bank, Yukon River sonar, 1986 . . . . .	5
3. Daily sonar counts of chinook, summer chum, fall chum, coho, and pink salmon, and non-salmon species, for the left bank, Yukon River sonar, 1986 . . . . .	8
4. Gill net catches of chinook salmon adjusted to reflect equal effort and the natural log of the catches, Yukon River sonar, 1986 . . . . .	11
5. Simple linear regression worksheet with chinook salmon length class midpoint and the natural log of the ratio of catches, Yukon River sonar, 1986	12
6. Selectivity coefficients and adjusted catches for chinook salmon intercepted in 7.5 inch gill nets, Yukon River sonar, 1986. . . . .	13
7. Selectivity coefficients and adjusted catches for chinook salmon intercepted in 8.5 inch gill nets, Yukon River sonar, 1986. . . . .	14
8. Gill net catches of summer chum salmon adjusted to reflect equal effort and the natural log of the catches, Yukon River sonar, 1986 . . . . .	15
9. Simple linear regression worksheet with summer chum salmon length class midpoint and the natural log of the ratio of catches, Yukon River sonar, 1986. . . . .	16

<sup>a</sup> Appendices to this report are available in a separate document (RIR 3A91-04)

10.	Selectivity coefficients and adjusted catches for summer chum salmon intercepted in 5.5 inch gill nets, Yukon River sonar, 1986 . . . . .	17
11.	Selectivity coefficients and adjusted catches for summer chum salmon intercepted in 6.5 inch gill nets, Yukon River sonar, 1986 . . . . .	18
12.	Gill net catches of fall chum salmon adjusted to reflect equal effort and the natural log of the catches, Yukon River sonar, 1986 . . . . .	19
13.	Simple linear regression worksheet with fall chum salmon length class midpoint and the natural log of the ratio of catches, Yukon River sonar, 1986. . . . .	20
14.	Selectivity coefficients and adjusted catches for fall chum salmon intercepted in 5.5 inch gill nets, Yukon River sonar, 1986 . . . . .	21
15.	Selectivity coefficients and adjusted catches for fall chum salmon intercepted in 6.5 inch gill nets, Yukon River sonar, 1986 . . . . .	22
16.	Gill net catches of coho salmon adjusted to reflect equal effort and the natural log of the catches, Yukon River sonar, 1986 . . . . .	23
17.	Simple linear regression worksheet with coho salmon length class midpoint and the natural log of the ratio of catches, Yukon River sonar, 1986	24
18.	Selectivity coefficients and adjusted catches for coho salmon intercepted in 5.5 inch gill nets, Yukon River sonar, 1986. . . . .	25
19.	Selectivity coefficients and adjusted catches for coho salmon intercepted in 6.5 inch gill nets, Yukon River sonar, 1986. . . . .	26
20.	Gill net catches of pink salmon adjusted to reflect equal effort and the natural log of the catches, Yukon River sonar, 1986 . . . . .	27
21.	Simple linear regression worksheet with pink salmon length class midpoint and the natural log of the ratio of catches, Yukon River sonar, 1986. . . . .	28

22.	Selectivity coefficients and adjusted catches for pink salmon intercepted in 4.0 inch gill nets, Yukon River sonar, 1986. . . . .	29
23.	Selectivity coefficients and adjusted catches for pink salmon intercepted in 5.0 inch gill nets, Yukon River sonar, 1986. . . . .	30
24.	Gill net catches of non-salmon species adjusted to reflect equal effort and the natural log of the catches, Yukon River sonar, 1986. . . . .	31
25.	Simple linear regression worksheet with non-salmon length class midpoint and the natural log of the ratio of catches, Yukon River sonar, 1986. . . . .	32
26.	Selectivity coefficients and adjusted catches for non-salmon species intercepted in 4.0 inch gill nets, Yukon River sonar, 1986 . . . . .	33
27.	Selectivity coefficients and adjusted catches for non-salmon species intercepted in 5.0 inch gill nets, Yukon River sonar, 1986 . . . . .	34
28.	Net upstream sonar counts, expansion factors, and expanded counts in bottom and surface strata on the right bank of the Yukon River between 09 June, and 12 September, 1986 . . . . .	35
29.	Net upstream sonar counts, expansion factors, and expanded counts in nearshore and offshore strata on the left bank of the Yukon River between 09 June, and 12 September, 1986. . . . .	68
30.	Species composition estimates with unadjusted and adjusted catches used for apportionment of sonar counts by day on the right bank of the Yukon River between 10 June and 12 September, 1986 . . . . .	118
31.	Species composition estimates with unadjusted and adjusted catches used for apportionment of sonar counts by day on the left bank of the Yukon River between 10 June and 12 September, 1986 . . . . .	143

Appendix Figures:	<u>Page</u>
1. Gill net selectivity curves for chinook salmon intercepted in 7.5 and 8.5 inch mesh, Yukon River sonar, 1986. . . . .	168
2. Length frequencies of chinook salmon intercepted in 7.5 inch gill nets, unadjusted and adjusted for selectivity, Yukon River sonar, 1986 . . . .	169
3. Length frequencies of chinook salmon intercepted in 8.5 inch gill nets, unadjusted and adjusted for selectivity, Yukon River sonar, 1986 . . . .	170
4. Gill net selectivity curves for summer chum salmon intercepted in 5.5 and 6.5 inch mesh, Yukon River sonar, 1986. . . . .	171
5. Length frequencies of summer chum salmon intercepted in 5.5 inch gill nets, unadjusted and adjusted for selectivity, Yukon River sonar, 1986 . . . . .	172
6. Length frequencies of summer chum salmon intercepted in 6.5 inch gill nets, unadjusted and adjusted for selectivity, Yukon River sonar, 1986 . . . . .	173
7. Gill net selectivity curves for fall chum salmon intercepted in 5.5 and 6.5 inch mesh, Yukon River sonar, 1986. . . . .	174
8. Length frequencies of fall chum salmon intercepted in 5.5 inch gill nets, unadjusted and adjusted for selectivity, Yukon River sonar, 1986 . . . . .	175
9. Length frequencies of fall chum salmon intercepted in 6.5 inch gill nets, unadjusted and adjusted for selectivity, Yukon River sonar, 1986 . . . . .	176
10. Gill net selectivity curves for coho salmon intercepted in 5.5 and 6.5 inch mesh, Yukon River sonar, 1986. . . . .	177
11. Length frequencies of coho salmon intercepted in 5.5 inch gill nets, unadjusted and adjusted for selectivity, Yukon River sonar, 1986 . . . . .	178

12.	Length frequencies of coho salmon intercepted in 6.5 inch gill nets, unadjusted and adjusted for selectivity, Yukon River sonar, 1986 . . . . .	179
13.	Gill net selectivity curves for pink salmon intercepted in 4.0 and 5.0 inch mesh, Yukon River sonar, 1986. . . . .	180
14.	Length frequencies of pink salmon intercepted in 4.0 inch gill nets, unadjusted and adjusted for selectivity, Yukon River sonar, 1986 . . . . .	181
15.	Length frequencies of pink salmon intercepted in 5.0 inch gill nets, unadjusted and adjusted for selectivity, Yukon River sonar, 1986 . . . . .	182
16.	Gill net selectivity curves for non-salmon intercepted in 4.0 and 5.0 inch mesh, Yukon River sonar, 1986 . . . . .	183
17.	Length frequencies of non-salmon intercepted in 4.0 inch gill nets, unadjusted and adjusted for selectivity, Yukon River sonar, 1986. . . . .	184
18.	Length frequencies of non-salmon intercepted in 5.0 inch gill nets, unadjusted and adjusted for selectivity, Yukon River sonar, 1986. . . . .	185

## ABSTRACT

The Yukon River sonar project was designed to provide estimates of daily escapement past lower-river commercial and subsistence fisheries for chinook, summer and fall chum, and coho salmon. The sampling site, located at river km 197, has been used for this purpose since 1985. Fish passage was estimated through temporal and spatial expansion of fish counts obtained through hydroacoustic gear deployed on both banks of the river between 9 June and 12 September 1986. A gill net test fishery sampled the migrant fish population to provide information on which to base apportionment of sonar counts to species. Six gill nets ranging from 101.6 mm (4.0 inch) to 215.9 mm (8.5 inch) stretched mesh were used to capture fish. Catches were adjusted for gill net selectivity and effort, and were used to estimate species proportions. A total of 4,309,220 fish passed the sampling site; 76 percent traveled along the left bank while 24 percent traveled along the right bank. The program estimated passage of 89,733 chinook salmon, 2,027,860 summer chum salmon, 708,379 fall chum salmon, 246,397 coho salmon, and 1,017,396 pink salmon during the time period sampled. Peak passage occurred on 21 June, 20 June, 10 August, 29 August, and 09 July for chinook, summer chum, fall chum, coho, and pink salmon.

KEY WORDS: salmon, hydroacoustic, Yukon River, species apportionment, escapement

## INTRODUCTION

Yukon River salmon stocks are harvested for both commercial and subsistence use. Although the most intense fishery occurs within 240 km of the river mouth, salmon stocks are exploited over more than 1,600 km of river in Alaska and Canada. Management of the fisheries resource requires timely knowledge of run strength and escapement levels. Such information, however, is difficult to obtain in the Yukon River due to its large size, multiple channels, and highly turbid water. Fishery managers therefore base their decisions on information obtained from several sources, each of which has unique strengths and weaknesses.

Visual surveys of distant clear-water spawning tributaries provide stock specific indices of escapement. These indices, however, are highly dependent upon survey timing and spawner stream life, may not be representative of system escapement levels, and are not available for in-season management use. Similarly, sonar estimates of salmon escapement in spawning tributaries are not timely enough to provide a basis for decision making, and only provide information for a single fish stock. Test fishery gill net indices obtained near the river mouth provide in-season information, but interpretation of this information is confounded by gill net selectivity, changes in net site characteristics, and inter-annual variability in fish migration paths through the three river mouth channels.

Estimation of fish passage in the mainstem Yukon River attempts to solve the problems associated with other abundance indexing and estimating methods. Location of the sonar sampling site at River km 197 limits the delay between the lowermost commercial fishery and the point of estimation to approximately three days migration time. Additionally, there is only one important spawning tributary (Andreafsky River) downstream from the sonar sampling site, making it possible to estimate the number of salmon returning to most of the Yukon River drainage.

The Yukon River sonar project in 1986 provided management with timely in-season run strength estimates for the first time. The 1986 field season focused on the following Pacific salmon species; chinook salmon (*Oncorhynchus tshawytscha*), chum salmon (*O. keta*), coho salmon (*O. kisutch*), and pink salmon (*O. gorbuscha*). Specific objectives of the project were as follows:

1. Estimate, by time period, the number of fish migrating past river km 197 through:
  - a. estimation of the number of fish passing river km 197 between 9 June and 12 September and,
  - b. estimation of the species composition of the fish using drift gill nets of several different mesh sizes.
2. Monitor migratory run timing of salmon.

## Study Area Description

The Yukon River flows approximately 2415 km from its source in the Canadian Yukon Territory to its mouth in Norton Sound along Alaska's northwest coast. The lower 193 km consists of an extensive delta area with multiple channels and unstable banks. Near the village of Pilot Station (river km 196) the river narrows to a single channel with relatively stable banks. At river km 197 the river is approximately 670 m wide and reaches a maximum depth of 27 m. The combination of physical conditions including a single channel, stable river banks, relatively narrow channel width, high water velocity, and proximity to lower river fisheries resulted in the choice of this location for deployment and operation of hydroacoustic equipment in 1983 (Mesiar et al., 1986), and continued use in 1986.

Two sites, one on the left bank and one on the right bank, were used in 1986 (Figure 1). The left bank bottom is comprised of silt and sand. Bottom contour and stability vary with hydrologic conditions; high flow rates cause dramatic changes in bottom profile over short periods of time. The right bank bottom is comprised of gravel and cobble and remains extremely stable throughout the season.

## METHODS

There are two fundamental components of fish passage estimation in locations of temporally mixed species. First is estimation of the total number of fish passing the sampling site. Second is determination of species composition of the fish.

### *Hydroacoustic Counting*

#### Sampling Design

The sampling design used in 1986 followed that used the previous year and documented by Mesiar et al. (1986). Experience at the sonar site has demonstrated that fish travel within 100 m of shore on the left bank and within 50 m of shore on the right bank (Nickerson and Gaudet 1985; Mesiar et al. 1986). Spatial stratification for hydroacoustic sampling was based on this knowledge as well as on knowledge of river bottom characteristics on each bank.

The left bank bottom varies within a season due to changing hydrologic conditions and silt/sand composition. As in the past, two strata, near-shore and off-shore, were ensonified due to offshore fish distribution and irregularities of the river bottom profile (Figure 2). The near-shore stratum encompassed the area from the shoreline to the

break in the slope, and the off-shore stratum continued from that point to a distance of 95 m for a total range of approximately 130 m. The shallow bottom gradient, transducer beam dimensions, and fish orientation to the river bottom eliminated the need for sampling separate bottom and surface strata.

The right bank is characterized by a fairly even, stable bottom with a steep gradient (Figure 2). The lack of large bottom irregularities allows deployment of one system with two transducers to ensnare the horizontal distance necessary for detection of all migrant fish. The steep gradient requires separation of the water column into two discrete strata. The bottom stratum grazes the river bottom from shore to 86 m range and conforms to the dimensions of the acoustic beam. The surface stratum includes the remaining portion of the water column.

Based on prior analysis of the coefficient of variation of fish counts in sample intervals of five to 60 minutes (incremented by five minute steps) (Nickerson and Gaudet, 1985) a sample interval of 20 minutes was used in 1986. Sampling frequency was determined by the level of precision and accuracy deemed acceptable by fishery managers. A total of 12 sample intervals for each of the four strata are required to estimate fish passage  $p_i$  with accuracy  $d=0.1$  and precision ( $\alpha$ ) of a one in ten chance of missing the interval  $p_i \pm d$ .

Initially, each strata on the right bank was sampled during alternate hours for a total of 12 twenty-minute samples per stratum per day. Each left bank stratum was sampled for 20 minutes per hour for a total of 24 samples per stratum per day. Budgetary constraints prompted reduction of sampling intensity beginning 18 July. Each right bank stratum was sampled hourly from 0000-0300, 0800-1000, 1500-1700, and 2000-0300 hours, for a total of 14 samples per stratum per day. Each left bank stratum was sampled four times during the two-hour periods between 0800-1000 and 1500-1700, and hourly during 0000-0300 and 2000-2300 hours totaling 16 samples per stratum per day.

### Equipment and Procedures

Similar hydroacoustic equipment complements were used on each bank of the river. A 420 KHz Biosonics transceiver and two  $4^\circ \times 15^\circ$  elliptical-beam transducers were used on the left bank. On the right bank, a 420 KHz Biosonics transceiver activated one  $4^\circ \times 15^\circ$  elliptical-beam transducer to alternately sample surface and bottom strata. The transceiver emitted eight pings  $\text{sec}^{-1}$  for both left and right bank strata. The pulse width on both left and right banks was 0.4 ms.

Transducers were attached to a tripod-mounted pan and tilt unit which allowed remote aiming, or to a stationary, manually positioned tripod used in shallow water conditions. All transducers were aimed approximately 15 degrees downstream to facilitate determination of target direction using change-in-range techniques (Appendix 1). Both

sites included in-shore weirs downstream of the nearshore transducers. These were designed to deflect nearshore migrants through the acoustic beam. The right bank site also included a boom log positioned above the transducer to deflect debris.

Detected targets having voltage levels higher than a pre-set threshold level, (based on the smallest sized fish to be detected), were displayed on EPC model 3200 chart recorders. Targets appeared as dark traces within any of ten range intervals on the chart recording paper. Technicians initiated sampling sequences and monitored chart recorder output.

Optimal positioning of transducers as well as spatial expansion of hydroacoustic data requires knowledge of river bottom contours. River bottom profiles (depth at distance from a reference stake) were obtained each day on the left bank, and once per week on the right bank. Both formal and informal bottom profiles were measured. Formal profiles, used for spatial expansion, were measured for each change of transducer position. One end of a 100 m fiberglass tape was held at the reference stake while the other end was carried out into the river in a boat. At three m range intervals a mark was made on a Lowrance X15 recording fathometer. The resultant depth/distance points comprised the bottom profile used for spatial expansion. Since spatial expansion of the data is dependant upon river cross sectional area, which varies with water depth, a reference depth was measured when the season's first bottom profiles were obtained, and water depth relative to that reference was measured and recorded each day.

Informal bottom profiles were also recorded with a Lowrance X15 fathometer, but distance from shore was not accurately measured as the recordings served only to give an impression of river bottom slope and irregularity for optimal transducer placement. A series of up to eight left bank bottom profiles obtained at 25 m intervals along a 200 m section of shoreline was evaluated periodically to determine location of the bottom conditions most conducive to detection of fish with sonar. If the site in use at the time of bottom profile evaluation was not the most favorable, transducer repositioning to the best location was scheduled and completed within eight hours. Transducer movement at a particular site, which coincided with change in water level, was measured relative to the reference stake used for bottom profile measurement.

### **Analytical Methods**

Technicians monitored chart recorder output during each 20 minute sample interval, classifying and counting detected targets in each of the five range intervals (sectors) in a stratum. Targets were categorized as one of the following: 1) upstream directed and assumed to be fish (u); 2) downstream directed and assumed to be debris (d); or 3) direction unknown (z). The number of upstream targets in each sector and sample interval was increased by a proportion of the targets of

unknown direction resulting in the net number of upstream directed targets (n). The increase was determined from the ratio of upstream targets to all targets of known direction (u+d), or:

$$n_{i,j} = u_{i,j} + \left[ \frac{u_{i,j}}{u_{i,j} + d_{i,j}} (z_{i,j}) \right]$$

Each day the net number of upstream-directed targets in each beam sector and stratum was expanded to portions of day and areas of the beam not counted. Methods of spatial and temporal expansion are detailed in the following two sections.

**Spatial Expansion.** Total ensonification of the water column was not possible on the right bank. To expand net upstream fish counts for areas of the water column not sampled, beam characteristics and water cross-sectional area were quantified. For each range sector (i) of the beam in stratum k, area expansion factors were expressed as the ratio of water cross-sectional area to beam cross-sectional area. Area in each sector of the beam was calculated as  $a_{i,k}$ :

$$a_{i,k} = \left[ \left( (0.5) (r_{i,k}^2) \right) \frac{b\pi}{180} \right] - \left[ \left( (0.5) (r_{i-1,k}^2) \right) \frac{b\pi}{180} \right]$$

where:  $a_{i,k}$  = area ( $m^2$ ) within sector i and stratum k.

$r_{i,k}$  = distance (m) from transducer to the outer edge of sector i in stratum k.

b = beam width (degrees).

River cross-sectional areas were estimated using measurements of water level and transducer position relative to a fixed reference point, river bottom profiles, and hydroacoustic beam range. These methods are more readily visualized with the aid of the drawing presented in Figure 3. Beginning and ending ranges relative to the reference stake were calculated for each sector of the beam in a stratum. Water depths at each range were obtained from a bottom profile and were adjusted for changes in water level occurring since bottom profile measurement. Sonar beam width at range defined the upper corners of the bottom stratum, and this area was calculated as the sum of the areas of a rectangle and two right triangles. The surface stratum area for sector i was then derived as the area defined by the range beginning and end points and the two upper corners of the bottom stratum (the sum of areas of a rectangle and a right triangle). Count expansion required defining the following parameters for each of the three hydroacoustic beams used:

$R_i$  = River cross-sectional area in sector i.

$S_i$  = Surface stratum cross-sectional area in sector i.

$B_i$  = Bottom stratum cross-sectional area in sector i.

$s_i$  = starting range in sector i.  
 $e_i$  = ending range in sector i.  
 $f_i$  = starting depth of the bottom stratum in sector i.  
 $g_i$  = ending depth of the bottom stratum in sector i.  
 $h_i$  = starting depth of the surface stratum in sector i.  
 $m_i$  = ending depth of the surface stratum in sector i.  
 $t_k$  = relative transducer position in location k.  
 $b$  = beam width in degrees.

Then:

$$R_i = 0.5 (e_i - s_i) (g_i + f_i)$$

$$S_i = 0.5 (e_i - s_i) (m_i + h_i)$$

$$B_i = \left( \frac{\tan b}{360} \right) (e_i - s_i) ((e_i - t) + (s_i - t))$$

**Temporal Expansion.** The spatially expanded daily net number of upstream moving targets for each sector ( $n_{i,d}^{\text{exp}}$ ) was divided by the proportion of the time period sampled to estimate  $N_{i,d}$ , the temporally and spatially expanded estimate of the number of fish in sector i on day d.

$$N_{i,d} = n_{i,d}^{\text{exp}} \frac{(24)(60)}{t_{i,d}}$$

where:  $N_{i,d}$  = estimated fish passage in sector i on day d

$n_{i,d}^{\text{exp}}$  = net number of upstream targets in sector i on day d expanded for areas not sampled

$t_{i,d}$  = time (minutes) sampled in sector i on day d

Implicit in expanding the number of targets is the assumption that fish are uniformly distributed within the area or time strata being expanded.

**Estimation of Missing Data.** Fish passage for days on which no sampling occurred was estimated as the average of one day preceding and one day subsequent to the day in question.

## *Species Allocation*

### **Sampling Design**

Perhaps the most difficult component of the escapement estimation program is the allocation of sonar counts to species. The presence of migratory and resident species, with similar migratory timing and behavior and different sizes and body shapes, are primary causes of difficulty in estimation of species proportions. Gill nets are the most appropriate sampling tool available in this environment because they will capture all salmon species present and can be deployed in the spatial strata that are sampled hydroacoustically. The breadth of the size distribution of fish in the river, however, is greater than the breadth of fish sizes that may be effectively captured in any one mesh size of gill net. Therefore, it is necessary to use a suite of mesh sizes to sample the fish population.

For each fish species or similarly-sized species group encountered in the Yukon we chose two gill net mesh sizes which together would effectively capture fish throughout the entire range of previously documented lengths. Thus, two mesh sizes fished for chinook salmon, two mesh sizes fished for chum and coho salmon, and two mesh sizes fished for pink salmon, whitefish, and other species.

Since species composition varies between river banks, a stratified systematic sampling design was employed with left and right bank strata. Waters along each bank were sampled between 0800 and 2200 hours each day. Sample size was determined from multinomial proportions estimation theory (Thompson 1987) for accuracy ( $d$ ) of 0.1 and precision ( $\alpha$ ) of a one-in-ten chance of not having the correct species proportion ( $p_i$ ) within the interval  $p_i \pm d$  for all  $i$  categories, where  $i$  equals three categories of fish present in the river at a given point in the salmon migration.

### **Equipment and Procedures**

Six gill nets measuring 45.7 m (150 ft) long and 7.6 m (25 ft) deep were used for test fishing. Mesh sizes (stretched) were 101.6 mm (4.0 in), 127.0 mm (5.0 in), 139.7 mm (5.5 in), 165.1 mm (6.5 in), 190.5 mm (7.5 in), and 215.9 mm (8.5 in). Drifts of approximately 10 minutes duration were made alternately along left and right banks. Care was taken to maintain similar effort among mesh sizes. Gill nets were drifted through the same areas on each bank throughout the season. Reduced water levels, however, resulted in fish distribution to greater ranges on the left bank after August, necessitating establishment of inshore and offshore drifts. Fish distribution remained unchanged on the right bank and the inshore ends of the nets were fished as close as possible to shore.

To calculate total fishing time four parameters were measured for each drift: 1) net start out; 2) net full out; 3) net start in; 4) net full in. At the end of each drift the net was hauled into the boat as fish were disentangled. Each fish was identified to species, measured (mid-eye to tail fork for salmon and snout to tail fork for non-salmon), and checked for signs of wedging or tangling.

### **Analytical Methods**

Gill nets capture fish in one of two ways; individuals may be wedged between the dorsal fin and the gill opercula, or they may become tangled in the web by their teeth or maxillaries. The probabilities of these events are specific to fish length, gill net mesh size, and species. Catches are adjusted for sampling effort and for differential probability of being captured among species, length categories, and gill net mesh sizes. The relative standardized CPUE by species are used to apportion expanded fish counts.

**Estimation of Relative Abundance.** For a detailed explanation of the theory and method used to determine relative abundance refer to the 1989 Yukon Sonar project annual report (LaFlamme and Mesiar 1990).

**Migratory Run Timing.** The mean date of migration and associated standard deviation for each fish species present in the Yukon River while the project was operational was calculated following the method outlined by Mundy (1982).

## **RESULTS**

### *Hydroacoustic Counting*

#### **Estimation of Total Daily Passage**

The Yukon sonar project was operational from 9 June through 12 September in 1986. Net upstream fish counts, temporal and spatial expansion factors, sampling times, and fish passage estimates for each day are presented in Appendix Tables 28 and 29. Temporal expansion factors were 3.0 and 6.0 for left and right banks prior to 18 July; after that date expansion factors were 4.5 and 5.14. Spatial expansion factors on the left bank ranged from 1.0 (no expansion) to 5.9 while those on the right bank ranged from 1.0 to 4.3, depending on water level and fish distance from the transducer. Spatial expansion factors generally decreased as the season progressed due to dropping water levels.

Daily and seasonal fish passage estimates by bank are summarized in Appendix Tables 1, 2, and 3. A total of 4,309,220 fish passed the sampling site; 76 percent (3,280,206) and 24 percent (1,029,014) of the total passed the left and right banks (Figure 4). The highest daily passage (362,600 fish) occurred on 20 June.

### **Estimation of Missing Data**

Budgetary constraints forced temporary cessation of sampling on 04 July. Fish passage for the day was estimated as 54,470 fish, of which 59 percent (32,063) passed the left bank and the remaining 41 percent (22,407) passed the right bank.

### *Species Allocation*

#### **Estimation of Species Proportions**

Sampling of the migrant fish population for use in estimation of species proportions began on 10 June and continued through 12 September. The catch totaled 5,762 fish.

A total of 211 chinook salmon were captured in 190.5 and 215.9 mm mesh gill nets. The majority (76 percent) were gilled or wedged; the remaining 24 percent were tangled. Fifty four percent of the gilled fish were caught in 190.5 mm (7.5 in) gear and the remaining 46 percent were caught in 215.9 mm (8.5 in) gear. Catch (gilled and tangled) on the left bank totaled 105 chinook salmon while catch on the right bank totaled 106 chinook salmon. No chinook salmon were captured in nets drifted offshore to check for extended fish distribution.

Summer chum salmon catches totaled 1,417 in 139.7 mm (5.5 in) and 165.1 mm (6.5 in) gill nets. Of these, 1,288 (91 percent) were gilled or wedged and 129 (9 percent) were tangled in both gear sizes. Seventy percent of the gilled fish were captured in the 139.7 mm (5.5 in) mesh nets. A total of 564 fish (40 percent) were gilled or tangled on the left bank while 853 (60 percent) were caught on the right bank.

A total of 580 fall chum were captured in 139.7 mm (5.5 in) and 165.1 mm (6.5 in) gill nets. Five hundred twelve fish (93 percent) were gilled or wedged, and of these, 50 percent were captured in each mesh size net. A total of 386 fish (66 percent) were captured on the left bank while 194 (33 percent) were captured on the right bank.

Coho salmon gill net catches in 139.7 mm (5.5 in) and 165.1 mm (6.5 in) mesh gill nets totaled 601 fish. The majority (91 percent) were either gilled or wedged with 337 (62 percent) and 308 (38 percent) in each

mesh size. A total of 172 (29 percent) were captured on the left bank while 429 (71 percent) were captured on the right bank.

A total of 1,116 pink salmon were captured in 101.6 mm (4.0 in) and 127.0 mm (5.0 in) mesh gill nets. Eight hundred ninety one fish (80 percent) were gilled or wedged with 539 (60 percent) and 352 (40 percent) in each mesh size net. A total of 688 (62 percent) were captured on the left bank while 428 (38 percent) were captured on the right bank.

The remainder of the gill net catch was composed of sockeye salmon and non-salmon species. Only five sockeye salmon were captured in 1989. Non-salmon catches totaled 330 fish. Non-salmon species included humpback whitefish (*Coregonus pidschian*), broad whitefish (*C. nasus*), Least cisco (*C. sardinella*), sheefish (*Stenodus leucichthys*), northern pike (*Esox lucius*), burbot (*Lota lota*), and dolly varden (*Salvelinus malma*). The majority (81 percent) of the fish captured were either gilled or wedged with 155 (69 percent) in the 101.6 mm (4.0 in) gill nets. A total of 156 fish (47 percent) were caught on the left bank while 174 fish (53 percent) were caught on the right bank.

Length frequencies, regression coefficients and statistics, and selectivity coefficients and curves used to estimate the number of fish of each species encountering each of the two nets fished are presented by species in Appendix Tables 4 through 27 and Appendix Figures 1 through 18. These estimates, as well as raw catch, catch adjusted for net selectivity, wedging probability and effort appear in Appendix Tables 30 and 31. Summer chum salmon dominated the species composition (Figure 5) between 09 June and 04 July, comprising between 50 and 100 percent of the population. Pink salmon were predominant between 05 and 22 July; fall chum salmon were the most abundant species between 23 July and 20 August. Coho salmon dominated the species composition from 21 August to termination of sampling.

#### Estimation of Daily Passage

The total estimated fish passage of 4,309,220 fish is apportioned to species in Table 1, and histograms of daily fish passage by species are shown in Figures 6 and 7. Time periods and species proportions used in this analysis are presented in Table 2. Left bank, right bank, and combined bank estimates of fish passage by day and species are listed in Appendix tables one through three. Migratory timing statistics appear in Table 3. Estimates are discussed by species in the following text.

The estimated chinook salmon escapement past the sampling site was 89,733 fish or 2 percent of the total salmon escapement. The highest daily passage occurred on 21 June when 27,899 chinook were counted. Most chinook salmon (80 percent) traveled along the left bank. The migration was in progress at project start-up on 9 June and continued

until 14 July. The mean date of chinook salmon migration was 22 June (s.d.= 4)

Summer chum salmon were the most abundant species counted; an estimated 2,027,860 passed the site between 09 June and 18 July. This escapement level represents 47 percent of the total fish passage in 1986. Highest daily passage occurred on 20 June, when 342,014 fish were counted. The majority (71 percent) passed along the left bank. The migration was in progress when the project became operational on 9 June; a total passage of 499 summer chum was estimated on this date. The mean date of migration is 23 June (s.d.= 6).

An estimated 708,379 fall chum salmon passed the sonar site representing 16 percent of the total fish passage in 1986. The highest daily passage (60,257) occurred on 04 August. The largest segment of the fall chum run (86 percent) passed along the left bank. Fall chum were present at river mile 123 from 19 July until the last day of operation (12 September). Although the fall chum run was not complete, daily passage had dropped to 1,570 fish per day. The mean date of migration is 06 August (s.d.= 11).

The coho salmon run consisted of an estimated 246,397 fish through the last day of operation in 1986. The coho run comprised only 6 percent of the total season fish passage. The highest daily passage was 18,375 coho salmon on 28 August. Sixty eight percent passed the left bank and 32 percent passed the right bank. Coho salmon were present at the site from 5 August through the termination of sampling. The migration was not yet complete on the last day of operation, as indicated by an estimated daily count of 3,815 fish. Based on the days sampled, the coho run mean date of migration is 26 August (s.d.=10).

An estimated 1,017,396 pink salmon passed the site between 02 July and 04 August, comprising 24 percent of the total fish passage. Highest daily passage (82,776 fish) occurred on 09 July. Eighty percent of the pink salmon passed the left bank of the river. The mean date of migration is 14 July (s.d.= 6)

All non-salmon species were pooled to apportion hydroacoustic counts. Total estimated passage in 1986 was 219,454 fish representing 5 percent of all fish passage. The peak daily passage was 14,299 fish on 09 August. A total of 161,860 fish (74 percent) passed the left bank while 57,594 fish (26 percent) passed the right bank. These species were present from 02 July through the last day of counting. Whitefish species accounted for the majority of non-salmon species intercepted in 1986. Mean date of migration was 10 August (s.d.= 15).

## DISCUSSION

### *Hydroacoustic Counting*

#### **Estimation of Total Daily Fish Passage**

Hydroacoustic fish passage estimates, though extremely precise, may be subject to bias attributable to errors in fish counting, or to errors in expansion factor development and species composition. First, there may exist areas of the river cross section utilized by salmon that are not being sampled. In the Yukon River the nearshore water column is intensively sampled and data gathered to date suggests that fish are not migrating in mid-river areas. Changes in the dynamic riverine environment, however, may prompt changes in fish behavior. Mid-river areas should therefore be systematically sampled each year to assure that all migratory pathways are either ensonified or otherwise accounted for.

Another counting problem is downstream-directed targets counted as debris which may in fact be fish. Some downstream-directed fish traces are easily identified from trace patterns on chart recordings. Other, less easily identifiable traces may require qualification through establishment of some type of ground truth project. Recent work on the left bank of the Yukon with a transducer aimed directly upstream showed that 12 percent of the 1500 targets passing through the beam were moving downstream. Identification of targets may be accomplished through use of gill nets or dual-beam target strength information.

Spatial expansion factors may also bias fish passage estimates if the true cross-sectional area of the beam is different from that calculated based on acoustic parameters under which the system is operating. This is a property of average fish target strength and attitude (position in the sonar beam) which varies within and between years and should be frequently measured.

These errors are probably consistent over time and, if occurring, will be manifest in consistent differences between sonar and other estimates of population size. Controlling bias requires careful and continuous evaluation of bottom topography, calculation of beam size, and identification of downstream-moving targets and fish migratory pathways.

Other factors associated with counting passing targets contribute to variance in fish passage estimates. The most serious of these factors on the Yukon is the physical instability of the left bank site. The constantly shifting bottom sediments at this location make transducer deployment and operation a continual challenge. A site that appears perfectly suited for transducer location may change in a matter of hours to one that is unusable. Rapidly changing water levels tend to

erode or deposit bottom sediments with the net effect being burial of the transducer. This both reduces sampling and increases personnel costs. Changes in transducer pod design and retrieval procedures have alleviated some of the difficulties caused by left bank river bottom instability. The risk of equipment loss and the amount of effort expended retrieving equipment have been cut substantially. Until another method of transducer deployment is found, however, there will continue to be days with reduced sampling on the left bank and subsequent estimation of passage through interpolation or modeling based on the right bank fish passage.

### *Species Allocation*

#### **Estimation of Species Proportions**

The technique used to estimate species proportions assumes that fish temporal and spatial distribution does not differ between species, with the exception of pink salmon and whitefish which are known to travel near shore. Non-random deployment of nets within the area of fish migration may result in over- or under-representation of certain species depending on whether or not they are uniformly distributed in time and space.

At least three sources of variance exist in the species proportion estimator. Selectivity coefficients of the gill nets for each species have been estimated based on only current year length frequency data. Small catches, combined with the degree of stratification required to use this technique, results in sample sizes that are smaller than desired and selectivity coefficient estimates that are highly variable. Additionally, the division of the catch from two mesh sizes into three groups for selectivity adjustment, wedging probability estimation, and subsequent combination into a CPUE value for the species, is based on an arbitrarily chosen selectivity/length threshold. The sensitivity of wedging probability and CPUE values to choice of a threshold value should be examined and the resultant variance should be estimated. The third source of variance is that resulting from the estimation of multinomial proportions.

#### **Estimation of Daily Passage**

The Yukon River Sonar project in 1986 provided in-season run strength information to fishery managers within twelve hours of cessation of sampling each day. Post season comparison shows approximate agreement between sonar-based escapement estimates and the sum of commercial and subsistence catch and survey-based escapement estimates. For a more complete discussion of these data see Sandone (1990). Consistent production of timely escapement information will help to make the sonar project an integral part of lower Yukon River fishery management strategy for all managed species.

## LITERATURE CITED

- LaFlamme, T. R., and D. C. Mesiar. 1990. Yukon River sonar escapement estimate 1989. Regional Information Report No. 3A90-29. Alaska Department of Fish and Game, Commercial Fisheries Division, November, 1990. 30pp.
- Mesiar, D.C., D.M. Eggers and D.M.Gaudet, 1986. Hydroacoustic enumeration of salmon escapement to the Yukon River in 1985. Arctic-Yukon-Kuskokwim Region, Yukon River Salmon Escapement Report No. 27. Alaska Department of Fish and Game, Commercial Fisheries Division. April, 1986.
- Mundy, P.R. 1982. Computation of migratory timing statistics for adult chinook salmon in the Yukon River, Alaska, and their relevance to fisheries management. North American Journal of Fisheries Management, 4:359 - 370.
- Nickerson, R.B., and D.M. Gaudet. 1985. Sonar feasibility studies in the lower Kuskokwim and Yukon Rivers 1980 - 1983. Draft manuscript. Alaska Department of Fish and Game, Commercial Fisheries Division. 21 March, 1985. 112 pp.
- Sandone, Gene J. 1990. In Prep. Yukon River salmon exploitation analysis. Regional Information Report No. 3A90-xx. Alaska Department of Fish and Game, Commercial Fisheries Division.
- Thompson, Steven K. 1987. Sample size for estimating multinomial proportions. The American Statistician 41(1). 122-132.

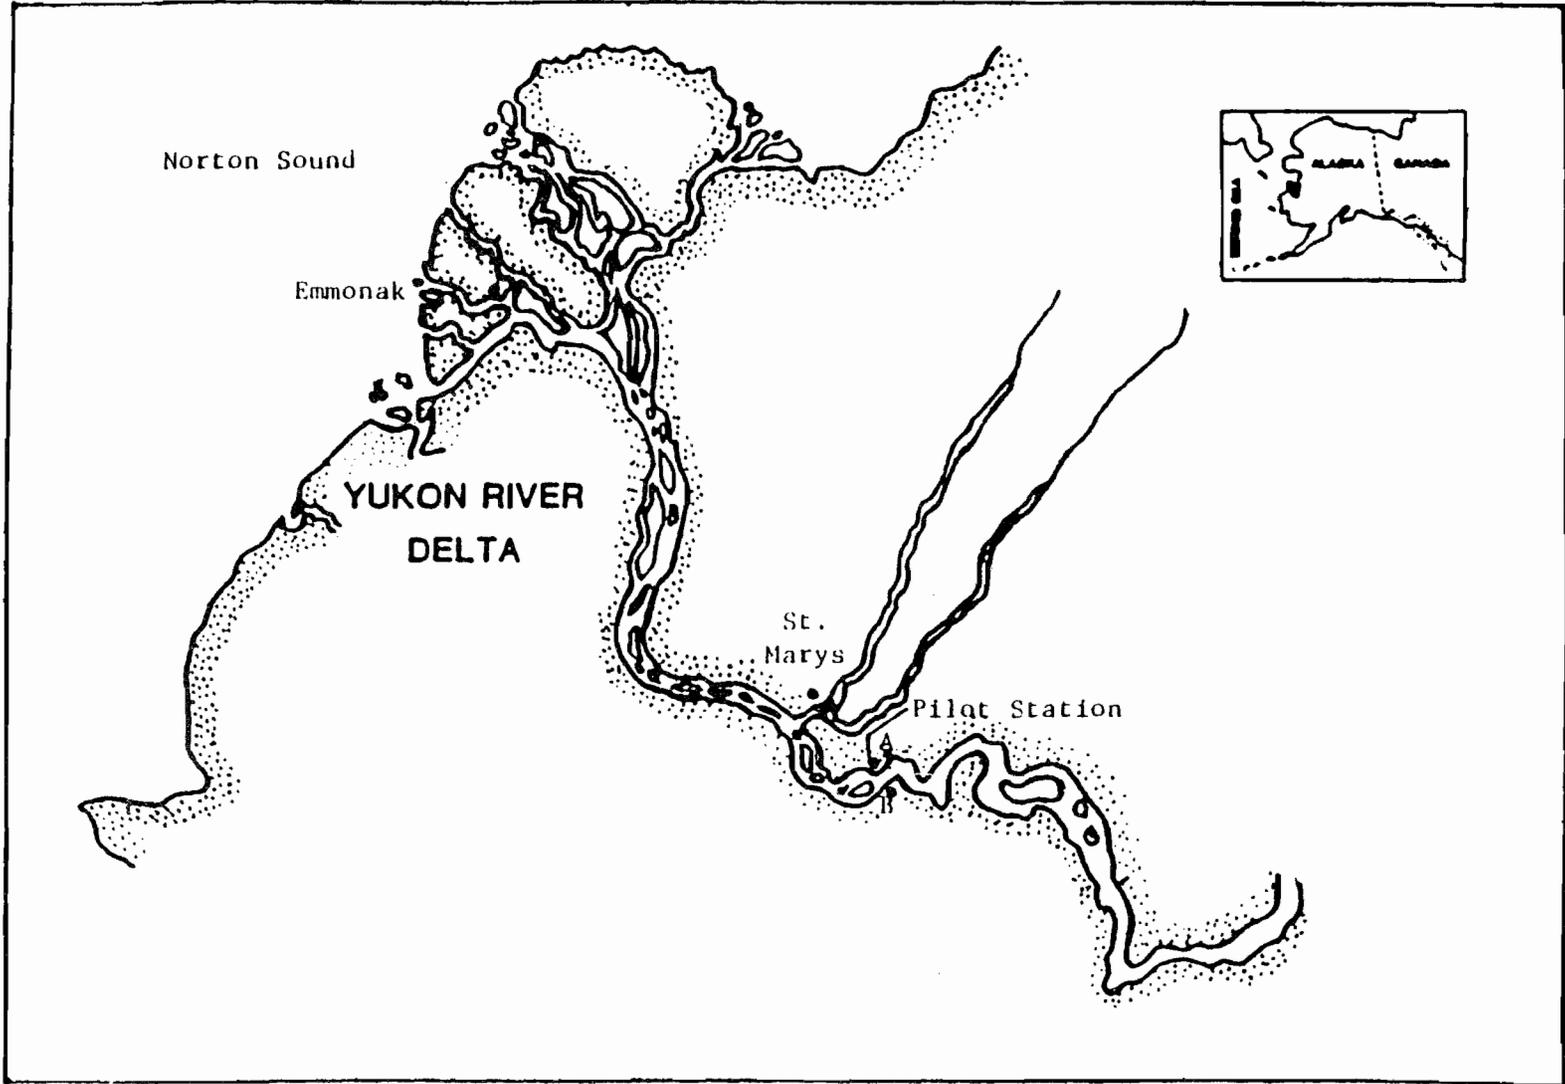
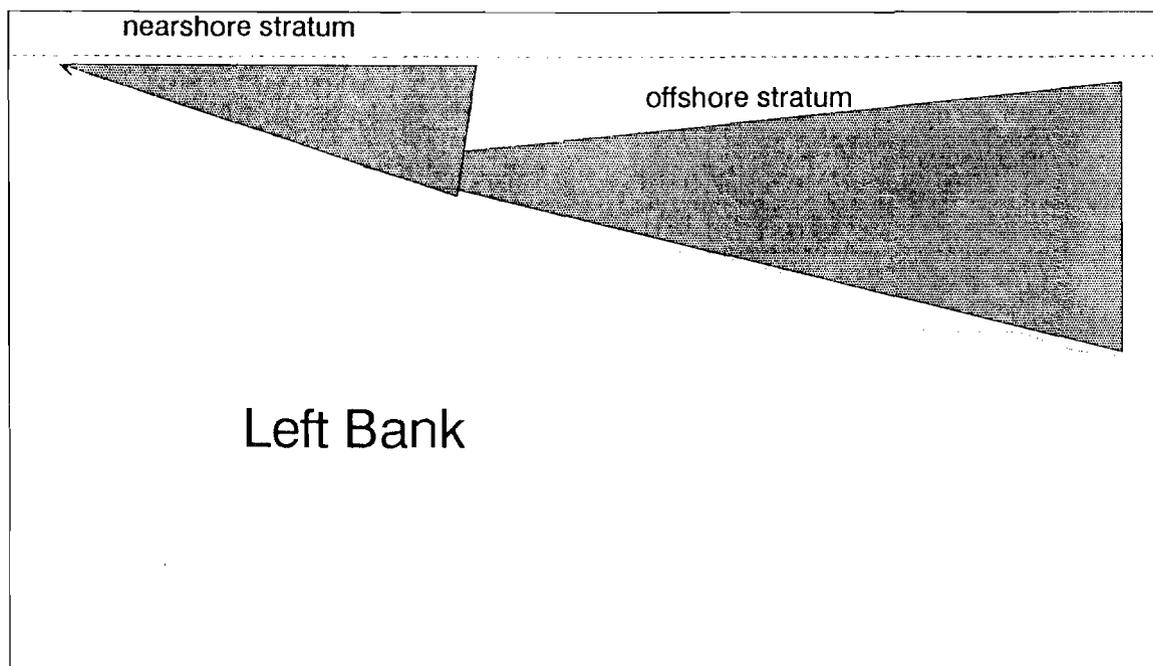
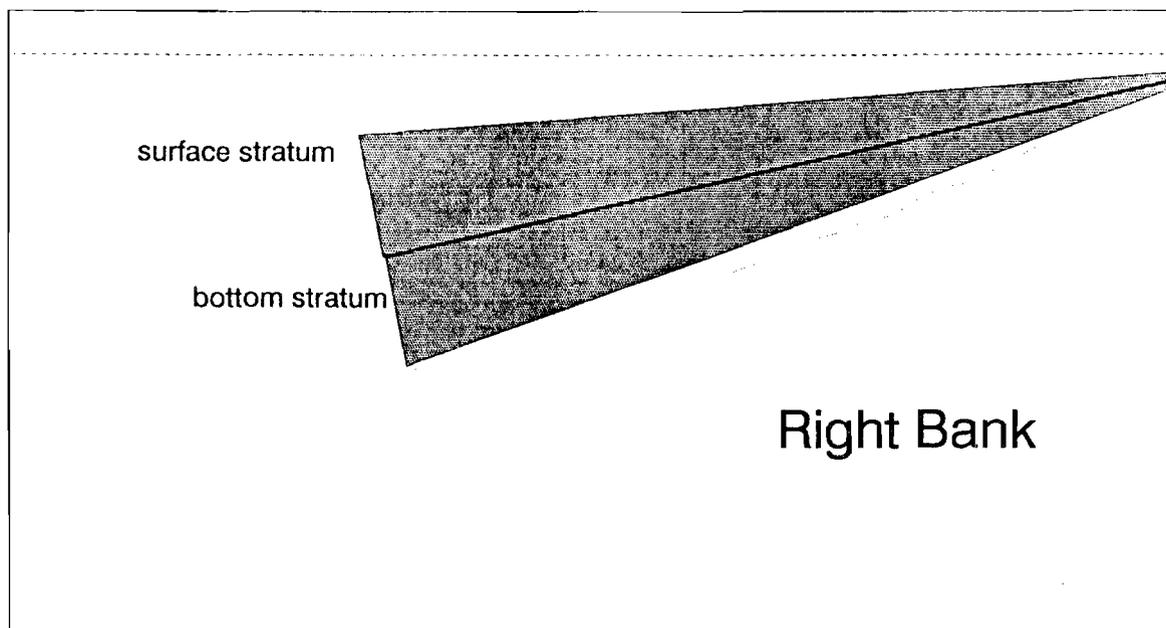


Figure 1. Map of the lower Yukon River showing the two sites used for hydroacoustic escapement enumeration, Yukon Sonar, 1986.



**Figure 2.** Areas of the Yukon River cross section sampled hydroacoustically at km 197 in 1986.

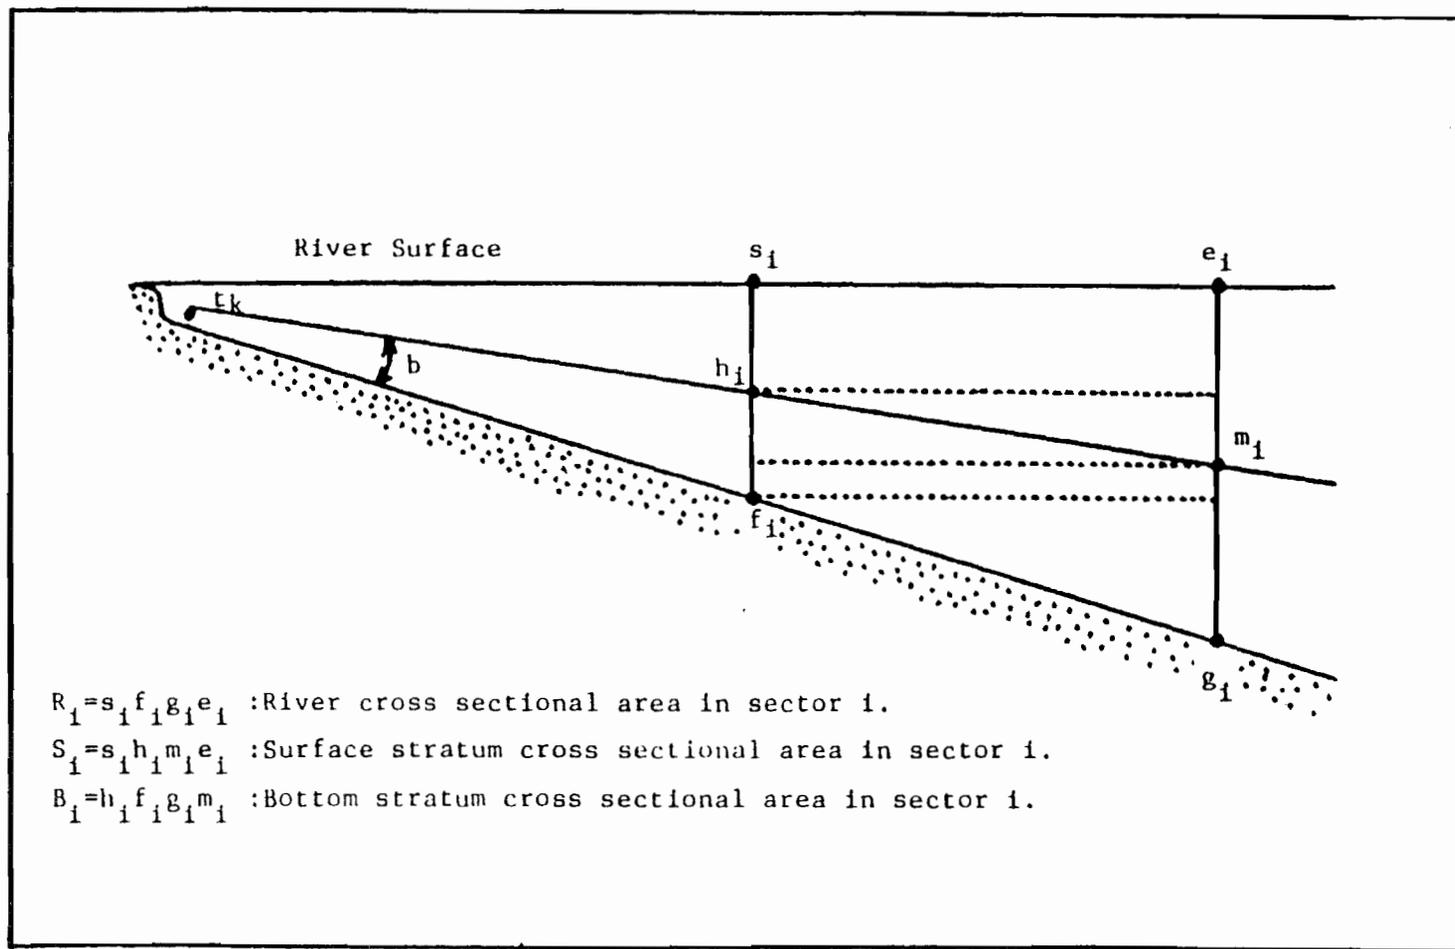


Figure 3. Geometric representation of river and beam cross sectional areas used for calculation of spatial expansion factors for counts of fish obtained hydroacoustically, Yukon Sonar, 1986.

## Yukon River Sonar, 1986

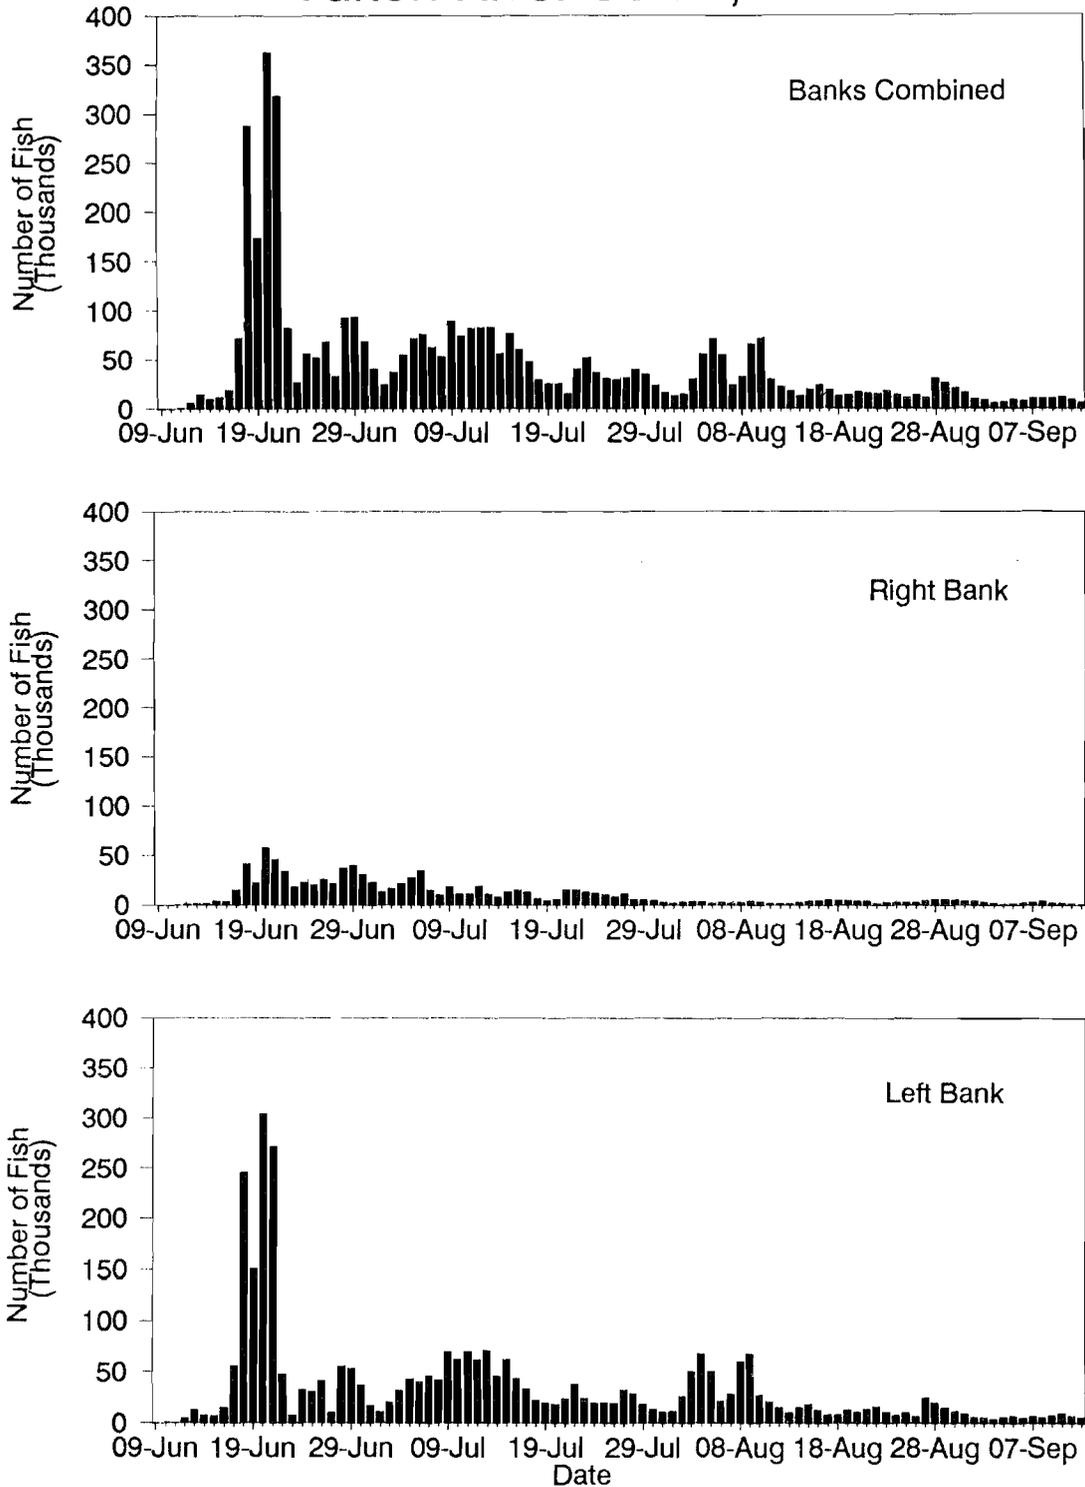


Figure 4. Daily fish passage estimates for combined banks, left bank, and right bank at km 197, Yukon River, 1986.

# Yukon River Sonar, 1986

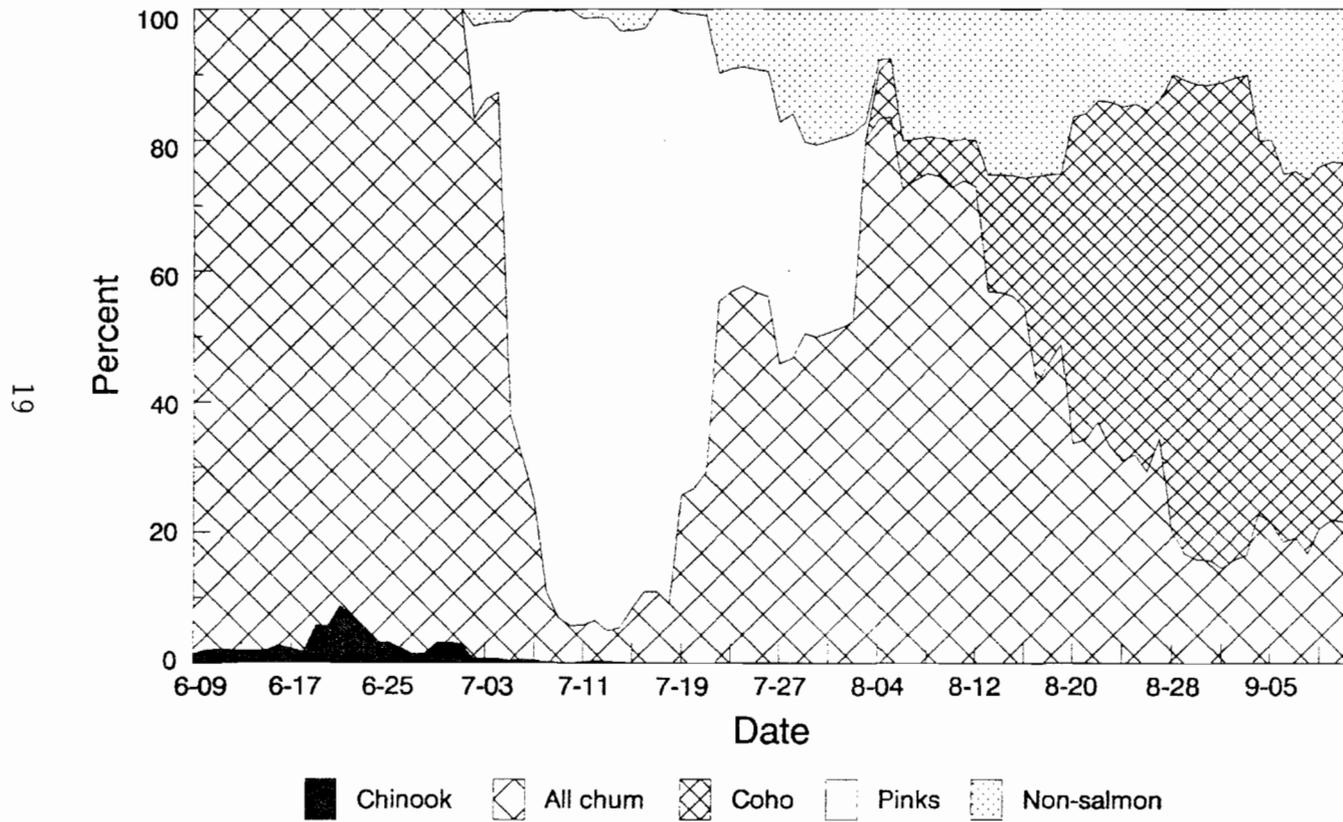


Figure 5. Species proportions between 09 June and 12 September at km 197, Yukon River, 1986.

# Yukon River Sonar, 1986

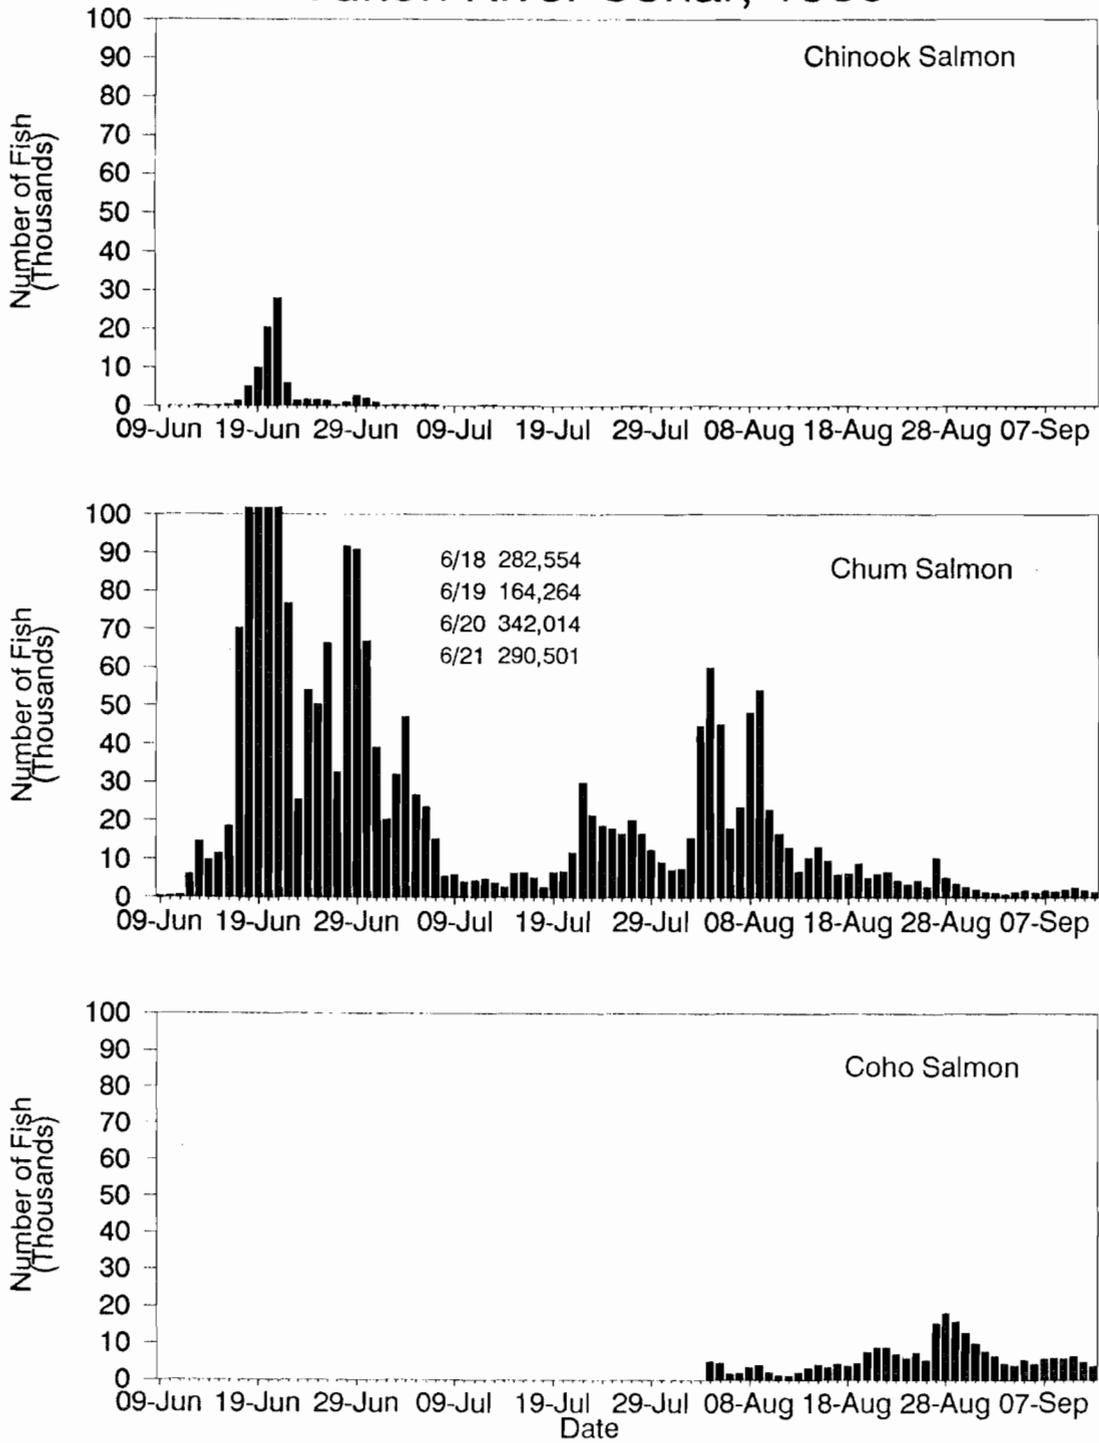


Figure 6. Daily fish passage estimates for chinook salmon, summer and fall chum salmon, and coho salmon at km 197, Yukon River, 1986.

# Yukon River Sonar, 1986

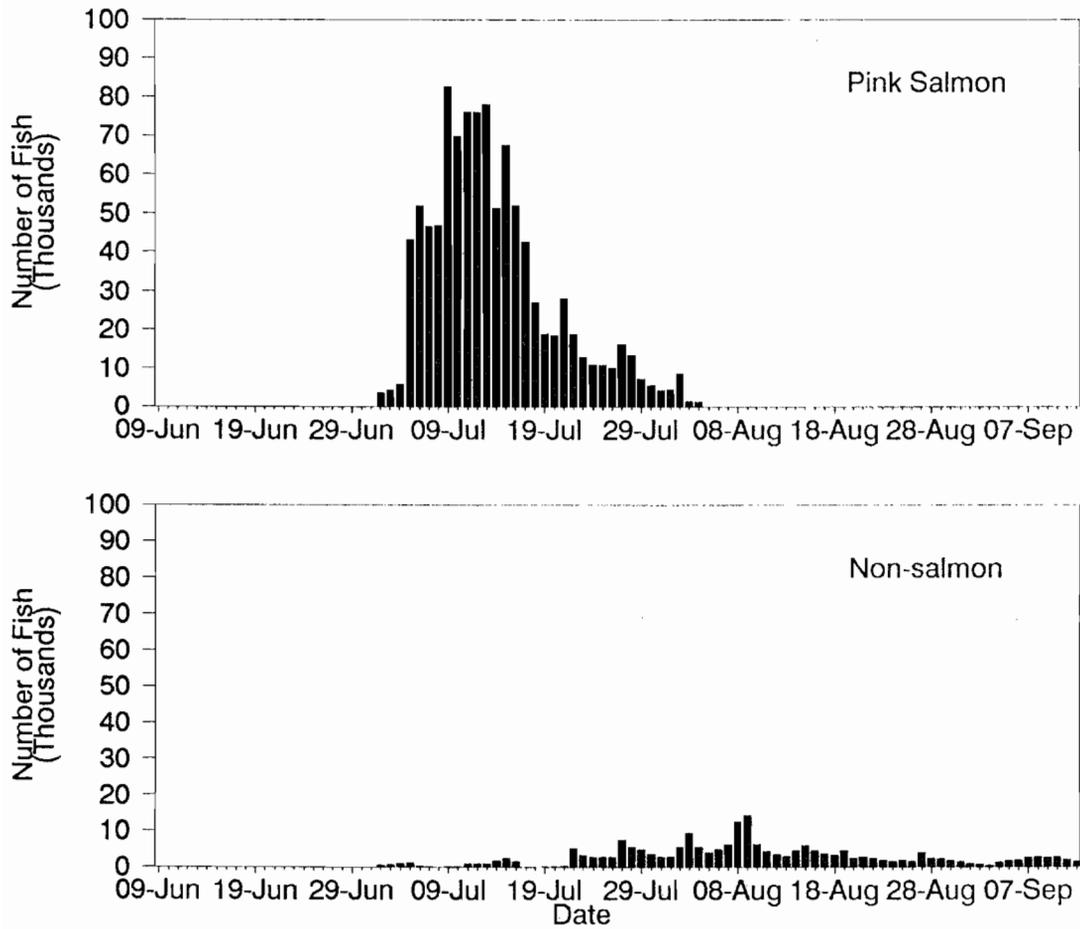


Figure 7. Daily fish passage estimates for pink salmon and non-salmon species at km 197, Yukon River, 1986.

Table 1. Estimated escapements of chinook, summer chum, fall chum, coho, and pink salmon, and non-salmon species past km 197, Yukon River, 1986.

Chinook	Summer chum	Fall chum	Coho	Pinks	Non-salmon	Total
89,733	2,027,860	708,379	246,397	1,017,396	19,454	4,309,220

Table 2. Species allocation time periods and species proportions for left and right bank Yukon River sonar escapement estimates, 1986.

Right Bank							
Dates	Chinook	Summer Chum	Fall Chum	Coho	Pinks	Non-salmon	n
10-15 June	0.017	0.983	0	0			90
16-18 June	0.057	0.943	0	0			90
19-21 June	0.028	0.972	0	0			132
22-25 June	0.038	0.962	0	0			63
26-28 June	0.015	0.985	0	0			58
29 June-01 July	0.045	0.955	0	0			97
02-05 July	0.005	0.687	0	0	0.260	0.048	115
06-08 July	0.010	0.473	0	0	0.509	0.009	98
09-11 July	0.000	0.243	0	0	0.744	0.013	102
12-14 July	0.006	0.178	0	0	0.808	0.008	85
15-18 July	0	0.337	0	0	0.663	0.000	126
19-21 July	0	0	0.422	0	0.552	0.026	67
22-26 July	0	0	0.723	0	0.253	0.024	76
27 July-04 August	0	0	0.381	0	0.322	0.298	102
05-16 August	0	0	0.402	0.309	0	0.289	76
17-22 August	0	0	0.200	0.534	0	0.266	74
23-28 August	0	0	0.091	0.691	0	0.217	114
29-31 August	0	0	0.000	0.777	0	0.223	76
01-05 September	0	0	0.029	0.795	0	0.176	82
06-12 September	0	0	0.019	0.641	0	0.340	99

Left Bank							
Dates	Chinook	Summer Chum	Fall Chum	Coho	Pinks	Non-salmon	n
10-16 June	0.021	0.978	0	0	0	0	71
17-18 June	0.012	0.988	0	0	0	0	100
19-20 June	0.062	0.938	0	0	0	0	71
21-23 June	0.098	0.902	0	0	0	0	46
24-26 June	0.028	0.972	0	0	0	0	49
27-28 June	0.012	0.988	0	0	0	0	28
29-30 June	0.019	0.981	0	0	0	0	41
01-04 July	0.009	0.991	0	0	0	0	35
05-07 July	0.003	0.169	0	0	0	0	179
08-10 July	0.000	0.021	0	0	0.979	0	101
11-13 July	0.002	0.026	0	0	0.958	0.015	122
14-16 July	0	0.028	0	0	0.933	0.040	104
17-18 July	0	0.016	0	0	0.984	0.000	44
19-21 July	0	0	0.213	0	0.787	0.000	50
22-28 July	0	0	0.485	0	0.387	0.128	78
29 July-02 August	0	0	0.543	0	0.284	0.174	49
03 August	0	0	0.839	0	0	0.161	10
04-05 August	0	0	0.857	0.078	0	0.065	19
06-12 August	0	0	0.768	0.042	0	0.190	98
13-19 August	0	0	0.599	0.155	0	0.246	98
20-27 August	0	0	0.393	0.485	0	0.123	108
28 August-03 September	0	0	0.237	0.701	0	0.062	63
04-12 September	0	0	0.270	0.524	0	0.207	80

Table 3. Run timing parameters, based on hydroacoustic escapement estimates of chinook, summer chum, fall chum, coho, and pink salmon, and other (pooled) species at river km 197, Yukon sonar, 1986.

Species	Run Timing Parameters <sup>1/</sup>			
	Start	End	Mean	S.D. of Mean
Chinook	09 June	14 July	22 June	4
Summer chum	09 June	18 July	23 June	6
Fall chum	19 July	12 Sept.	06 August	11
Coho	05 August	12 Sept.	26 August	10
Pink	02 July	04 August	14 July	6
Non-salmon	02 July	12 Sept.	10 August	15

<sup>1/</sup> Run timing is based on the counts obtained during project operation. The actual run timing may differ depending on the portion of the escapement occurring before and after project start-up and termination dates.

