

Fishery Data Series No. 25-25

Sonar Estimation of Fall Chum Salmon in the Sheenjek River, Alaska, 2024

by

Ann Crane

and

Jody Lozori

July 2025

Alaska Department of Fish and Game

Divisions of Sport Fish and Commercial Fisheries



Symbols and Abbreviations

The following symbols and abbreviations, and others approved for the Système International d'Unités (SI), are used without definition in the following reports by the Divisions of Sport Fish and of Commercial Fisheries: Fishery Manuscripts, Fishery Data Series Reports, Fishery Management Reports, and Special Publications. All others, including deviations from definitions listed below, are noted in the text at first mention, as well as in the titles or footnotes of tables, and in figures or figure captions.

Weights and measures (metric)		General		Mathematics, statistics		
centimeter	cm	Alaska Administrative Code	AAC	all standard mathematical signs, symbols and abbreviations		
deciliter	dL	all commonly accepted abbreviations	e.g., Mr., Mrs., AM, PM, etc.	alternate hypothesis	H _A	
gram	g	all commonly accepted professional titles	e.g., Dr., Ph.D., R.N., etc.	base of natural logarithm	e	
hectare	ha			catch per unit effort	CPUE	
kilogram	kg			coefficient of variation	CV	
kilometer	km	at compass directions:	@	common test statistics	(F, t, χ^2 , etc.)	
liter	L			confidence interval	CI	
meter	m			correlation coefficient (multiple)	R	
milliliter	mL	east	E	correlation coefficient (simple)	r	
millimeter	mm	north	N	covariance	cov	
Weights and measures (English)		south	S	degree (angular)	°	
	cubic feet per second	ft ³ /s	west	degrees of freedom	df	
	foot	ft	copyright	expected value	E	
	gallon	gal	corporate suffixes:	greater than	>	
	inch	in	Company	greater than or equal to	≥	
	mile	mi	Corporation	harvest per unit effort	HPUE	
	nautical mile	nmi	Incorporated	less than	<	
	ounce	oz	Limited	less than or equal to	≤	
	pound	lb	District of Columbia	logarithm (natural)	ln	
	quart	qt	et alii (and others)	et al.	logarithm (base 10)	log
yard	yd	et cetera (and so forth)	etc.	logarithm (specify base)	log ₂ , etc.	
Time and temperature		exempli gratia (for example)	e.g.	minute (angular)	'	
	day	d	Federal Information Code	not significant	NS	
	degrees Celsius	°C	id est (that is)	null hypothesis	H ₀	
	degrees Fahrenheit	°F	latitude or longitude	percent	%	
	degrees kelvin	K	monetary symbols (U.S.)	probability	P	
	hour	h	months (tables and figures): first three letters	probability of a type I error (rejection of the null hypothesis when true)	α	
	minute	min	registered trademark	probability of a type II error (acceptance of the null hypothesis when false)	β	
	second	s	trademark	second (angular)	"	
	Physics and chemistry		United States (adjective)	U.S.	standard deviation	SD
		all atomic symbols		United States of America (noun)	standard error	SE
alternating current		AC	U.S.C.	variance		
ampere		A	U.S. state	population	Var	
calorie		cal		sample	var	
direct current		DC				
hertz		Hz				
horsepower		hp				
hydrogen ion activity (negative log of)		pH				
parts per million		ppm				
parts per thousand	ppt, ‰					
volts	V					
watts	W					

FISHERY DATA SERIES NO. 25-25

**SONAR ESTIMATION OF FALL CHUM SALMON IN THE SHEENJEK
RIVER, ALASKA, 2024**

by

Ann Crane and Jody Lozori

Alaska Department of Fish and Game, Division of Commercial Fisheries, Fairbanks

Alaska Department of Fish and Game
Division of Sport Fish, Research and Technical Services
333 Raspberry Road, Anchorage, Alaska, 99518-1565

July 2025

This investigation was financed by the U.S./Canada Treaty Implementation funds administered by the U.S. Fish and Wildlife Service, Agreement Award F18AP00851.

ADF&G Fishery Data Series was established in 1987 for the publication of Division of Sport Fish technically oriented results for a single project or group of closely related projects, and in 2004 became a joint divisional series with the Division of Commercial Fisheries. Fishery Data Series reports are intended for fishery and other technical professionals and are available through the Alaska State Library and on the Internet: <http://www.adfg.alaska.gov/sf/publications/>. This publication has undergone editorial and peer review.

Product names used in this publication are included for completeness and do not constitute product endorsement. The Alaska Department of Fish and Game does not endorse or recommend any specific company or their products.

*Ann Crane and Jody Lozori,
Alaska Department of Fish and Game, Division of Commercial Fisheries,
1300 College Road, Fairbanks, AK 99701, USA*

This document should be cited as follows:

Crane, A. B., and J. D. Lozori. 2025. Sonar estimation of fall chum salmon in the Sheenjek River, Alaska, 2024. Alaska Department of Fish and Game, Fishery Data Series No. 25-25, Anchorage.

The Alaska Department of Fish and Game (ADF&G) administers all programs and activities free from discrimination based on race, color, national origin, age, sex, religion, marital status, pregnancy, parenthood, or disability. The department administers all programs and activities in compliance with Title VI of the Civil Rights Act of 1964, Section 504 of the Rehabilitation Act of 1973, Title II of the Americans with Disabilities Act (ADA) of 1990, the Age Discrimination Act of 1975, and Title IX of the Education Amendments of 1972.

If you believe you have been discriminated against in any program, activity, or facility please write:

ADF&G ADA Coordinator, P.O. Box 115526, Juneau, AK 99811-5526
U.S. Fish and Wildlife Service, 4401 N. Fairfax Drive, MS 2042, Arlington, VA 22203
Office of Equal Opportunity, U.S. Department of the Interior, 1849 C Street NW MS 5230, Washington DC 20240

The department's ADA Coordinator can be reached via phone at the following numbers:

(VOICE) 907-465-6077, (Statewide Telecommunication Device for the Deaf) 1-800-478-3648,
(Juneau TDD) 907-465-3646, or (FAX) 907-465-6078

For information on alternative formats and questions on this publication, please contact:

ADF&G, Division of Sport Fish, Research and Technical Services, 333 Raspberry Rd, Anchorage AK 99518 (907) 267-2517

TABLE OF CONTENTS

	Page
LIST OF TABLES.....	ii
LIST OF FIGURES.....	ii
ABSTRACT	1
INTRODUCTION.....	1
OBJECTIVES.....	2
METHODS.....	3
Study Area.....	3
Sonar Equipment and Operation.....	3
Sonar Data Processing and Passage Estimation.....	4
Missing Data.....	5
Spatial and Temporal Distributions.....	5
Age, Sex, and Length Sampling.....	6
Climatic and Hydrologic Observations.....	6
RESULTS AND DISCUSSION.....	6
Fall Chum Salmon Estimation.....	6
Spatial and Temporal Distribution.....	7
Fall Chum Age and Sex Composition	7
Climatic and Hydrologic Observations.....	7
ACKNOWLEDGMENTS	7
REFERENCES CITED	8
TABLES AND FIGURES.....	11

LIST OF TABLES

Table	Page
1 Annual passage estimates and passage timing for fall chum salmon runs at the Sheenjek River sonar project, 2003–2012 and 2022–2024.	12
2 Technical specifications for dual-frequency identification sonar (DIDSON) and adaptive resolution imaging sonar (ARIS) at the Sheenjek River sonar project, 2024.	13
3 Fall chum salmon daily and cumulative passage estimates at the Sheenjek River sonar project, 2024.	14
4 Sampling time missed, and the resulting number of fish added to the estimate at the Sheenjek River sonar project, 2024.	16
5 Climatic observations recorded daily at 1800 hours at the Sheenjek River sonar project site, 2024.	18

LIST OF FIGURES

Figure	Page
1 Alaska portion of the Yukon River drainage showing communities and fishing districts.....	20
2 The Sheenjek River drainage.	21
3 ARIS (adaptive resolution imaging) and DIDSON (dual-frequency identification) sonar equipment schematic at the Sheenjek River sonar project, 2024.	22
4 View of a DIDSON (dual-frequency identification sonar) mounted to an aluminum pod with a manual crank-style rotator at the Sheenjek River sonar project.	23
5 Depth profile of the Sheenjek River and approximate sonar ranges at the Sheenjek River sonar project, August 4, 2024.	24
6 Sheenjek River sonar project site illustrating locations of ARIS (adaptive resolution imaging) and DIDSON (dual-frequency identification) sonars and weir.	25
7 Left and right bank horizontal distribution of unexpanded fish targets at the Sheenjek River sonar project, August 5–September 25, 2024.	26
8 Percent of total passage, by hour, observed on the left bank, right bank, and both banks combined at the Sheenjek River sonar project, 2024.	27
9 Change in daily water elevation, relative to August 5, measured at the Sheenjek River sonar project, 2024.	28
10 Maximum and minimum daily water temperatures on the right bank at the Sheenjek River sonar project, 2024.	29

ABSTRACT

Dual-frequency identification (DIDSON) and adaptive resolution imaging (ARIS) sonars were used to estimate adult fall chum salmon *Oncorhynchus keta* passage in the Sheenjek River from August 5 to September 25, 2024. A total of 11,803 (SE 229) fall chum salmon were estimated to have passed the sonar site. The fall chum salmon passage estimate was subsequently expanded to a total of 14,320 to include fish that may have passed after operations ceased. Both sonar systems functioned well with minimal interruptions to operation. The range of ensonification was considered adequate for most fish that migrated upstream. A beach seine sample fishery was conducted to collect age, sex, and length information; however, few fish were caught because of low salmon passage.

Keywords: fall chum salmon, *Oncorhynchus keta*, dual-frequency identification sonar DIDSON, adaptive resolution imaging sonar ARIS, Sheenjek River, Yukon River

INTRODUCTION

Five species of anadromous Pacific salmon *Oncorhynchus* spp. are found in the Yukon River drainage. Chum salmon *O. keta* are the most abundant and occur in genetically distinct summer and fall runs (Seeb et al. 1995; Wilmot et al. 1992). Fall chum salmon are larger, spawn later, and are less abundant than summer chum salmon. Spawning occurs in upper portions of the drainage in spring-fed streams, which usually remain ice-free during the winter (Buklis and Barton 1984). Major fall chum salmon spawning areas occur within the Tanana, T'eedriinjik (formerly designated as the Chandalar), and Porcupine River systems, as well as portions of the upper Yukon River in Canada (Figure 1). The Sheenjek River is one of the most important producers of fall chum salmon in the Yukon River drainage (Dunbar 2012). Located above the Arctic Circle, it heads in glacial ice fields of the Romanzof Mountains, a northern extension of the Brooks Range, and flows southward approximately 320 km to the Porcupine River (Figure 2).

Historically, the Sheenjek River has been one of the most intensely monitored fall chum salmon spawning streams in the Yukon River drainage. Escapement observations date back to 1960 when the United States Fish and Wildlife Service reported fall chum salmon spawning in September. Between 1974 and 1981, escapement observations in the Sheenjek River were limited to aerial surveys flown in late September and early October (Barton 1984). Beginning in 1981, escapements were monitored using Bendix fixed-location, single-beam, side-looking sonar systems (Dunbar 2004). However, an early segment of the fall chum salmon run was not estimated before 1991 because the project typically began around August 25, after a portion of the run had passed. Beginning in 1991, the project start date was adjusted to begin about 2 weeks earlier to include the initial portion of the run. The sonar-estimated escapements for 1986 through 1990 have been expanded to include estimated early fish passage (Barton 1995). Termination of sonar counting was consistent between 1981 and 2012, averaging September 24, except in 2000 when the project was terminated early because of extremely low water (Barton 2002).

The Bendix single-beam sonar equipment functioned well, but the manufacturer ceased production and support in the mid-1990s. In 2000 and 2002, a Hydroacoustic Technology, Incorporated (HTI) model 241 split-beam echosounder was deployed alongside the existing single-beam sonar and produced comparable results (Dunbar 2004). In 2003 and 2004, the Bendix was replaced with the split-beam sonar system exclusively to enumerate chum salmon in the Sheenjek River.

In 2002, ADF&G began testing dual-frequency identification sonar (DIDSON), manufactured by Sound Metrics Corporation, for counting salmon in small rivers. This system appeared to be more accurate and easier to use, including the ability to operate across substrate profiles that were unacceptable for single-beam or split-beam systems (Maxwell and Gove 2004). The uneven

substrate on the left bank of the Sheenjek River was selected as an ideal candidate for experimenting with this system.

Historically, because of unfavorable conditions for transducer and weir placement on the left bank, only the right bank of the Sheenjek River had been used to estimate fall chum salmon passage, except for 1985 through 1987 when single-beam sonar was tested on the left bank. Drift gillnet studies in the early 1980s suggested that the distribution of migrating fall chum salmon was primarily concentrated on the right bank, with a small but unknown proportion passing on the left bank (Barton 1985).

In 2003, a DIDSON was deployed on the previously unmonitored left bank. Using DIDSON data, it was estimated that approximately 33% of the fish were migrating up the left bank (Dunbar 2006). Given this surprisingly large number, it was proposed that DIDSON be deployed on both banks in the future. In 2004 and 2005, DIDSON and HTI split-beam sonars were deployed side-by-side on the right bank and found that DIDSON estimates were 20% higher than the split-beam estimates (Dunbar and Pfisterer 2009). The project used DIDSON from 2005 until the project was discontinued after the 2012 field season because of budgetary constraints. The project was restarted in 2022 and utilizes a combination of DIDSON on the right bank and ARIS (adaptive resolution imaging sonar) on the unstable left bank (Table 1), which provides improved image resolution and control over range¹.

From 1992 through 2000, the Sheenjek River biological escapement goal (BEG) was set at 64,000 fall chum salmon. This goal was based upon aerial survey and hydroacoustic data collected between 1974 and 1990 (Buklis 1993). In 2001, ADF&G completed a review of the escapement goals for Yukon River fall chum salmon stocks, including the Sheenjek River. Based on this review of long-term escapement, catch, and age composition data, the BEG for the Sheenjek River was given a range of 50,000 to 104,000 fall chum salmon on the right bank (Eggers 2001). The goal was removed in 2015 because the Sheenjek sonar assessment project had been terminated for 3 years with no plans for restarting operations (Conitz et al. 2015).

In 2022, ADF&G received increased funding for Yukon salmon research, and given its long historical dataset, the Sheenjek River sonar project was one of the prioritized projects (Lozori 2022). Given the 10-year gap in the dataset, it will probably be several years before an escapement goal can be reestablished because the system's productivity may have changed over time.

OBJECTIVES

The goal of this project in 2024 was to provide daily inseason estimates of adult fall chum salmon escapement into the Sheenjek River. Primary objectives were as follows:

1. Estimate daily fall chum salmon passage in the Sheenjek River using DIDSON and ARIS sonar; and
2. Collect biological samples necessary to characterize age and sex composition of the spawning fall chum salmon population from a minimum of 30–35 vertebrae samples per week up to 180 for the season, such that simultaneous 95% confidence intervals of age composition are no wider than 0.20 ($\alpha = 0.05$ and $d = 0.10$), assuming a 20% unreadable vertebrae rate.

¹ ADF&G (Alaska Department of Fish and Game). 2024. Alaska Fisheries sonar, sonar tools. <https://www.adfg.alaska.gov/index.cfm?adfg=sonar.didson> (accessed November 18, 2024).

Secondary objectives were as follows:

1. Collect selected climate and hydrologic data daily at the project site.

METHODS

STUDY AREA

The site is located approximately 10 km upstream from the mouth of the Sheenjek River at the historical project location (Figure 2). Although created by glaciers, the Sheenjek River has numerous clearwater tributaries. Water clarity in the lower river is somewhat unpredictable, but it is generally the clearest during periods of low water. Historically, the water level begins to drop in late August or early September. Upwelling groundwater makes up a significant portion of the river flow volume, especially in winter. It is in these spring areas that fall chum salmon spawn, particularly within the lower 160 km.

SONAR EQUIPMENT AND OPERATION

A long-range DIDSON operating at a frequency of 1.2 MHz (high-frequency option using 48 beams) was deployed on the right bank, and an ARIS Explorer 1200 operating at a frequency of 1.2 MHz (high frequency option using 48 beams) was deployed on the left bank (Table 2). The right bank had a gradual slope of approximately 2°. For this reason, a concentrator lens with a vertical beam width of approximately 2° was used to reduce surface and bottom reverberation. The DIDSON was controlled with a laptop computer running DIDSON software on the right bank. A wireless access point connected to a directional antenna transferred data from the left bank ARIS to the controlling laptop running ARIS software on the right bank. External hard drives connected to each laptop were used to store data (Figure 3).

Transducers were mounted on adjustable aluminum pods and were aimed using manual crank-style rotators with threaded vertical rods, which tilted the transducers vertically up or down (Figure 4). Each transducer was placed offshore in a fixed location, and the beams were directed perpendicular to current flow at a depth of approximately 1 m. Because the slope of the river bottom differed substantially between banks, the DIDSON was located approximately 10 m from shore on the right bank, and the ARIS was approximately 2 m from shore on the left bank, depending on water level (Figure 5). Operators adjusted the pan and tilt by viewing the video-like acoustic image and relaying aiming instructions to a technician via handheld 2-way radios. The wide axis of each beam was oriented horizontally and positioned close to the river bottom to maximize the residence time of targets in the beam. The right bank ensonified a range of 20 m, starting at 0.83 m from the DIDSON and ending at 20.83 m. The left bank ensonified a range of 14.55 m, starting at 0.88 m from the ARIS and ending at 15.43 m (Table 2; Figure 5). The left bank end range was reduced from an initial 20 m down to 15 m because of the irregular substrate on that bank, which was responsible for beam obstructions and poor image quality beyond 15 m. The width of the river at this location varies between 50 m and 90 m, depending on river stage, meaning there is no overlap in the counting ranges between the 2 banks. Daily visual inspections of the sonar pods and images confirmed proper placement and orientation of the transducers and alerted operators as to when the pods needed to be repositioned to accommodate changing water levels.

A weir was constructed shoreward from the transducer on the right bank to prevent upstream salmon passage inshore of the transducer. The weir was constructed of 1.2 m high orange safety

fencing attached to 2.5 m metal “T” posts. The weir was positioned to guide fish beyond the near field of the sonar transducer and extended from shore outward 1 to 3 m beyond the DIDSON (Figure 6). Whenever the transducer was relocated because of rising or falling water levels, the beam was re-aimed to ensure proper ensonification, and the weir was repositioned as appropriate. Installation of a weir on the left bank was not feasible due to deep water and floating debris close to shore.

SONAR DATA PROCESSING AND PASSAGE ESTIMATION

Acoustic sampling was conducted on both banks starting at the top of each hour for 30 minutes, 24 hours per day, and 7 days per week, except for short periods when generators were serviced or adjustments were made to the sonars. During assigned shifts, operators opened recorded files and marked each upstream fish track using Echotastic², an echogram viewer program developed by ADF&G. All upstream fish tracks were counted except for small fish (<400 mm), which were assumed to be nonsalmon species. Fish lengths were measured using Echotastic marking tools but were not recorded. At the beginning of the season, when fish passage was low, most fish were measured, which trained technicians to estimate length visually. As technicians became more proficient with estimating length, fish were measured at the technicians’ discretion. The upstream direction of travel was verified using the Echotastic video feature, which displayed the raw acoustic fish images. The 30-minute counts were saved as text files and recorded on a paper count form.

The daily passage ($\hat{y}$) for stratum (s) on day (d) was calculated by averaging the hourly passage rates for the hours sampled and then multiplying as follows:

$$\hat{y}_{ds} = 24 \cdot \frac{\sum_{p=1}^n \frac{y_{dsp}}{h_{dsp}}}{n_{ds}}, \quad (1)$$

where h_{dsp} is the fraction of the hour sampled on day (d), stratum (s), period (hour) p ; y_{dsp} is the count for the same sample; and n_{ds} is the number of samples on day (d) for stratum (s).

Treating the autocorrelated sonar counts as a simple random sample would yield an underestimate of the variance of the total. To accommodate these data characteristics, the data were sampled systematically with a variance estimator based on the squared differences of successive observations (Wolter 1985). The variance for the passage estimate for stratum (s) on day (d) was estimated as:

$$\hat{v}_{y_{ds}} = 24^2 \frac{1-f_{ds}}{n_{ds}} \frac{\sum_{p=2}^{n_{ds}} \left(\frac{y_{dsp}}{h_{dsp}} - \frac{y_{ds,p-1}}{h_{ds,p-1}} \right)^2}{2(n_{ds}-1)}. \quad (2)$$

Where n_{ds} is the number of samples in the day (24), f_{ds} is the fraction of the day sampled ($12/24 = 0.5$), and y_{dsp} is the hourly count for day (d) in stratum (s) for sample (p). Because the passage estimates are assumed to be independent between strata and among days, the total variance was estimated as the sum of the daily variances:

² Echotastic software. 2023. Version 3.0.14. Developed by Carl Pfisterer, ADF&G Division of Commercial Fisheries. (internal use only).

$$\hat{V}ar(\hat{y}) = \sum_d \sum_s \hat{V}ar(\hat{y}_{ds}). \quad (3)$$

MISSING DATA

Estimating daily passage by multiplying the average hourly passage rates by 24 (Equation 1) compensates for missing data (either shortened or missing periods within a day) and is reflected in the variance (Equation 2) by reducing the number of samples and the fraction of the day sampled. Normally, if one or multiple days are missed, the relationship of daily passage between banks will be assessed by linear regression using the observed passage from the previous days for each bank. If the regression is significant ($p < 0.05$), the linear regression equation of the line will then be used to calculate the missing passage for each missing day (d):

$$\hat{y}_{ds} = a + bx_d, \quad (4)$$

where a and b are the regression coefficients, x equals the passage for day (d) on the opposite bank, and $\hat{y}_{ds}$ is the estimated passage for missing day (d) for bank (s).

If the regression of daily passage by bank is not significant or when both banks are inoperable, daily passage is interpolated by averaging passage estimates from days before and after the missing day(s) as follows:

$$\hat{y}_{ds} = (1/n \sum_{i=1}^n x_{is}) \begin{cases} d = 1, n = 4 \\ d = 2, n = 6 \\ d = 3, n = 8 \end{cases}, \quad (5)$$

where (d) is the number of missed days, n is the number of days used for interpolation (half before and half after the missing day[s]), and x_i is the passage for each day (i).

Because project operations ceased prior to the end of the fall chum salmon migration, the estimate for each bank was expanded separately through October 9 using a second-order polynomial equation:

$$\hat{y}_{is} = \frac{L_s}{d^2} (x_i - d)^2, \quad (6)$$

where y_i is the daily passage estimate for each bank on the i th day of expansion, L is the count on the last day of sonar operation, d is the total number of days expanded (October 9–September 26 = 14 days), and x_i is the day number being estimated. Daily passage estimates for each bank were then summed for a total daily passage estimate (Table 3). The final date of October 9 for postseason expansion is based on what is considered the most probable run timing scenario derived from historical data (1996–2006) using a 15-day lag time correlated to the end of the run at Rampart Rapids test fishery project (B. M. Borba, Commercial Fisheries Biologist, ADF&G, Fairbanks, November 2024; personal communication).

SPATIAL AND TEMPORAL DISTRIBUTIONS

Spatial distribution of fall chum salmon was examined in season by binning marked fish by distance from the transducer. Two plots were produced for each bank for each day. The first plot displayed the range frequency distribution of fish marks for the most recent day, and the second plot displayed the range distribution of fish marks for the entire season. Comparing the daily to

the season's distributions can be useful in identifying issues with transducer aim or changes in fish behavior.

Diel patterns of migration were examined postseason by binning fish counts by the hour in which samples occurred. Histograms were generated using the binned hourly data to look for temporal patterns of fish passage. Both spatial and temporal distributions were produced using the software package R³.

AGE, SEX, AND LENGTH SAMPLING

Regionwide standards have been set for the sample size needed to describe the age composition of a salmon population. These standards apply to the period or stratum in which the sample is collected. These goals are based on a 0.05 probability (precision) of not having the true age proportion (p_i) within the interval $p_i \pm 0.10$ for all i ages (accuracy).

Vertebrae collections are the preferred method of aging Yukon River fall chum salmon near their natal streams (Clark 1987). As described in Bromaghin (1993), a sample size of 150 chum salmon is needed, assuming 2 major age classes with minor ages pooled, and no unreadable vertebrae. Allowing for 20% unreadable vertebrae, the Sheenjek River sample size goal was $n = 30$ chum salmon per week, up to a maximum of $n = 180$ for the season.

A beach seine was periodically fished at the sonar site to collect adult salmon for age and sex composition. The beach seine (6.35 cm stretch measure) was 30 m in length by 55 meshes deep (~3 m) and appropriate for collecting a representative sample. Any fall chum salmon that were collected with the beach seine were enumerated by sex using external and internal characteristics and measured to the nearest 1 mm, from the middle of the eye to the tail fork. Additionally, 3 vertebrae were taken from each fish and given to ADF&G research staff in Fairbanks for age determination.

CLIMATIC AND HYDROLOGIC OBSERVATIONS

Climatic and hydrologic data were collected at approximately 1800 hours each day at the sonar site. River depth was monitored using a staff gauge marked in 1 cm increments. Change in water depth was presented as negative or positive increments from the initial reading of 0 cm. Air temperature, wind velocity, and direction were measured daily with a Kestrel 2000 handheld weather meter. Water temperature was measured using a HOBO U22 data logger, which electronically recorded the temperature every hour, on the hour, for the duration of the project. Subjective notes about cloud cover, precipitation, and water clarity were also recorded.

RESULTS AND DISCUSSION

FALL CHUM SALMON ESTIMATION

Both banks were ensounded on August 5, and the sonar equipment functioned well this season with no major interruptions. On August 26, a bear destroyed the wireless antenna cable on the left bank, making wireless communication to the right bank's controlling computer impossible. A small tent was set up on the left bank for the computer, and ARIS files were processed there, then transferred to the right bank with a portable external drive. Normal sonar operations occurred on

³ The R Project for statistical computing. R version 4.2.1 (Funny-Looking Kid). [released June 23, 2022]. Available for download from <http://www.r-project.org/>

both banks through September 25. The cumulative estimated passage for both banks was 11,803 (SE229) fall chum salmon (Table 3).

Daily sonar passage estimates were expanded in season for sampling time missed due to generator and sonar maintenance, short sonar file times, and days when the sonar only operated for a partial day (i.e., project startup and breakdown). On the left bank, 3,127.2 minutes were missed, and on the right bank, 2,026.9 minutes were missed for a combination of these reasons, which resulted in a total of 916 fish being added to the daily sonar estimates (Table 4). In addition, the sonar-estimated passage was extrapolated postseason to account for fish that passed after termination of the project. Postseason expansions estimated 2,517 fish passed after sonar operations ceased. The total combined inseason and postseason expanded estimates were 3,432 additional fall chum salmon.

The total fall chum salmon passage estimate was 14,320 from August 5 through October 9 (Table 3). Expanded estimates accounted for 18% of the total passage estimate. The first quarter point occurred on September 7, the midpoint on September 14, and the third quarter point on September 23 (Table 3). The peak daily passage of 765 fall chum salmon occurred on September 10, and 602 fall chum salmon passed on September 25, the last day of sonar operation. The objective of estimating fall chum salmon passage in the Sheenjek River was met.

SPATIAL AND TEMPORAL DISTRIBUTION

Fish passage was spread throughout the counting range this season. Approximately 95% of fish targets were detected within 12 m of the transducer on the left bank and 19 m on the right bank (Figure 7). Approximately 59% of fall chum salmon passage occurred on the left bank (Table 3).

The left bank exhibited a slight temporal pattern of fish passage. The lowest fish passage occurred at 1200. The right bank displayed a more evident diurnal pattern with an increase from approximately 2100 hours to 0500 hours. When both banks were combined, passage was highest at 2200 and lowest at 1300 (Figure 8).

FALL CHUM AGE AND SEX COMPOSITION

Beach seining was conducted intermittently from August 23 to September 24, but was unsuccessful due to low fall chum salmon passage, and only 4 fish were caught. The objective of collecting a minimum of 30 samples per week was not met. Because the sample size was inadequate, age, sex, and length (ASL) analysis was not completed.

CLIMATIC AND HYDROLOGIC OBSERVATIONS

The objective of monitoring weather and water parameters daily at the project site was met in 2024. Water levels generally decreased over the course of the season (Figure 9). Water levels fluctuated somewhat during the last half of August but never reached the initial level recorded at the project start date. Water temperatures ranged from a high of 16.5°C on August 8 to a low of 4.9°C on September 25 (Figure 10). Air temperatures ranged from a high of 31.0°C on August 6 to a low of 5.4°C on September 23 (Table 5).

ACKNOWLEDGMENTS

The authors wish to acknowledge Alexis Bobbitt and Jessie Harlan for collecting most of the data presented in this report. In addition, the authors would like to thank Owen Boyle, Madison Hardwig, Mark Jackson, Ryan Morrill, and Keela Wigglesworth for providing logistical support.

Carl Pfisterer (ADF&G AYK Regional Sonar Coordinator), and Jim Jasper (ADF&G Division of Commercial Fisheries Biometrician) provided project oversight, technical support, and review of this report. This investigation was financed by the U.S./Canada Treaty Implementation funds administered by the U.S. Fish and Wildlife Service, Agreement Award F18AP00851.

REFERENCES CITED

- Barton, L. H. 1984. A catalog of Yukon River salmon spawning escapement surveys. Alaska Department of Fish and Game, Division of Commercial Fisheries, Technical Data Report No. 121, Juneau.
- Barton, L. H. 1985. Enumeration of fall chum salmon by side-scanning sonar in the Sheenjek River in 1984. Alaska Department of Fish and Game, Division of Commercial Fisheries, AYK Region, Yukon Salmon Escapement Report No. 25, Fairbanks.
- Barton, L. H. 1995. Sonar enumeration of fall chum salmon on the Sheenjek River, 1988-1992. Alaska Department of Fish and Game, Commercial Fisheries Management and Development Division, Technical Fishery Report 95-06, Juneau.
- Barton, L. H. 2002. Sonar estimation of fall chum salmon abundance in the Sheenjek River, 2000. Alaska Department of Fish and Game, Division of Commercial Fisheries, Regional Information Report No. 3A02-26, Anchorage.
- Bromaghin, J. F. 1993. Sample size determination for interval estimation of multinomial probabilities. *The American Statistician* 47(3):203-206.
- Buklis, L. S., and L.H. Barton. 1984. Yukon River fall chum salmon biology and stock status. Alaska Department of Fish and Game, Division of Commercial Fisheries, Informational Leaflet No. 239, Juneau.
- Buklis, L. S. 1993. Documentation of Arctic-Yukon-Kuskokwim region salmon escapement goals in effect as of the 1992 fishing season. Alaska Department of Fish and Game, Division of Commercial Fisheries, Regional Information Report No. 3A93-03, Anchorage.
- Clark, R. A. 1987. Sources of variability in three aging structures for Yukon River fall chum salmon (*Oncorhynchus keta* Walbaum) escapement samples. Pages 111-120 [In] Rigby, P., editor. Proceedings of the 1987 Northeast Pacific pink and chum salmon workshop, Anchorage, Alaska, February 18-20, 1987. Alaska Department of Fish and Game, Juneau.
- Conitz, J. M., K. G. Howard, and M. J. Evenson. 2015. Escapement goal recommendations for select Arctic-Yukon-Kuskokwim Region salmon stocks, 2016. Alaska Department of Fish and Game, Fishery Manuscript No. 15-08, Anchorage.
- Dunbar, R. D. 2004. Sonar estimation of fall chum salmon abundance in the Sheenjek River, 2002. Alaska Department of Fish and Game, Division of Commercial Fisheries, Regional Information Report No. 3A04-10, Anchorage.
- Dunbar, R. D. 2006. Sonar estimation of fall chum salmon abundance in the Sheenjek River, 2003. Alaska Department of Fish and Game, Fishery Data Series No. 06-65, Anchorage.
- Dunbar, R. D. 2012. Sonar estimation of fall chum salmon abundance in the Sheenjek River, 2011. Alaska Department of Fish and Game, Fishery Data Series No. 12-48, Anchorage.
- Dunbar, R. D., and C. T. Pfisterer. 2009. Sonar estimation of fall chum salmon abundance in the Sheenjek River, 2005. Alaska Department of Fish and Game, Fishery Data Series No. 09-01, Anchorage.
- Eggers, D. M. 2001. Biological escapement goals for Yukon River fall chum salmon. Alaska Department of Fish and Game, Division of Commercial Fisheries, Regional Information Report No. 3A-01-10, Anchorage.
- Lozori, J. D. 2022. Sonar estimation of fall chum salmon abundance in the Sheenjek River, 2022. Alaska Department of Fish and Game, Division of Commercial Fisheries, Regional Operational Plan No. ROP.CF.3A.2022.01, Anchorage.
- Maxwell, S. L., and N. E. Gove. 2004. The feasibility of estimating migrating salmon passage in turbid rivers using a dual frequency identification sonar (DIDSON), 2002. Alaska Department of Fish and Game, Division of Commercial Fisheries, Regional Information Report No. 2A04-05, Anchorage.

REFERENCES CITED (Continued)

- Seeb, L. W., P. A. Crane, and R. B. Gates. 1995. Progress report of genetic studies of Pacific Rim chum salmon and preliminary analysis of the 1993 and 1994 South Unimak June fisheries. Alaska Department of Fish and Game, Commercial Fisheries Management and Development Division, Regional Information Report No. 5J95-07, Juneau.
- Wilmot, R. L., R. J. Everett, W. J. Spearman, and R. Baccus. 1992. Genetic stock identification of Yukon River chum and Chinook salmon 1987 to 1990. Progress Report, U.S. Fish and Wildlife Service, Anchorage.
- Wolter, K. M. 1985. Introduction to variance estimation. Springer-Verlag, New York.

TABLES AND FIGURES

Table 1.—Annual passage estimates and passage timing for fall chum salmon runs at the Sheenjek River sonar project, 2003–2012 and 2022–2024.

Year	Start date	End date	Project duration	Sonar estimate	Expanded estimate ^a
2003	8/09	9/26	49	38,321 ^b	44,047
2004	8/08	9/25	49	37,878	ND
2005	8/10	9/24	46	438,253 ^b	561,863
2006	8/09	9/24	47	160,178	175,620
2007	8/11	9/24	45	65,435	69,183
2008	8/09	9/24	47	42,842	50,353
2009	8/15	9/24	41	46,926	54,126
2010	8/18	9/24	38	22,053	24,669
2011	8/08	9/24	48	81,980	97,976
2012	8/09	9/24	47	86,192	104,702
2022	8/08	9/26	50	12,356	13,957
2023	8/06	9/25	51	13,371	15,958
2024	8/05	9/25	52	11,803	14,320
Mean	8/10	9/25	47	81,353	102,231

Note: The project did not operate between 2013 and 2021. ND indicates no data were available.

^a Sonar-estimated escapement was expanded to include fish passing after sonar operations ended.

^b Sonar estimate is based on right-bank sonar operations only.

Table 2.–Technical specifications for dual-frequency identification sonar (DIDSON) and adaptive resolution imaging sonar (ARIS) at the Sheenjek River sonar project, 2024.

Setting	DIDSON	ARIS
Mode	High frequency	High frequency
Frequency (MHz)	1.20	1.20
Number of beams	48	48
Horizontal field of view (angular degrees)	29	28
Vertical beam width (angular degrees)	2	14
Start range (m)	0.83	0.88
End range (m)	20.83	15.43
Frame rate (per sec)	6	6
Duration (min)	30	30

Table 3.–Fall chum salmon daily and cumulative passage estimates at the Sheenjek River sonar project, 2024.

Date	Left bank	Right bank	Daily total	Cumulative	
				Estimate	Proportion
8/05	12	35	47	47	0.003
8/06	20	50	70	117	0.008
8/07	16	34	50	167	0.012
8/08	22	40	62	229	0.016
8/09	15	44	59	288	0.020
8/10	18	18	36	324	0.023
8/11	4	16	20	344	0.024
8/12	12	32	44	388	0.027
8/13	4	20	24	412	0.029
8/14	2	13	15	427	0.030
8/15	10	12	22	449	0.031
8/16	15	24	39	488	0.034
8/17	30	24	54	542	0.038
8/18	14	18	32	574	0.040
8/19	20	21	41	615	0.043
8/20	38	12	50	665	0.046
8/21	26	24	50	715	0.050
8/22	20	28	48	763	0.053
8/23	26	23	49	812	0.057
8/24	42	32	74	886	0.062
8/25	42	38	80	966	0.067
8/26	59	29	88	1,054	0.074
8/27	30	34	64	1,118	0.078
8/28	64	40	104	1,222	0.085
8/29	40	52	92	1,314	0.092
8/30	36	63	99	1,413	0.099
8/31	36	13	49	1,462	0.102
9/01	82	44	126	1,588	0.111
9/02	30	44	74	1,662	0.116
9/03	78	50	128	1,790	0.125
9/04	171	70	241	2,031	0.142
9/05	341	104	445	2,476	0.173
9/06	334	140	474	2,950	0.206
9/07 ^a	433	186	619	3,569	0.249
9/08	386	164	550	4,119	0.288
9/09	300	112	412	4,531	0.316
9/10	607	158	765	5,296	0.370
9/11	466	245	711	6,007	0.419
9/12	247	94	341	6,348	0.443

-continued-

Table 3.—Page 2 of 2.

Date	Left bank	Right bank	Daily total	Cumulative	
				Estimate	Proportion
9/13	356	206	562	6,910	0.483
9/14 ^b	232	154	386	7,296	0.509
9/15	154	168	322	7,618	0.532
9/16	126	130	256	7,874	0.550
9/17	326	134	460	8,334	0.582
9/18	288	106	394	8,728	0.609
9/19	250	174	424	9,152	0.639
9/20	200	122	322	9,474	0.662
9/21	242	121	363	9,837	0.687
9/22	296	142	438	10,275	0.718
9/23 ^c	228	208	436	10,711	0.748
9/24	212	278	490	11,201	0.782
9/25 ^d	282	320	602	11,803	0.824
9/26 ^e	243	276	519	12,322	0.860
9/27 ^e	207	235	442	12,764	0.891
9/28 ^e	174	198	372	13,136	0.917
9/29 ^e	144	163	307	13,443	0.939
9/30 ^e	117	132	249	13,692	0.956
10/01 ^e	92	104	196	13,888	0.970
10/02 ^e	71	80	151	14,039	0.980
10/03 ^e	52	59	111	14,150	0.988
10/04 ^e	36	41	77	14,227	0.994
10/05 ^e	23	26	49	14,276	0.997
10/06 ^e	13	15	28	14,304	0.999
10/07 ^e	6	7	13	14,317	1.000
10/08 ^e	1	2	3	14,320	1.000
10/09 ^e	0	0	0	14,320	1.000
Total	8,519	5,801	14,320	NA	NA
SE	NA	NA	229	NA	NA

Note: The large box indicates the central 50% of the fall chum salmon run.

^a First quarter point.

^b Midpoint.

^c Third quarter point.

^d Last day of operation.

^e Postseason extrapolated estimate.

Table 4.–Sampling time missed, and the resulting number of fish added to the estimate at the Sheenjek River sonar project, 2024.

Date	Left bank		Right bank	
	Minutes	Fish	Minutes	Fish
8/05	480.2	8.0	390.2	18.9
8/06	0.8	0.0	0.5	0.0
8/07	0.7	0.0	0.5	0.0
8/08	60.8	1.8	0.5	0.0
8/09	60.8	1.3	0.5	0.0
8/10	0.8	0.0	0.5	0.0
8/11	0.8	0.0	0.5	0.0
8/12	133.8	2.2	199.5	8.9
8/13	5.5	0.0	0.5	0.0
8/14	0.9	0.0	60.4	1.1
8/15	0.7	0.0	0.5	0.0
8/16	331.6	6.8	300.3	10.0
8/17	0.9	0.0	0.5	0.0
8/18	1.0	0.0	0.5	0.0
8/19	0.8	0.0	30.5	0.9
8/20	0.8	0.0	0.5	0.0
8/21	0.8	0.0	0.5	0.0
8/22	0.8	0.0	0.5	0.0
8/23	0.8	0.0	30.5	1.0
8/24	0.8	0.0	0.5	0.0
8/25	0.8	0.0	30.5	1.6
8/26	60.8	5.0	30.5	1.2
8/27	486.3	20.3	0.5	0.0
8/28	0.8	0.1	30.5	1.7
8/29	0.8	0.0	60.4	4.4
8/30	0.8	0.0	30.5	2.7
8/31	0.7	0.0	30.5	0.5
9/01	0.8	0.1	0.5	0.0
9/02	0.9	0.0	30.5	1.9
9/03	240.6	26.1	0.5	0.0
9/04	0.9	0.2	0.5	0.0
9/05	33.6	15.9	0.5	0.1
9/06	1.0	0.4	60.4	11.7
9/07	0.9	0.5	0.5	0.1
9/08	0.8	0.4	0.5	0.1
9/09	0.8	0.3	0.5	0.1
9/10	0.8	0.6	0.5	0.1
9/11	240.6	155.5	94.3	32.1
9/12	451.1	154.5	0.5	0.1
9/13	0.8	0.4	0.5	0.1
9/14	0.8	0.2	0.5	0.1
9/15	0.7	0.2	0.5	0.1
9/16	0.8	0.1	0.5	0.1

-continued-

Table 4.–Page 2 of 2.

Date	Left bank		Right bank	
	Minutes	Fish	Minutes	Fish
9/17	0.8	0.4	0.5	0.1
9/18	0.7	0.3	0.5	0.1
9/19	0.8	0.3	0.5	0.1
9/20	0.7	0.2	0.5	0.1
9/21	0.7	0.2	150.6	25.4
9/22	0.8	0.3	0.5	0.1
9/23	0.7	0.2	90.4	26.1
9/24	0.8	0.2	0.5	0.2
9/25	510.3	199.5	360.2	160.2
Total	3,127.2	603.4	2,026.9	312.3

Note: Reasons for missed sampling time included generator and sonar maintenance, short sonar file times, and days when the sonar did not operate for a full day (i.e., project startup and shutdown).

Table 5.—Climatic observations recorded daily at 1800 hours at the Sheenjek River sonar project site, 2024.

Date	Precipitation (code) ^a	Wind		Sky (code) ^c	Air temperature (°C)
		Direction ^b	Velocity (kph)		
8/05	A	E	3.2	C	30.0
8/06	A	E	1.8	C	31.0
8/07	A	W	2.1	S	29.7
8/08	B	S	1.1	O	21.0
8/09	B	W	4.8	S	20.0
8/10	A	W	3.7	S	17.2
8/11	B	S	5.3	O	14.4
8/12	B	S	7.6	B	17.5
8/13	A	S	8.5	B	17.2
8/14	A	W	10.3	S	19.5
8/15	C	E	2.3	B	21.1
8/16	B	S	10.1	O	13.1
8/17	B	E	2.4	O	14.2
8/18	B	E	6.1	O	19.8
8/19	S	SW	3.9	B	17.2
8/20	A	SW	7.6	C	16.0
8/21	A	S	2.7	O	13.6
8/22	B	SW	13.2	O	12.1
8/23	A	S	2.6	B	14.3
8/24	B	SE	2.4	B	12.4
8/25	A	NE	1.4	C	16.2
8/26	A	SE	2.1	B	17.3
8/27	B	E	1.3	B	17.9
8/28	A	SW	2.7	B	19.2
8/29	B	SW	3.5	O	14.3
8/30	A	NE	1.3	B	11.9
8/31	A	N	2.6	C	15.6
9/01	A	NE	4.0	C	13.5
9/02	A	SW	1.6	C	13.2
9/03	A	SW	2.3	B	15.3
9/04	A	E	2.1	B	16.0
9/05	A	W	1.6	S	20.2
9/06	A	W	2.6	B	19.9
9/07	A	SW	2.7	C	18.7
9/08	A	SW	4.5	B	13.0
9/09	A	SW	3.1	S	13.1
9/10	A	SW	2.1	B	15.5
9/11	B	SE	2.4	B	11.8
9/12	A	NE	10.0	S	14.4
9/13	B	NE	1.1	O	11.5
9/14	A	E	1.9	B	12.1
9/15	C	SE	3.4	O	9.3
9/16	A	W	2.3	B	13.1
9/17	A	E	2.6	B	11.8

-continued-

Table 5.–Page 2 of 2.

Date	Precipitation (code) ^a	Wind		Sky (code) ^c	Air temperature (°C)
		Direction ^b	Velocity (kph)		
9/18	B	W	2.3	B	11.9
9/19	A	S	2.4	B	9.1
9/20	A	SW	2.1	B	9.0
9/21	B	NE	2.1	B	9.9
9/22	B	NE	5.1	B	6.4
9/23	B	NE	10.5	O	5.4
9/24	B	NE	6.0	O	8.4

^a Precipitation codes for the preceding 24-hour period: A = none; B = intermittent rain; C = continuous rain; D = snow and rain mixed; E = light snowfall; F = continuous snowfall; G = thunderstorm with or without precipitation.

^b Wind direction code: N = North; S = South; E = East; W = West; V = Variable; NA = Not applicable (no wind).

^c Instantaneous cloud cover code: C = clear, cloud cover <10% of sky; S = cloud cover <60% of sky; B = cloud cover 60–90% of sky; O = overcast (100%); F = fog, thick haze, or smoke.

Figure 1.—Alaska portion of the Yukon River drainage showing communities and fishing districts.

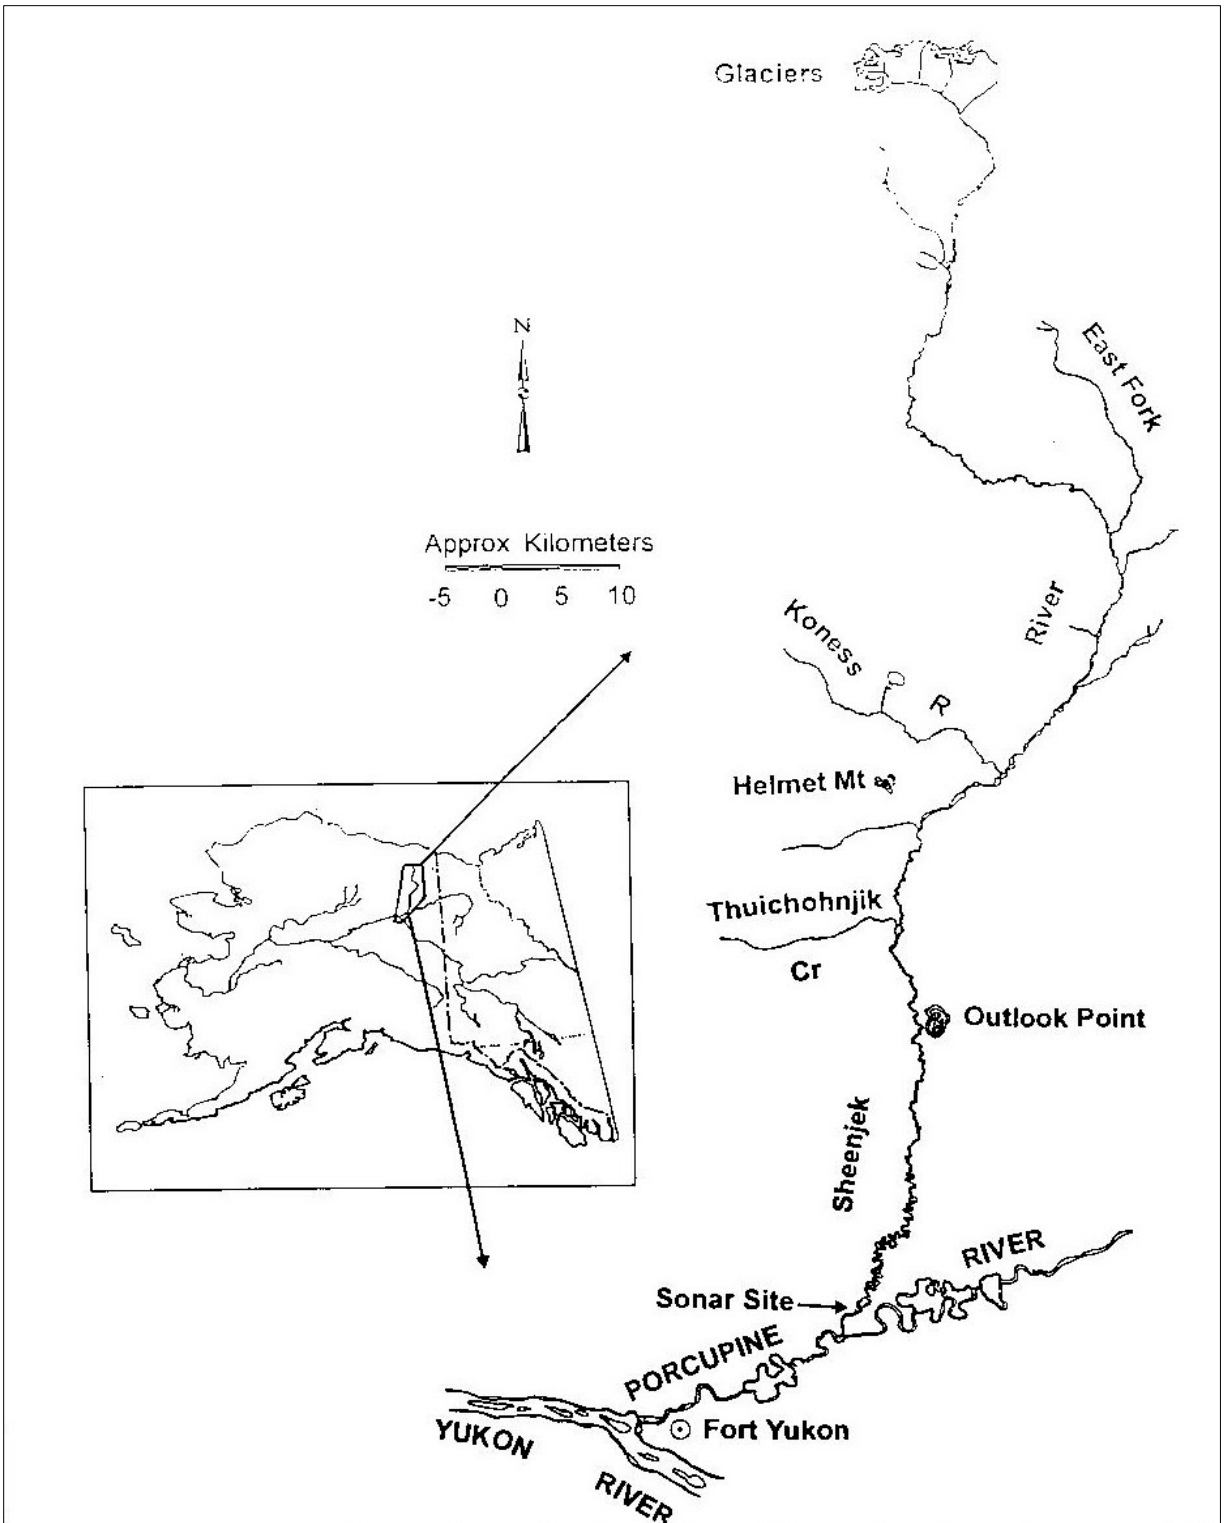


Figure 2.—The Sheenjek River drainage.

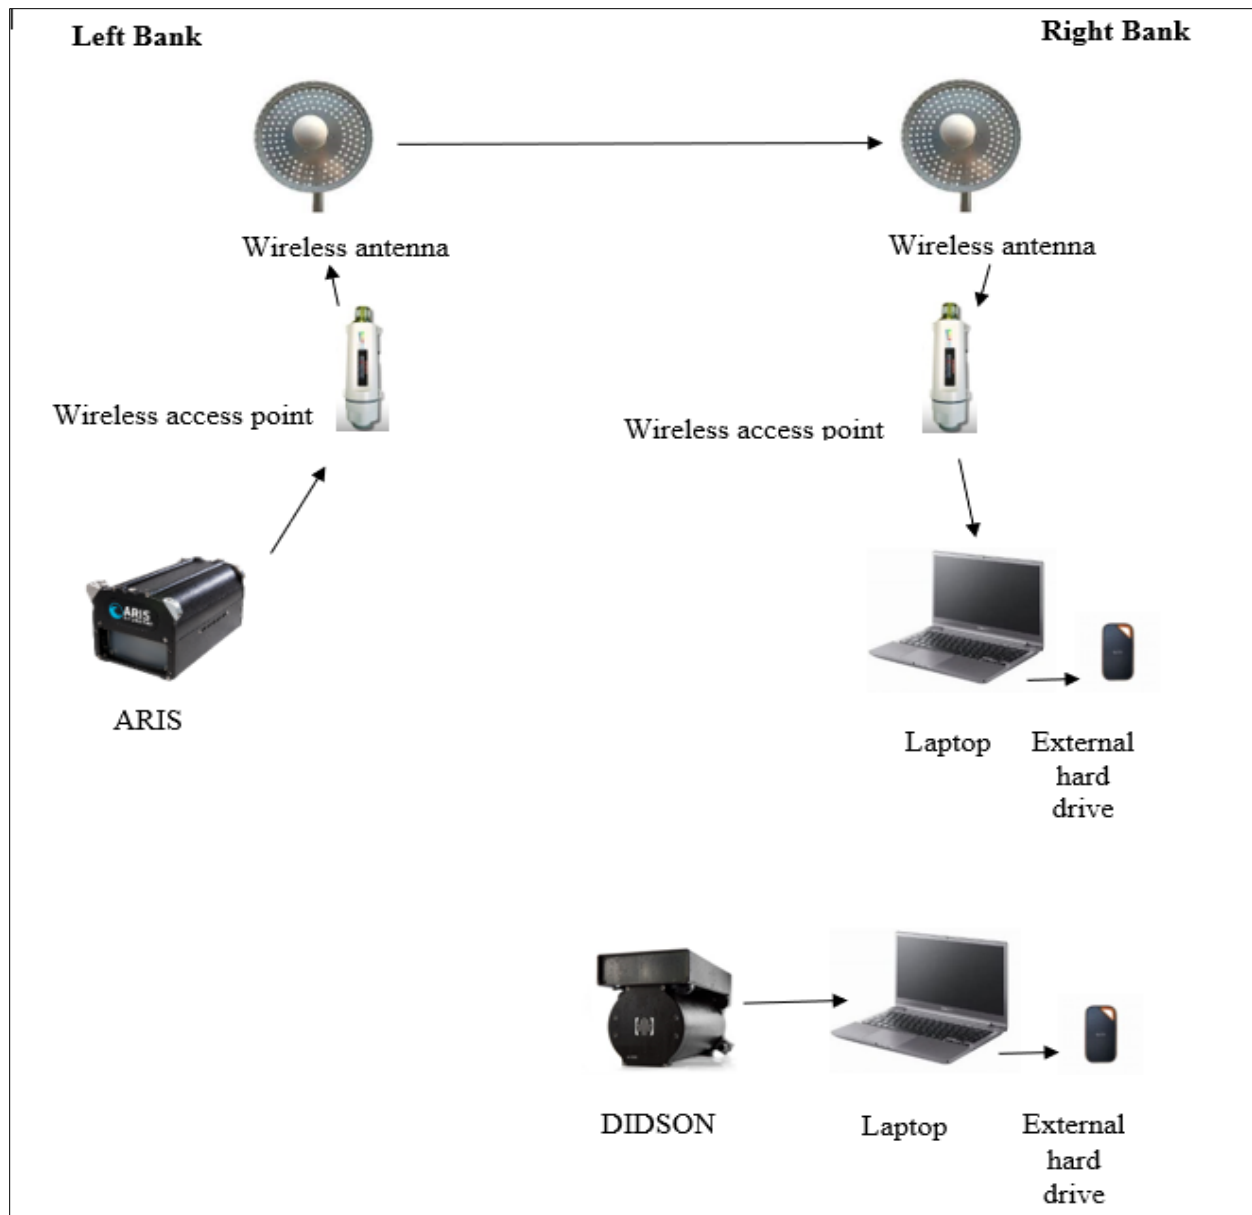


Figure 3.—ARIS (adaptive resolution imaging) and DIDSON (dual-frequency identification) sonar equipment schematic at the Sheenjek River sonar project, 2024.

Note: Both the left-bank and right-bank laptops were housed in the right-bank sonar tent.



Figure 4.—View of a DIDSON (dual-frequency identification sonar) mounted to an aluminum pod with a manual crank-style rotator at the Sheenjek River sonar project.

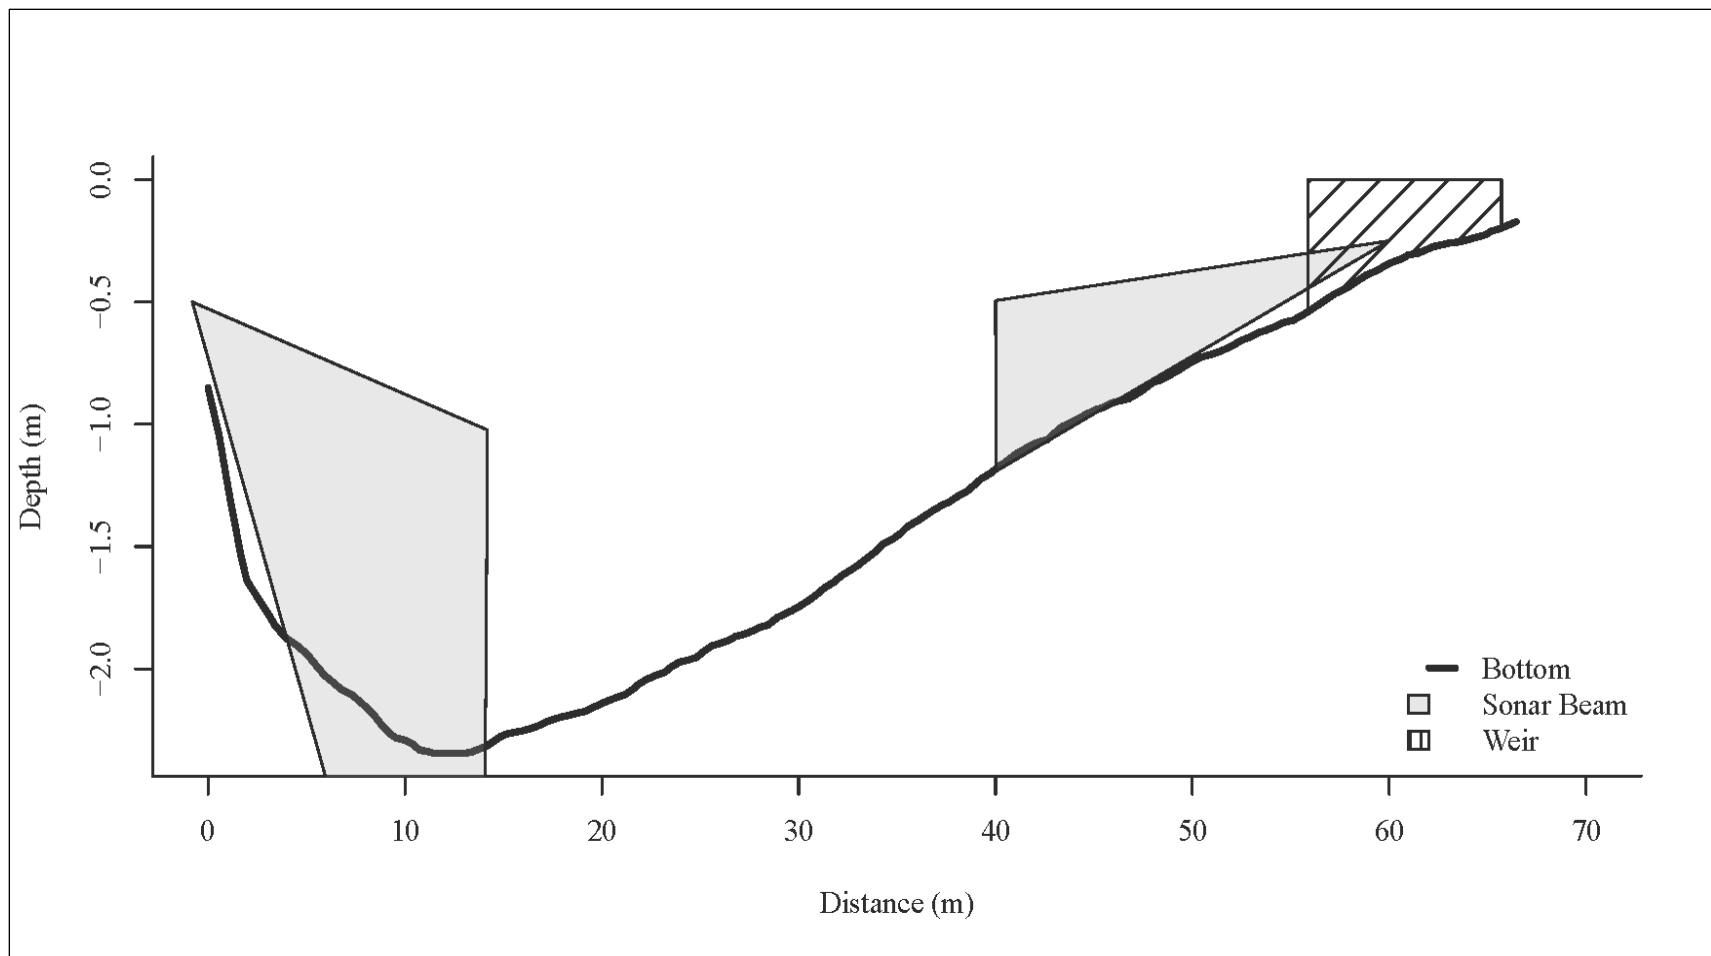


Figure 5.—Depth profile of the Sheenjek River and approximate sonar ranges at the Sheenjek River sonar project, August 4, 2024.

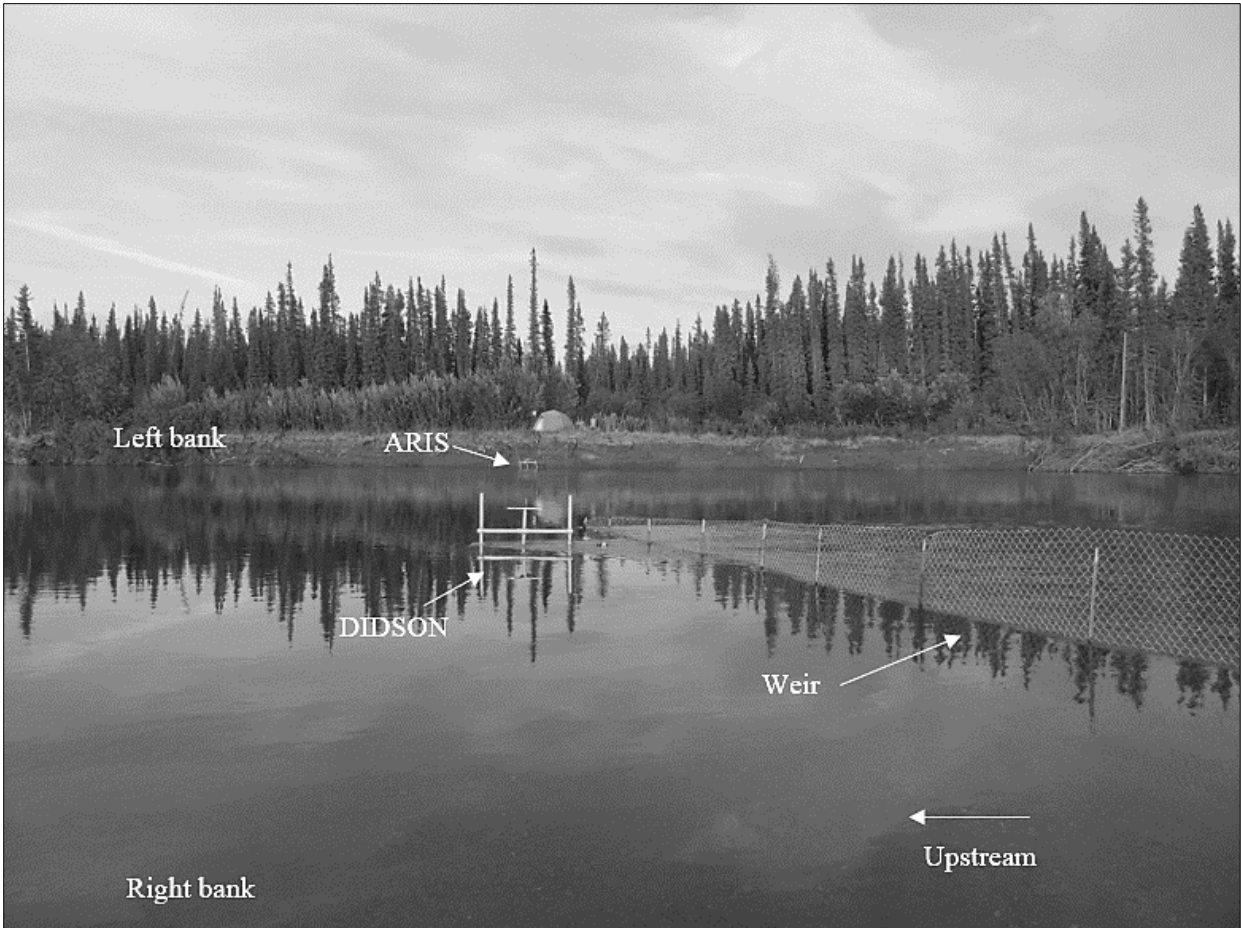


Figure 6.—Sheenjek River sonar project site illustrating locations of ARIS (adaptive resolution imaging) and DIDSON (dual-frequency identification) sonars and weir.

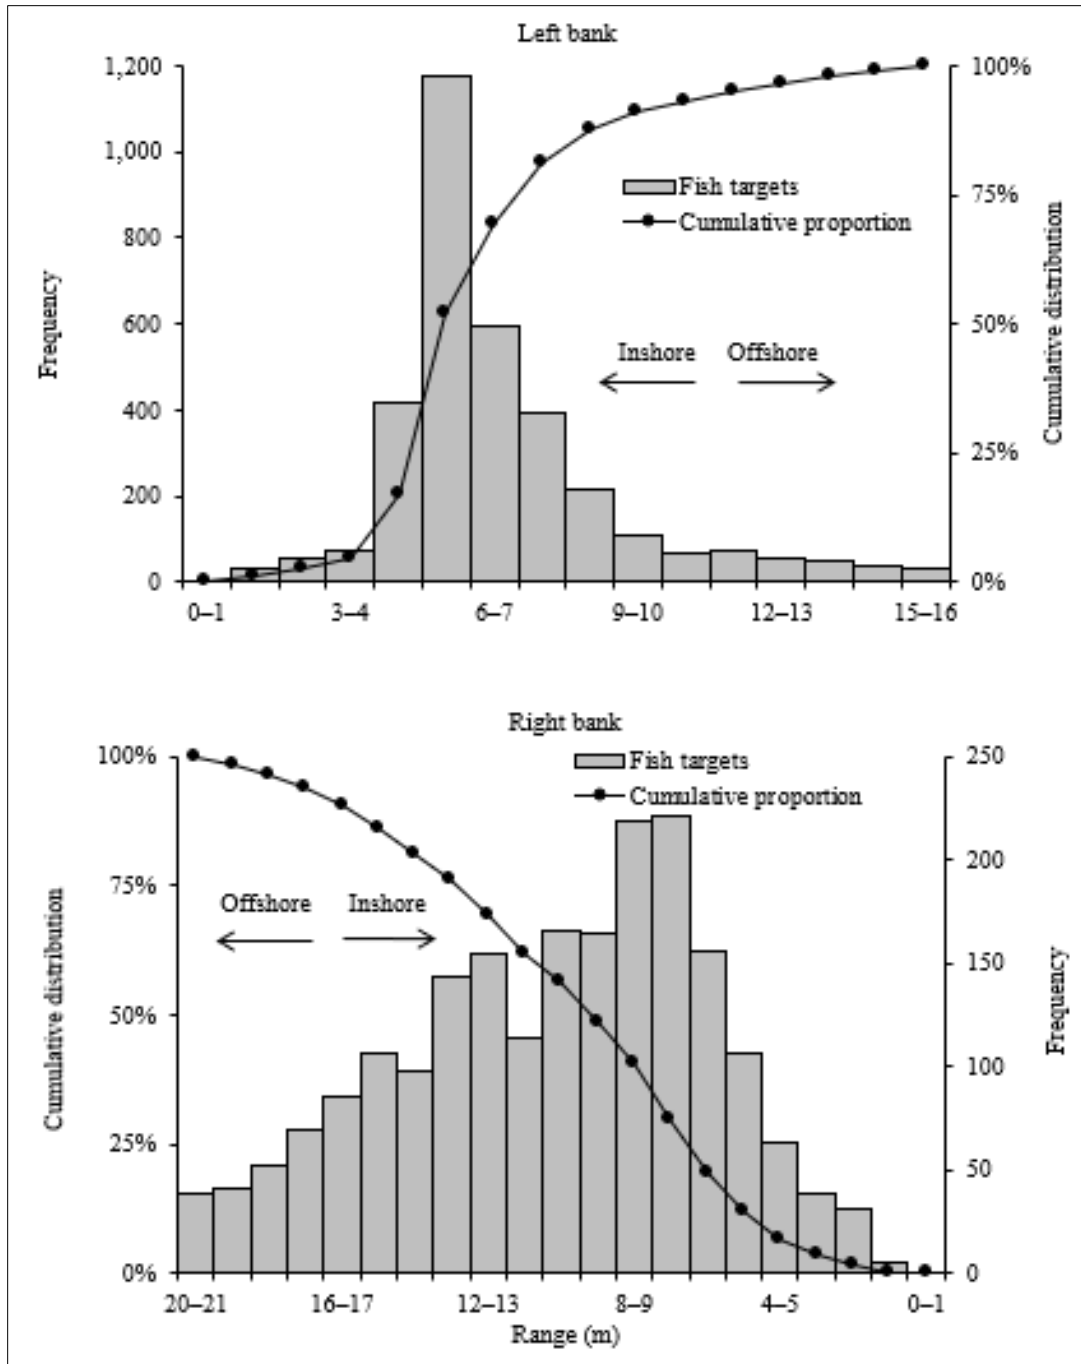


Figure 7.–Left- and right-bank horizontal distribution of unexpanded fish targets at the Sheenjek River sonar project, August 5–September 25, 2024.

Note: The left-bank ensonified range was 15 m. The right-bank ensonified range was 20 m.

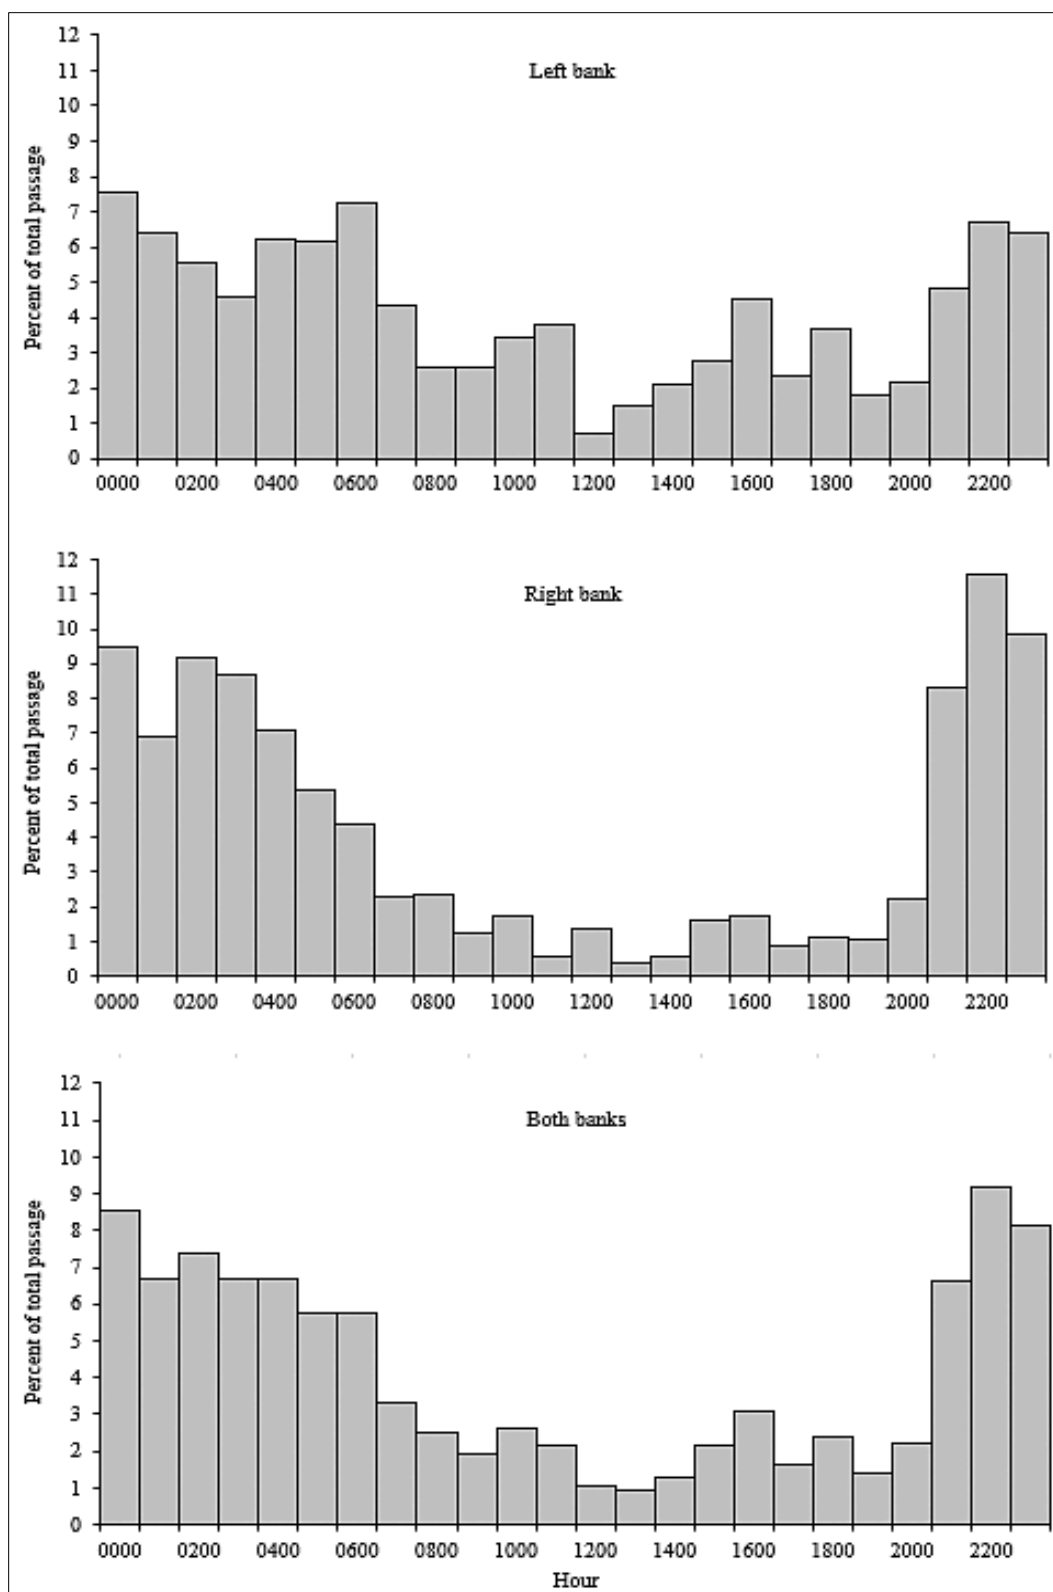


Figure 8.—Percent of total passage, by hour, observed on the left bank, right bank, and both banks combined at the Sheenjek River sonar project, 2024.

Note: Days with missing hourly passage rates were included in the calculations.

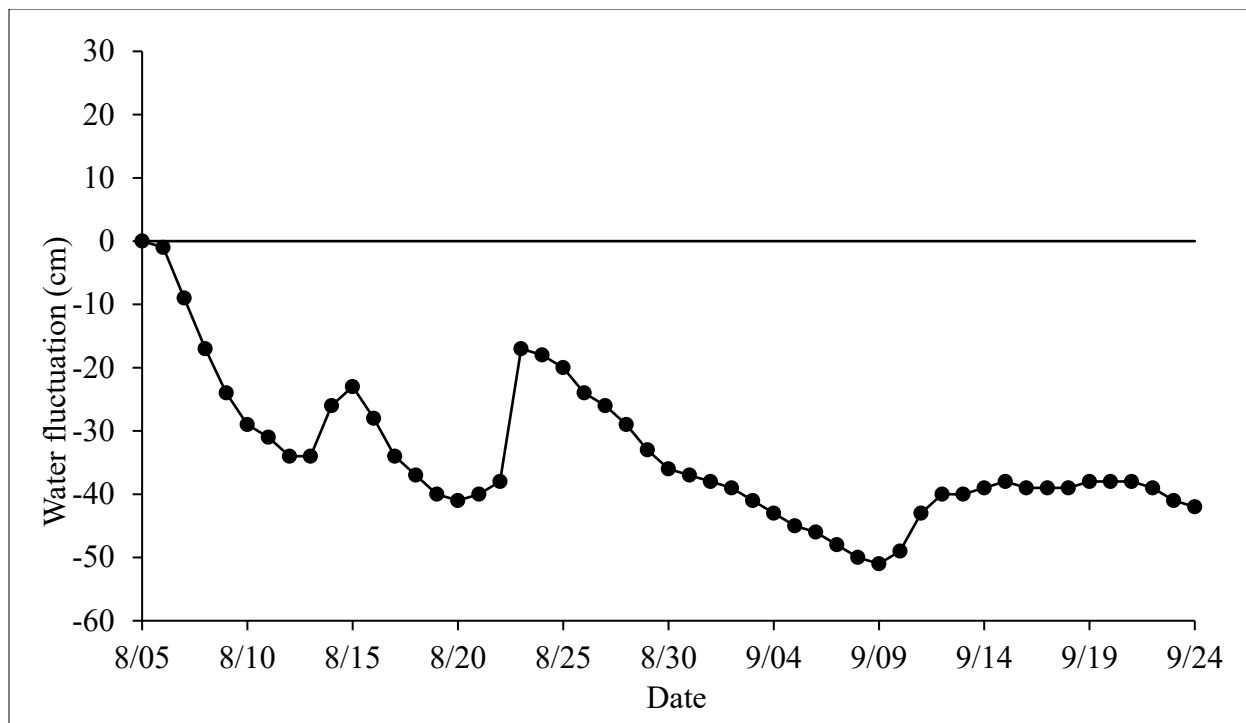


Figure 9.—Change in daily water elevation, relative to August 5, measured at the Sheenjek River sonar project, 2024.

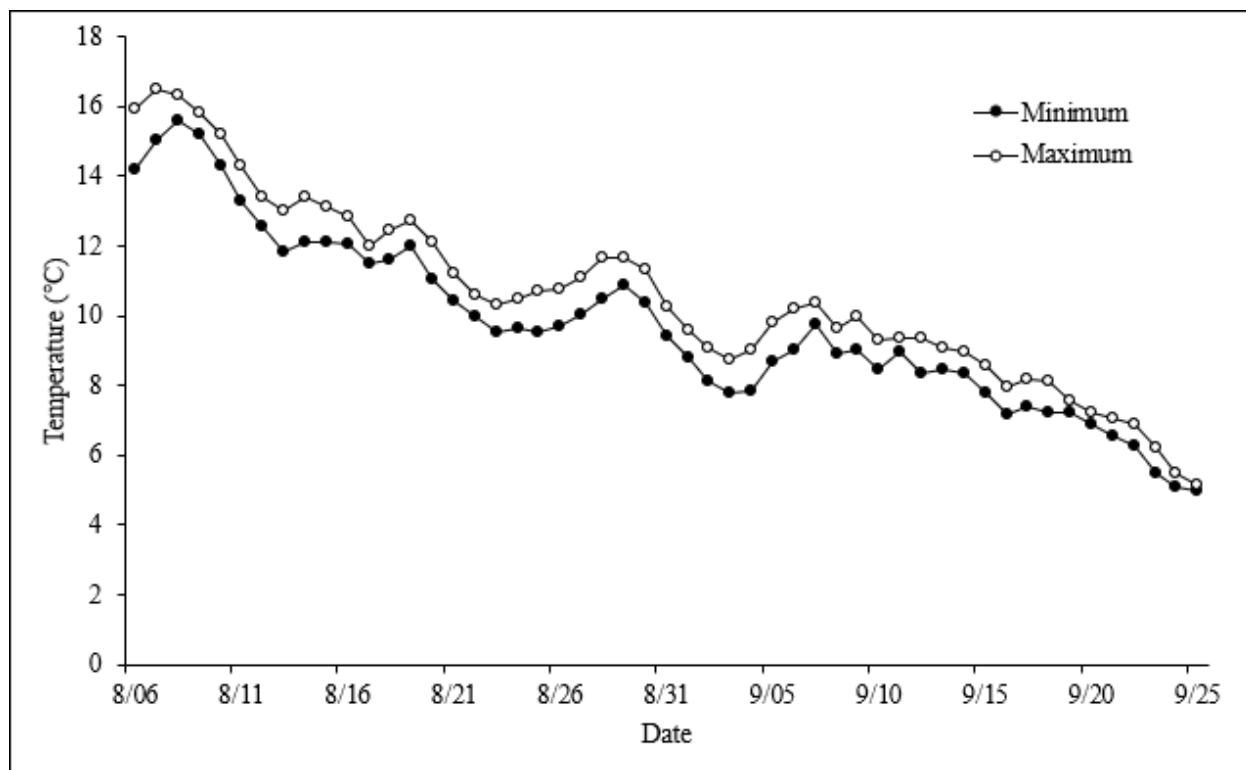


Figure 10.—Maximum and minimum daily water temperatures on the right bank at the Sheenjek River sonar project, 2024.

Note: Water temperature was measured using a HOBO data logger, which electronically recorded the temperature every hour, on the hour.